

Date:	
Project Name:	
SKU #:	

**Contemporary Vanity**  
Flush Wall Mounted



**MOUNTING OPTIONS**



Flush Mount  
(Standard)

**APPLICATIONS**

Residential, Commercial, Multi-Family Complex

**FEATURES**

**Construction**

- Die-formed Cold-rolled Steel
- Powder Coated Paint

**Finish**

- Brushed Nickel
- Black\*
- White\*

**Electrical & Technical**

- Input Voltage: 120-277V
- Input Frequency: 60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/ 3000K/ 3500K/4000K/5000K
- Operating Temp.: 4 °F~104 °F
- Damp Location Rated

**Optical**

- High Transmission
- White Acrylic Lens
- 270° Beam Angle

**Installation/Mounting**

- Flush Wall Mounted

**Controls**

- Triac Dimming

**Compliance**

- JA8 TITLE 24 Compliant at 90CRI

**Dimmer Compatibility List:**

Leviton: IPL06-10Z, 6672-1LW, 6674-P0W, DLS06-1LZ  
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

**Lumen Output**

- 2'/25W: 2,000lm
- 3'/30W: 2,400lm
- 4'/35W: 2,800lm

**Warranty**


- 5 Year Warranty
- See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: VF-2425-CC-U-BN-90CRI**

Series	Size/Wattage	CCT	Input Voltage	Finish	CRI
VF	2425 - 24"/25W 3630 - 36"/30W 4835 - 48"/35W	CC - 2700K/3000K/3500K/4000K/5000K	U - 120-277V	BN - Brushed Nickel BK - Black* WH - White*	90CRI

## DIMENSIONS

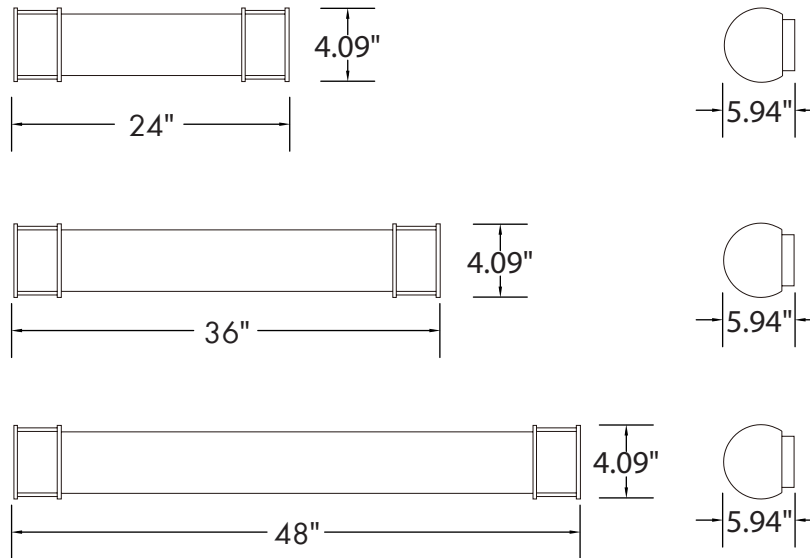

## LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
VF-2425-CC-U-BN-90CRI	24	25	2000	80
VF-3630-CC-U-BN-90CRI	36	30	2400	80
VF-4835-CC-U-BN-90CRI	48	35	2800	80