INDOOR

tgs

Date:	
Project Name:	
Sku #:	

CONTOUR™ T24

Architectural Troffer

3CCT Field Selectable

APPLICATIONS

Commercial, Retail, Institution, and Hospitality

FEATURES

Construction

- Extruded Aluminum Housing
- Backlit

Finish

- Powder Coated White

Electrical & Technical

- Input Voltage: 110-277V
- Input Frequency: 50/60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 3500K/4000K/5000K
- Field Adjustable Lumen Output
- Operating Temp.: -4°F~104°F
- Class 2 Driver (1-10V Dimming)
- Damp Location Rated
- Emergency Battery Backup [Option] [Factory Installed]
- 15W Emergency Inverter [Option]
- 10W Bodine Inverter [Option]

Optical

- 120° Beam Angle

Installation/Mounting

- Recessed Mount

Controls

- 0-10V Dimming (Dims to 10%)
- Lutron Vive PowPak [Option][Factory Installed]

Dimmer Compatibility List:

Leviton: IP-710-DL
Lutron: Diva-Dvtv

Warranty

- 5 Year Warranty

See warranty documentation for more information.

Lumen Output

1'x4' and 2'x2':
- 25W: 2,750lm
- 30W: 3,300lm
- 35W: 3,850lm

2'x4':
- 30W: 3,300lm
- 40W: 4,400lm
- 50W: 5,500lm

VIVE by LUTRON · 90+ CRI · Damp Location · c UL us LISTED · CALIFORNIA JA8 TITLE 24 COMPLIANT LAMP

ORDERING INFORMATION

EXAMPLE: CT-22-25-C-U-90CRI

CT

Series	Size	Wattage	CCT	Input Voltage	CRI
CT	14 - 1'x4' 22 - 2'x2'	25 - 25W 30 - 30W 35 - 35W	C - 3500K/4000K/5000K	U - 110-277V	90CRI
	24 - 2'x4'	30 - 30W 40 - 40W 50 - 50W			

Accessories
TGS-25W-EM (25W Emergency Battery Backup)
ELIS10CDF (Bodine 10W Inverter)
TGS-15W-INT (EM Inverter 15W)
T-BR-EM (T-Bar Bracket for EM Backup
FCJS0 (Lutron Vive PowPak)

CONTOUR™ T24

Architectural Troffer

DIMENSIONS

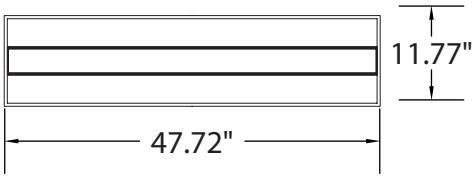

Weight: 6.06 lb.



Weight: 4.85 lb.

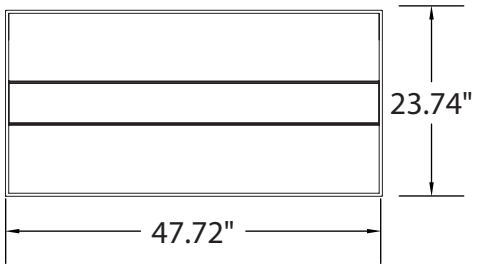

Weight: 9.59 lb.

LUMEN OUTPUT

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
CT-14-25-C-U-90CRI	1'x4'	25	2750	110
CT-14-30-C-U-90CRI	1'x4'	30	3300	110
CT-14-35-C-U-90CRI	1'x4'	35	3850	110
CT-22-25-C-U-90CRI	2'x2'	25	2750	110
CT-22-30-C-U-90CRI	2'x2'	30	3300	110
CT-22-35-C-U-90CRI	2'x2'	35	3850	110
CT-24-30-C-U-90CRI	2'x4'	30	3300	110
CT-24-40-C-U-90CRI	2'x4'	40	4400	110
CT-24-50-C-U-90CRI	2'x4'	50	5500	110

ACCESSORIES

Recessed Mounted Integral Clips [T-bar] (Standard)

Emergency Battery Backup (25W) [Factory Installed] (Option) [TGS-25W-EM]

Bodine Inverter 10W (Option) [ELIS10CDF]

Emergency Inverter 15W (Option) [TGS-15W-INT]

T-Bar Emergency Battery Bracket (Option) [T-BR-EM]

Lutron Vive PowPak [Factory Installed] (Option) [FCJS0]