INDOOR

tgs

Date:	
Project Name:	
Sku #:	

CONTOUR™ Troffer

Wattage & CCT Selectable Architectural Troffer

Power Selectable

3CCT

Field Selectable

APPLICATIONS

Commercial, Retail, Institution, and Hospitality

FEATURES

Construction

- Extruded Aluminum Housing
- Backlit

Finish

- White [Powered Coated]

Electrical & Technical

- Input Voltage: 110-277V
- Input Frequency: 50/60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >80
- THD: <20%
- CCT Selectable: 3500K/4000K/5000K
- Field Adjustable Lumen Output
- Operating Temp.: -4°F~104°F
- Class 2 Driver (1-10V Dimming)
- Damp Location Rated
- Emergency Battery Backup [Option] [Factory Installed]
- 15W Emergency Inverter [Option]
- 10W Bodine Inverter [Option]
- City of Chicago Environmental Air (CCEA) Rated [Option]

Optical

- Beam Angle:120°

Installation/Mounting

- Recessed Mount [Standard]

Controls

- 0-10V Dimming (Dims to 10%)
- Lutron Vive PowPak [Option][Factory Installed]

Dimmer Compatibility List:

Leviton: IP-710-DL
Lutron: Diva-Dvtv

Warranty

- 5 Year Warranty

See warranty documentation for more information.

Lumen Output

- 1'x4': 25W (2,750lm)/30W (3,300lm)/35W (3,850lm)
- 2'x2': 25W (2,750lm)/30W (3,300lm)/35W (3,850lm)
- 2'x4': 30W (3,300lm)/40W (4,400lm)/50W (5,500lm)

VIVE by LUTRON

CCEA CHICAGO PLENUM COMPLIANT

Damp Location

c UL us LISTED

DLC LISTED

Not all products are qualified on the DLC® QPL. To view our DLC® qualified products, please consult the DLC® Qualified Products List at www.designlights.org/qpl.

ORDERING INFORMATION

EXAMPLE: CT-22WS-C-U

CT					
Series	**Size**	**Wattage**	**CCT**	**Input Voltage**	**Chicago Plenum**
CT	14 - 1'x4' 22 - 2'x2'	WS - 25W/30W/35W	C - 3500K/4000K/5000K	U - 110-277V	CP - Chicago Plenum CCEA Rated [Option]
	24 - 2'x4'	WS - 30W/40W/50W			

Note:

- Chicago Plenum CCEA Rated Option must be pre-determined wattage and CCT when ordering.

Accessories
TGS-25W-EM (25W Emergency Battery Backup)
ELIS10CDF (Bodine 10W Inverter)
TGS-15W-INT (EM Inverter 15W)
T-BR-EM (T-Bar Bracket for EM Backup
FCJS0 (Lutron Vive PowPak)

CONTOUR™ Troffer

Wattage & CCT Selectable Architectural Troffer

DIMENSIONS

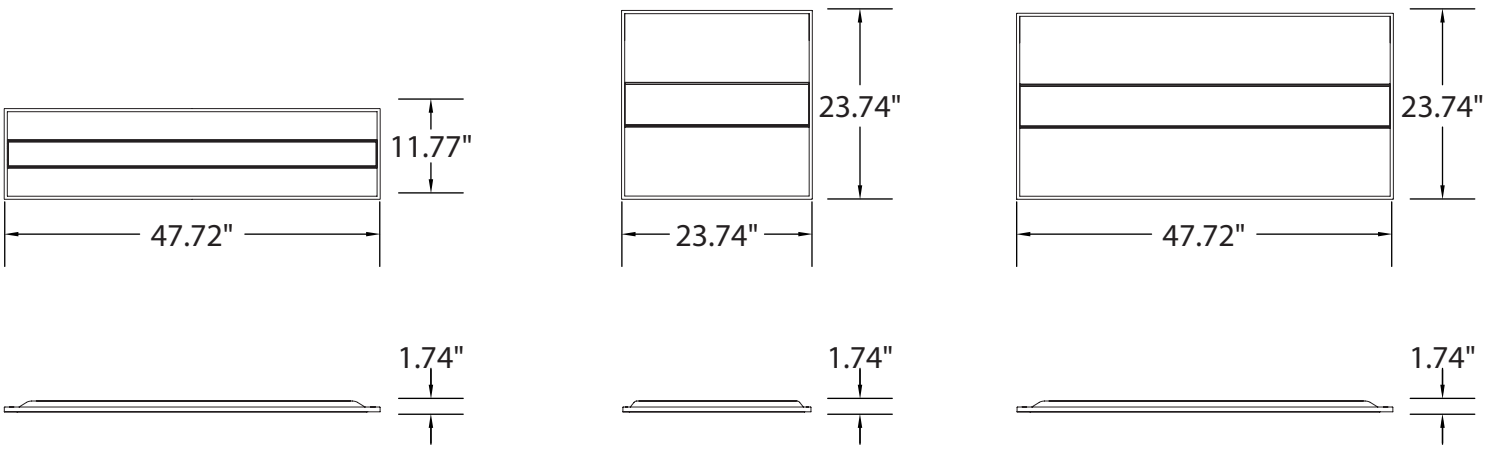

Weight: 6.06 lb.

Weight: 4.85 lb.

Weight: 9.59 lb.

LUMEN OUTPUT

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
CT-14WS-C-U	1'x4'	25/30/35	2750 (25W)	110	3300 (30W)	110	3850 (35W)	110
CT-22WS-C-U	2'x2'	25/30/35	2750 (25W)	110	3300 (30W)	110	3850 (35W)	110
CT-24WS-C-U	2'x4'	30/40/50	3300 (30W)	110	4400 (40W)	110	5500 (40W)	110

ACCESSORIES

Recessed Mounted Integral Clips [T-bar] (Standard)

High Voltage Emergency Battery Backup (25W) [Factory Installed] (Option) [TGS-25W-EM]

Bodine Inverter 10W (Option) [ELIS10CDF]

Emergency Inverter 15W (Option) [TGS-15W-INT]

T-Bar Emergency Battery Bracket (Option) [T-BR-EM]

Lutron Vive PowPak [Factory Installed] (Option) [FCJS0]