INDOOR

tgs

Date:	
Project Name:	
Sku #:	

ECLIPSE™

Pendant/Surface Architectural Round

MOUNTING OPTIONS

Cable Mount
[CM10]

Pendant Mount
[Stem Not Included]
(Option)
[PM]

Surface Mount
(Option)
[SM]

APPLICATIONS

Commericial, Retail, Office, Public Spaces

FEATURES

Construction
- Aluminum Shallow Housing
- Powder Coated Finish

Electrical & Technical
- Input Voltage: 120-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 3000K, 3500K, 4000K, 5000K
- Operating Temp.: -4°F~104°F
- IP Rating: IP20

Controls
- 0-10V Dimming

Lumen Output
- 40W: 3,400lm
- 80W: 6,800lm
- 90W: 7,650lm
- 120W: 10,200lm
- 180W: 15,300lm
- 220W: 18,700lm

Finish
BW - Black /White
BB - Black/Black
WW - White/White
WB - White/Black
CC - Custom RAL Color*

Optical
- Direct Only [Option]
- Direct/Indirect [Option]

Installation/Mounting
- Cable Mount
  - Available Lengths: 10' [Standard]
- Surface Mount Option
- Pendant Mount Option [Stem Not Included]

Warranty
- 5 Year Warranty
  See warranty documentation for more information.

OUTER/INNER COLOR COMBINATIONS

Standard

Black/White Black/Black White/White White/Black

Custom*

Black/Red Black/Yellow Black/Blue Black/Green White/Red White/Yellow White/Blue

White/Green

90+ CRI

Intertek

RoHS Compliant

ORDERING INFORMATION

EXAMPLE: ECL-24-40-40-U-D1-BW-CM10-D

ECL

Series	Size	Wattage	CCT	Input Voltage	Control	Finish	Mounting Option	Illumination Option
ECL	24 - 24"	40 - 40W	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	U - 120-277V	D1 - 0 -10V Dimming	STANDARD BW - Black/White BB - Black/Black WW - White/White WB - White/Black CUSTOM* CC - Custom RAL	CM10 - 10' Cable Mount SM - Surface Mount PM - Pendant Mount	D - Direct Illumination
	36 - 36"	90 - 90W						
	48 - 48"	180 - 180W						
	24 - 24"	80 - 80W	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	U - 120-277V	D1 - 0 -10V Dimming		CM10 - 10' Cable Mount SM - Surface Mount PM - Pendant Mount	U - Uplight/Direct Illumination
	36 - 36"	120 - 120W						
	48 - 48"	220 - 220W						

ECLIPSE™

Pendant/Surface Architectural Round

DIMENSIONS

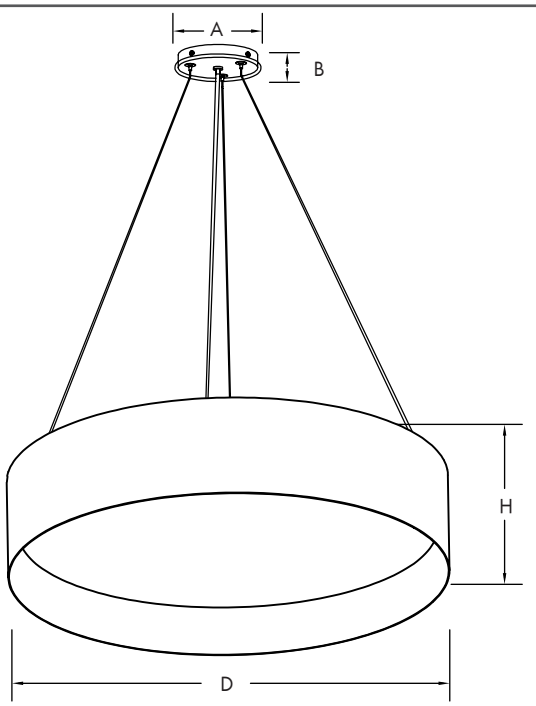

Cable Mount

Size	Height (H)	Diameter (D)	Canopy Height (B)	Canopy Diameter (A)
ECL-24-40	5.5"	ø23.6"	1.38"	ø10.0"
ECL-24-80	5.5"	ø23.6"	1.38"	ø10.0"
ECL-36-90	5.5"	ø35.4"	1.38"	ø10.0"
ECL-36-120	5.5"	ø35.4"	1.38"	ø10.0"
ECL-48-180	5.5"	ø47.2"	1.38"	ø10.0"
ECL-48-220	5.5"	ø47.2"	1.38"	ø10.0"

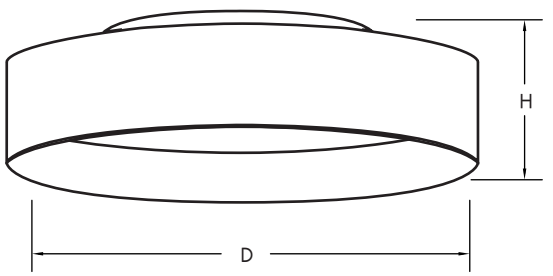

Surface Mount

Size	Height (H)	Diameter (D)
ECL-24-40	6.9"	ø23.6"
ECL-24-80	6.9"	ø23.6"
ECL-36-90	6.9"	ø35.4"
ECL-36-120	6.9"	ø35.4"
ECL-48-180	6.9"	ø47.2"
ECL-48-220	6.9"	ø47.2"