INDOOR

tgs

Date:	
Project Name:	
Sku #:	

ELEMENT™ 2

Direct/Indirect Architectural Troffer

Power Selectable

4CCT

Field Selectable

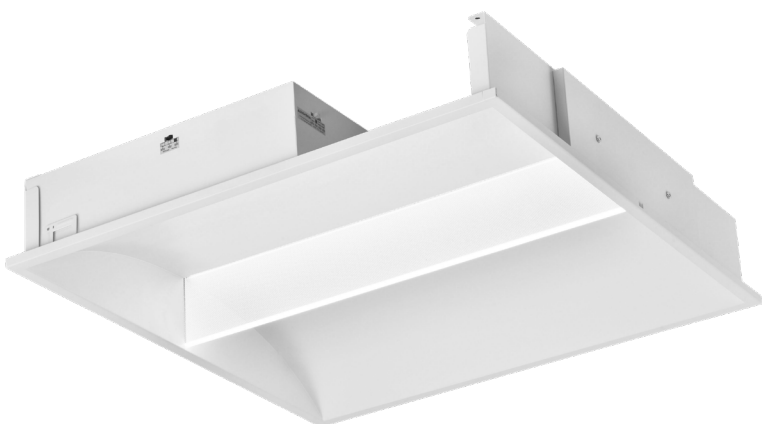

APPLICATIONS

Commercial, Retail, Institution, and Hospitality

FEATURES

Construction

- 0.5mm Die-formed Cold-Rolled Steel Body

Finish

- White

Electrical & Technical

- Input Voltage: 100-277VAC
- Input Frequency: 50/60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >80
- THD: <20%
- Field- Adjustable Lumen Output
- CCT Selectable: 3000K/3500K/ 4000K/5000K
- Operating Temp.: -4°F~113°F
- Emergency Battery Backup Driver [Option] [Factory Install]
- Damp Location Rated

Optical

- 120° Beam Angle

Controls

- 0-10V Dimming [Standard]
- Lutron Vive PowPak [Option][Factory Install]

Installation/Mounting

- Recessed Mount
- Flange Kit

Lumen Output

- 1'x4':
  - 24W (2,760lm)
  - 36W (4,140lm)
  - 42W (4,830lm)
  - 50W (5,750lm)
- 2'x4':
  - 30W (3,450lm)
  - 35W (4,025lm)
  - 40W (4,600lm)
  - 50W (5,750lm)
- 2'x2':
  - 24W (2,760lm)
  - 35W (4,025lm)
  - 40W (4,600lm)
- 2'x4'*:
  - 50W (5,750lm)
  - 60W (6,900lm)
  - 72W (8,280lm)

Warranty

- 5 Year Warranty

See warranty documentation for more information.

VIVE by LUTRON

Damp Location

80+ CRI

Intertek

ORDERING INFORMATION

EXAMPLE: ELE2-22-W-C-U-D

ELE2

Series	Size	Wattage	CCT	Input Voltage	Dimming	Emergency Driver
ELE2	14 - 1'x4'	W - 24W/36W/42W/50W	C - 3000K/3500K/4000K/5000K	U - 100-277V	D - 0-10V Dimming	(Blank) No Emergency Driver EM - 8W Emergency Driver
	22 - 2'x2'	W - 24W/35W/40W				
	24 - 2'x4'	W1 - 30W/35W/40W/50W W2 - 50W/60W/72W*				

Flange Mount Kit	Accessory
8822-FMK (2x2 Flange Mount Kit) 8824-FMK (2x4 Flange Mount Kit)	FCJS0 (Lutron Vive Powpak)

ELEMENT™ 2

Direct/Indirect Architectural Troffer

DIMENSIONS

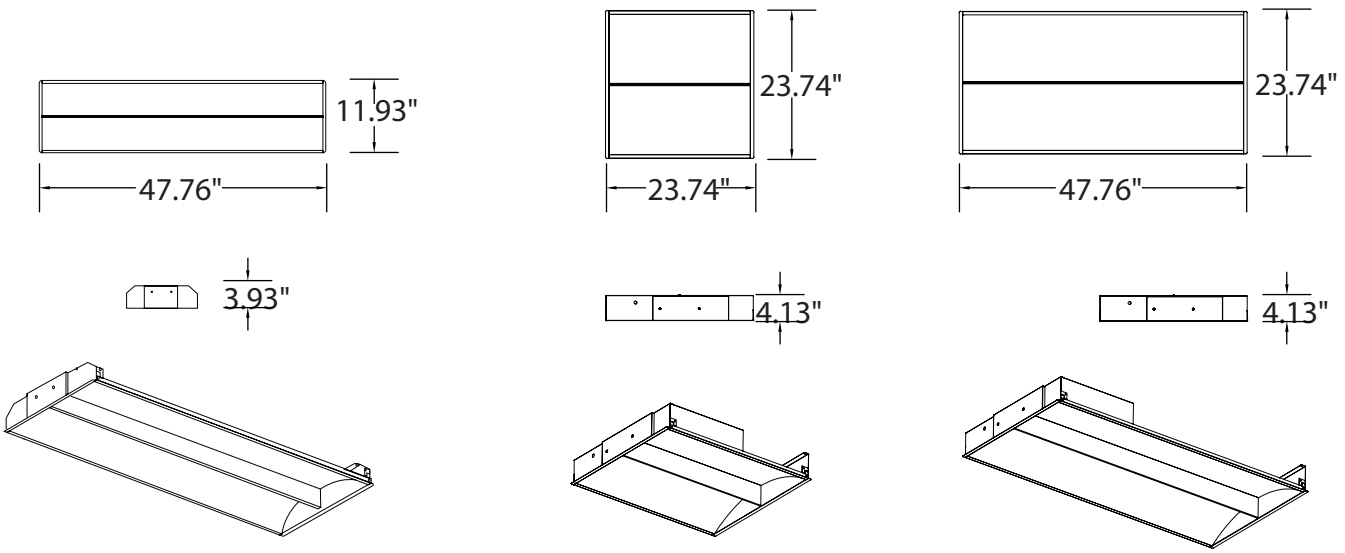

Weight: 8.14 lb.

Weight: 8.14 lb.

Weight: 14.17 lb.

LUMEN OUTPUT

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ELE2-14-W-C-U	1'x4'	24/36/42/50	2760 (24W)	115	4140 (36W)	115	4830 (42W)	115	5750 (50W)	115

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ELE2-22-W-C-U	2'x2'	24/35/40	2760 (24W)	115	4025 (35W)	115	4600 (40W)	115

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ELE2-24-W1-C-U	2'x4'	30/35/40/50	3450 (30W)	115	4025 (35W)	115	4600 (40W)	115	5750 (50W)	115

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ELE2-24-W2-C-U	2'x4'	50/60/72	5750 (50W)	115	6900 (60W)	115	8280 (72W)	115

ACCESSORIES

8W Emergency
Battery Backup
[Factory Installed]
(Option)
[EM]

Lutron Vive
PowPak
[Factory Installed]
(Option)
[FCJS0]

Flange
Mount Kit
2'x2', 2'x4'
(Option)
[8822-FMK]
[8824-FMK]

9601 Variel Ave, Chatsworth, CA 91311
(818) - 206 - 4404

Specifications & dimensions subject to change without notice.
*MOQ & longer lead times may apply, please contact customer service for more information.