


Date:	
Project Name:	
Sku #:	

Universal™ RK Plate
HID Replacement

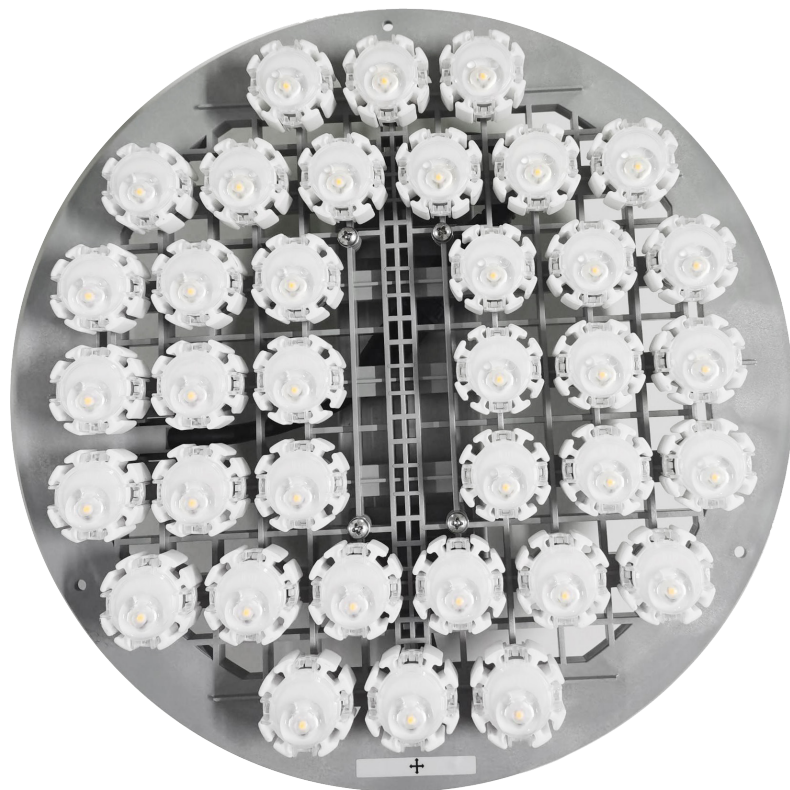

APPLICATIONS

Street Lights, Tear Drop Post Tops, Decorative Lamps

FEATURES

Construction

- Ceramic Heat Sink
- Independent Pixel Heatsink Technology
- Withstand Harsh Environments

Finish

- White

Electrical & Technical

- Input Voltage: 120-277V
347/480V* [Option]
- Input Frequency: 50/60Hz
- Projected Life: L70 > 54,000 hrs
- PF: >0.95
- CRI: >70
- THD: <15%
- CCT: 3000K, 4000K or 5000K
- Operating Temp.: -13°F ~ 131°F
- IP Rating: IP65
- Powered by IP65 Driver

Optical

- PC Optic Lens:
- Individually Customized
- Type III Distribution Option
- Type V Distribution Option

Installation/Mounting

- Retrofit Kit with IP65 Mounted Driver

Lumen Output

- 30W: 3,900lm
- 46W: 5,980lm
- 78W: 10,140lm
- 90W: 11,700lm
- 120W: 15,600lm

Warranty

- 5 Year Warranty
See warranty documentation for more information.




ORDERING INFORMATION **EXAMPLE: 318060-30-RK-3-U**


Series	Wattage	CCT	Series Type	Distribution	Distribution	Input Voltage
318	030 - 30W 046 - 46W 078 - 78W 090 - 90W 120 - 120W	30 - 3000K 40 - 4000K 50 - 5000K	RK	3 - Type III 5 - Type V	[Blank] - Standard size 13* - 13.5" Diameter (Custom Size Available for 90W & 100W)	U - 120-277V H - 347V/480V*

DIMENSIONS



30W/46W




Weight: 5.51 lb.




78W/90W




Weight: 6.04 lb.




120W



Weight: 7.45 lb.



Driver Dimensions

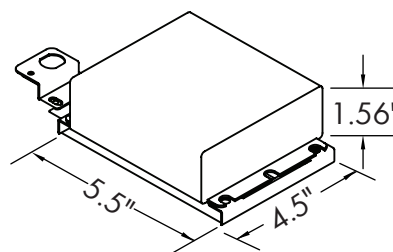

LUMEN OUTPUT

SKU	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
318030-40-RK-3-U	30	3900	130
318046-40-RK-3-U	46	5980	130
318078-40-RK-3-U	78	10140	130
318090-40-RK-3-U	90	11700	130
318120-40-RK-3-U	120	15600	130