

Date:	
Project Name:	
SKU #:	

### Contemporary Vanity I

Wall Mounted



#### MOUNTING OPTIONS



Flush Mount  
(Standard)

#### APPLICATIONS

Bathroom, Bedroom, Dressing Room, Etc

#### FEATURES

##### Construction

- Die-formed Cold-Rolled Steel
- Powder Coated Paint

##### Finish

- Brushed Nickel
- Black\*
- White\*

##### Electrical & Technical

- Input Voltage: 120-277V
- Input Frequency: 50/60Hz
- Projected L70 > 50,000 hrs
- PF: >0.95
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/ 3000K/ 3500K/4000K/5000K
- Operating Temp.: -4°F ~ 113°F
- Damp Location Rated

##### Optical

- High Transmission White Acrylic Lens
- 270° Beam Angle

##### Installation/Mounting

- Wall Mounted

##### Controls

- Triac Dimming @ 120V

##### Compliance

- JA8 TITLE 24 Compliant at 90CRI
- 120-277V [Not Energy Star]

##### Lumen Output

- 120-277V:
- 18"/20W: 1,500lm
  - 24"/25W: 2,000lm
  - 36"/30W: 2,400lm
  - 48"/35W: 2,800lm

##### Warranty

- 5 Year Warranty
- See warranty documentation for more information.




## ORDERING INFORMATION

EXAMPLE: VF1-2425-CC-U-BN-90CRI

VF1					
Series	Size/Wattage	CCT	Input Voltage	Finish	CRI
VF1	1820 - 18"/20W 2425 - 24"/25W 3630 - 36"/30W 4835 - 48"/35W	CC - 2700K/3000K/3500K/4000K/5000K	U - 120-277V	BN - Brushed Nickel BK - Black* WH - White*	90CRI

**DIMENSIONS**

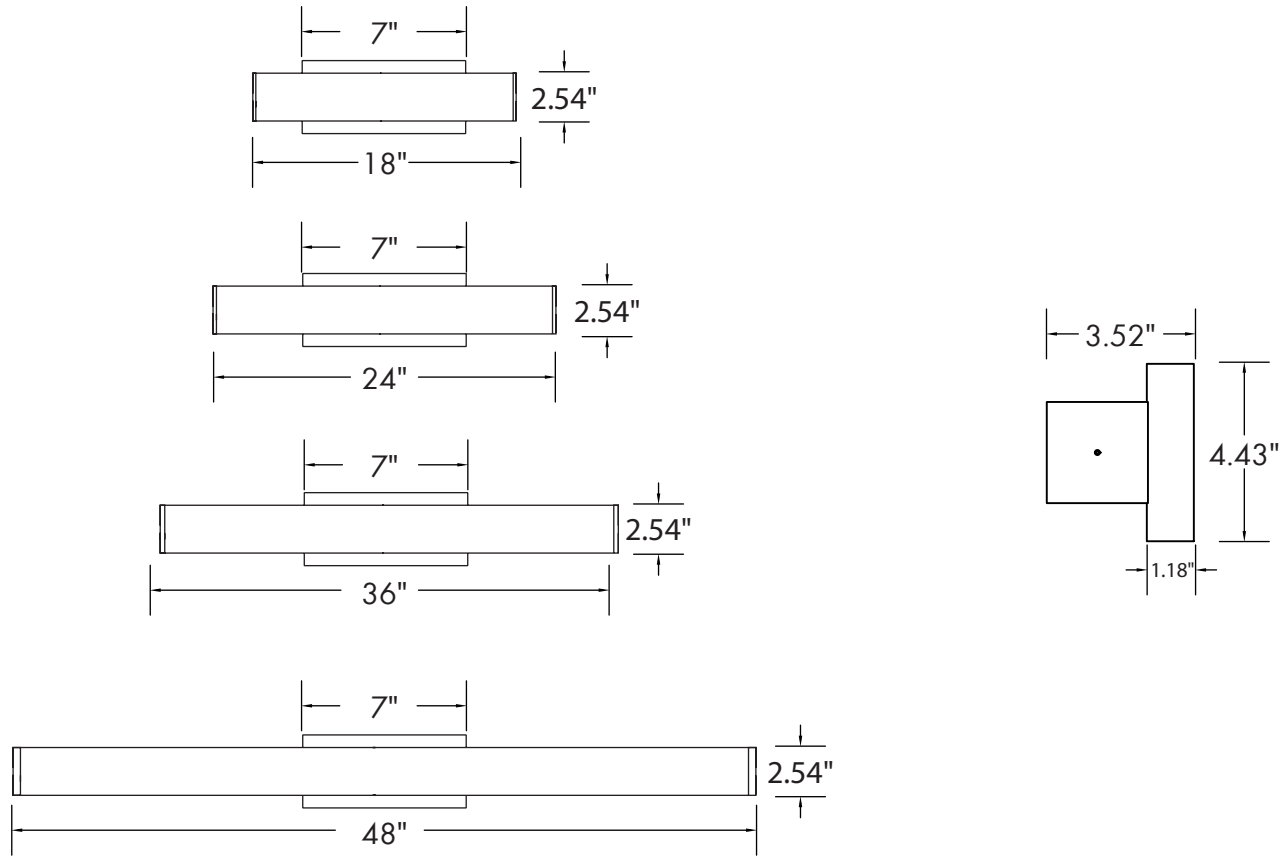

**LUMEN OUTPUT**

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
VF1-1820-CC-U-BN-90CRI	18	20	1500	75
VF1-2425-CC-U-BN-90CRI	24	25	2000	80
VF1-3630-CC-U-BN-90CRI	36	30	2400	80
VF1-4835-CC-U-BN-90CRI	48	35	2650	76