OUTDOOR

tgs

Date:	
Project Name:	
Sku #:	

CUDWR™

Cylinder Up and Down Light Wall Mounted

Power Selectable

5CCT

Field Selectable

APPLICATIONS

Residential, Commercial, Multi-Family, Hospitality

FEATURES

Construction

- Die-cast Aluminum Base
- Spun Aluminum Body
- Per ANSI C136.31-2001: 3G Vibration
- Corrision Resistant Finish

Finish

- Black
- Bronze
- Grey*
- White*

Electrical & Technical

- Input Voltage: 110-277V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/ 3500K/4000K/5000K
- Operating Temp.: -13°F~104°F
- Suitable for Wet Location
- Integral 2.5kV Surge Suppression Protection [Standard]

Optical

- Precision-Molded Acrylic Lenses

Installation/Mounting

- Wall Mounted: Suitable for 3" & 4" Junction Box

Compliance

- JA8 TITLE 24 Compliant

Lumen Output

- 10W: 1,000lm: Uplight: 500lm/Down: 500lm
- 15W: 1,500lm: Uplight: 750lm/Down: 750lm
- 20W: 2,000lm: Uplight: 1,000lm/Down: 1,000lm

Warranty

- 5 Year Warranty

See warranty documentation for more information.

FINISHES

Standard

Black Bronze

Custom* [MOQ 200 PCS]

White* Grey*

90+ CRI Wet Location c UL us LISTED CALIFORNIA JA8 TITLE 24 COMPLIANT LAMP

ORDERING INFORMATION

EXAMPLE: CUDWR-0411-L-C-BK-90CRI

CUDWR					
Series	**Size**	**Wattage**	**CCT**	**Finish**	**CRI**
CUDWR	0411 - D: 4"x H: 11"	L - 10W/15W/20W	C - 2700K/3000K/3500K/4000K/5000K	BK - Black BZ - Bronze WH - White* GR - Grey*	90CRI

CUDWR™

Cylinder Up and Down Light Wall Mounted

DIMENSIONS

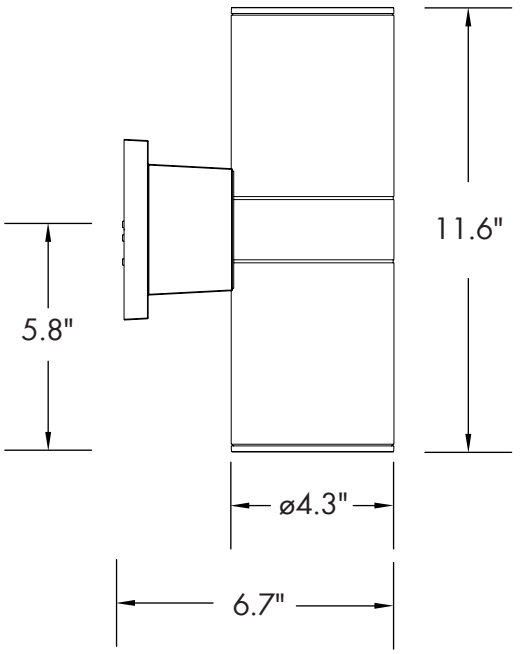

Weight: 3.2 lb.

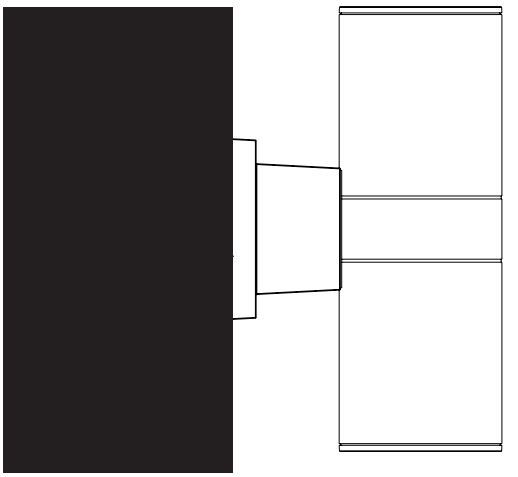

Flush Mount

LUMEN OUTPUT

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
CUDWR-0411-L-C-XX-90CRI	4 x 11	10/15/20	1000	100	1500	100	2000	100