OUTDOOR

tgs

Date:	
Project Name:	
Sku #:	

CSWR™ With EM

Cylinder Wall Mounted

EM Power | Power Selectable | Field Selectable (5CCT)

APPLICATIONS

Residential, Commercial, Multi-Family, Hospitality

FEATURES

Construction

- Die-cast Aluminum Base
- Spun Aluminum Body
- Per ANSI C136.31-2001: 3G Vibration
- Corrision Resistant Finish

Finish

- Black
- Bronze
- Grey*
- White*

Electrical & Technical

- Input Voltage: 110-277V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/ 4000K/5000K
- Operating Temp.: -40°F~122°F
- Suitable for Wet Location
- Integral 2.5kV Surge Suppression Protection [Standard]
- Emergency Battery Backup 4W [Factory Installed]

Optical

- Precision-Molded Acrylic Lenses

Installation/Mounting

- Wall Mounted: Suitable for 3" & 4" Junction Box

Compliance

- JA8 TITLE 24 Compliant

Lumen Output

- 6W: 600lm
- 8W: 800lm
- 10W: 1,000lm

Warranty

- 5 Year Warranty

See warranty documentation for more information.

FINISHES

Standard

Black | Bronze

Custom* [MOQ 200 PCS]

White* | Grey*

90+ CRI | Wet Location | Intertek | CALIFORNIA JA8 TITLE 24 COMPLIANT LAMP

ORDERING INFORMATION

EXAMPLE: CSWR-0406-L-C-BK-90CRI-EM

CSWR

Series	Size	Wattage	CCT	Finish	CRI	Emergency Battery
CSWR	0406 - D:4" x H:6"	L - 6W/8W/10W	C - 2700K/3000K/3500K/4000K/5000K	BK - Black BZ - Bronze WH - White* GR - Grey*	90CRI	EM - 4W Emergency Battery Backup

CSWR™ With EM

Cylinder Wall Mounted

DIMENSIONS

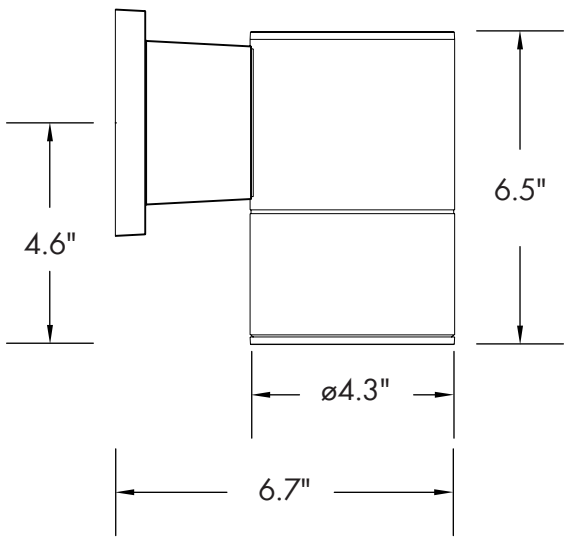

Weight: 2.31 lb.

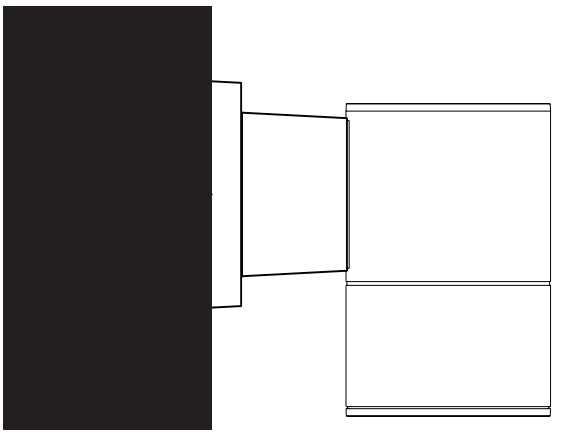

Flush Mount

LUMEN OUTPUT

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
CSWR-0406-L-C-XX-90CRI-EM	4 x 6	6/8/10	600	100	800	100	1000	100

ACCESSORIES

4W Emergency Battery Backup
[Factory Installed]
[EM]