INDOOR

tgs

Date:	
Project Name:	
Sku #:	

Himmel™

Linear Under Cabinet Lighting

5CCT
Field Selectable

APPLICATIONS

Kitchen, Dining Room, Living Room, Dressing Room, Etc

FEATURES

Construction

- Die-cast Aluminum
- Powder Coated Paint

Finish

- White

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- Fire-proof Level: 5VA
- THD: <20%
- CCT Selectable: 2700K/ 3000K/ 3500K/4000K/5000K
- Operating Temp.: -4°F~104°F
- Dry Location Rated

Optical

- Micro-prismatic Diffuser
- Beam Angle: 110°

Installation/Mounting

- Surface Mounted: Under Cabinet
- Connections:
  - Hardwire
  - Plug-in Cable: 47"
- Fixture to Fixture Connections:
  - Junction Connecting Cable: 11.8"
- Daisy Chained Up to 256W

Controls

- On/Off Switch
- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant

Lumen Output

- 12"/6W: 540lm
- 18"/9W: 855lm
- 24"/12W: 1,140lm
- 32"/16W: 1,520lm
- 40"/20W: 1,900lm

Warranty

- 5 Year Warranty

See warranty documentation for more information.

90+ CRI · Dry Location · Intertek · CALIFORNIA JA8 TITLE 24 COMPLIANT LAMP

ORDERING INFORMATION

EXAMPLE: HIM-1206-C-WH

HIM

Series	Length/Wattage	CCT	Finish
HIM	1206 - 12"/6W 1809 - 18"/9W 2412 - 24"/12W 3216 - 32"/16W 4020 - 40"/20W	C - 2700K/3000K/3500K/4000K/5000K	WH - White

Accessories
HIM-PL (AC Plug) HIM-JC (Junction Connecting Cable) HIM-CN (Junction Connecter)

DIMENSIONS

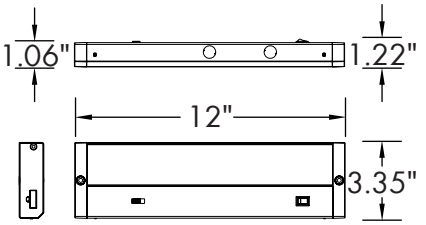
1.06"
1.22"
12"
3.35"

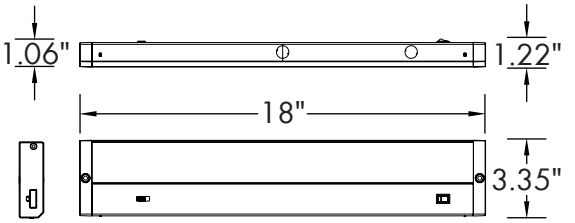
1.06"
1.22"
18"
3.35"

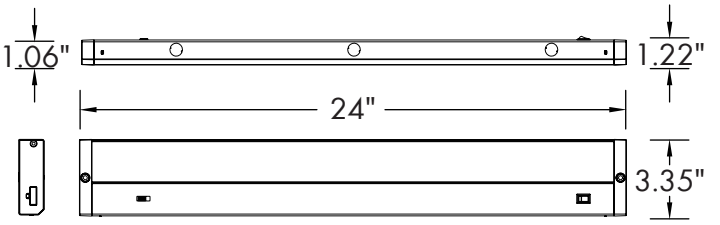
1.06"
1.22"
24"
3.35"

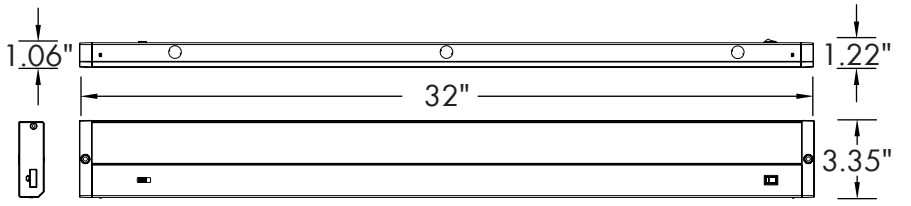
1.06"
1.22"
32"
3.35"

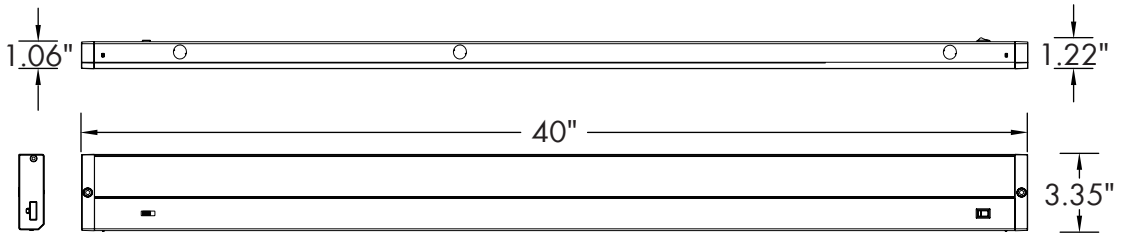
1.06"
1.22"
40"
3.35"

Himmel™

Linear Under Cabinet Lighting

LUMEN OUTPUT

SKU	Length (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
HIM-1206-C-XX	12	6	540	90
HIM-1809-C-XX	18	9	855	95
HIM-2412-C-XX	24	12	1140	95
HIM-3216-C-XX	32	16	1520	95
HIM-4020-C-XX	40	20	1900	95

ACCESSORIES

AC Input Cable
[47"]
[HIM-PL]

Junction Connecting Cable
[11.8"]
[HIM-JC]



Junction Connector
[HIM-CN]

Cable Clamp Connector
(Hardwiring)
[Included]