


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm					
NAME: 二代线条灯			TYPE:下发光 白色外壳		WEIGHT:
DIM.: 2FT			SPEC.:3000K		SERIAL No.:YQ2107-7
MFR.: YQ			SUR.:0.171*1.13m		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 122.36 lm/W		
MODEL		I <sub>max</sub> (cd)	827.7	S/MH(C0/180)	1.22
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2349.4	η UP,DN(C0-180)	1.0,51.6
NOMINAL FLUX(lm)	2349.35	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,46.3
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.3	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

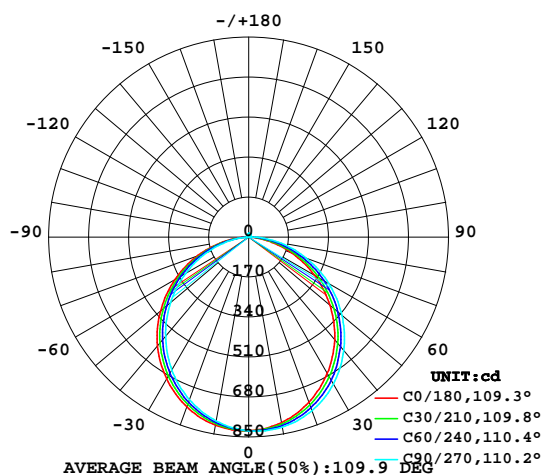

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

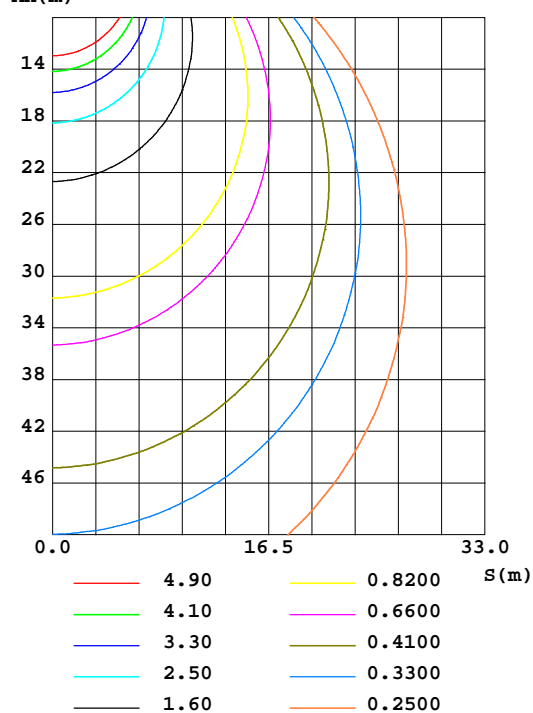


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

# ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum, lamp
10	801.3	810.2	820.9	822.4	812.4	803.0	794.1	791.2	0- 10	77.80	77.80	3.31,3.31
20	747.7	766.1	786.2	789.4	768.2	752.4	736.3	730.2	10- 20	222.0	299.8	12.8,12.8
30	668.8	694.1	721.0	726.7	696.7	676.3	653.6	645.9	20- 30	334.3	634.1	27,27
40	569.8	598.2	629.2	637.3	603.8	578.8	550.1	542.4	30- 40	399.9	1034	44,44
50	451.0	484.3	517.9	528.7	490.0	465.0	434.3	424.1	40- 50	411.7	1446	61.5,61.5
60	322.3	356.8	392.7	402.9	362.8	339.7	310.1	296.9	50- 60	368.8	1814	77.2,77.2
70	191.1	223.0	260.4	269.0	230.4	209.7	184.8	167.8	60- 70	279.8	2094	89.1,89.1
80	67.49	94.61	129.5	135.9	100.5	85.81	68.72	50.37	70- 80	161.6	2256	96,96
90	1.709	3.503	15.62	21.64	5.154	2.783	1.976	2.138	80- 90	45.26	2301	97.9,97.9
100	3.510	3.171	2.795	2.537	2.676	3.245	3.969	3.990	90-100	3.294	2304	98.1,98.1
110	5.774	5.284	4.984	4.508	4.639	5.302	6.388	6.205	100-110	4.513	2309	98.3,98.3
120	8.017	7.457	7.361	6.655	6.790	7.389	8.655	8.248	110-120	6.399	2315	98.6,98.6
130	9.910	9.362	9.518	8.588	8.694	9.174	10.46	9.955	120-130	7.601	2323	98.9,98.9
140	11.34	10.98	11.27	10.21	10.19	10.60	11.83	11.29	130-140	7.866	2331	99.2,99.2
150	12.43	12.38	12.60	11.61	11.44	11.85	12.91	12.47	140-150	7.235	2338	99.5,99.5
160	13.61	13.73	13.71	12.84	12.89	13.19	14.00	13.70	150-160	5.897	2344	99.8,99.8
170	15.06	14.90	14.78	14.15	14.71	14.51	15.05	14.74	160-170	3.965	2348	99.9,99.9
180	16.22	15.55	15.68	15.34	16.22	15.55	15.68	15.33	170-180	1.438	2349	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

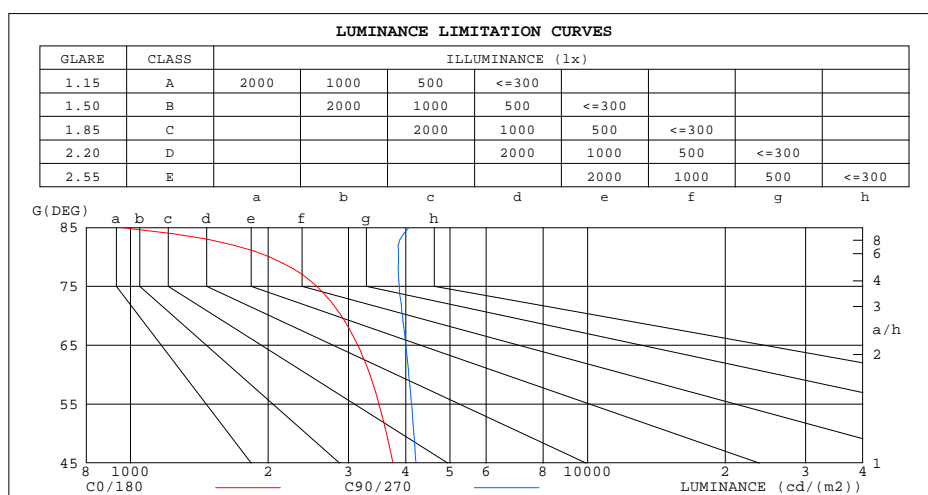

LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	949	4067
80	2013	3860
75	2558	3876
70	2893	3939
65	3142	4003
60	3339	4064
55	3498	4119
50	3634	4169
45	3751	4214


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 26.3DEG  
 Operators: Ethan  
 Test Date: 2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity: 36%  
 Test Distance: 6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

$\rho_{cc}$	80%			70%			50%			30%			10%			0	
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
$\rho_{fc}$	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98	
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82	
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68	
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57	
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49	
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42	
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37	
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26	
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24	

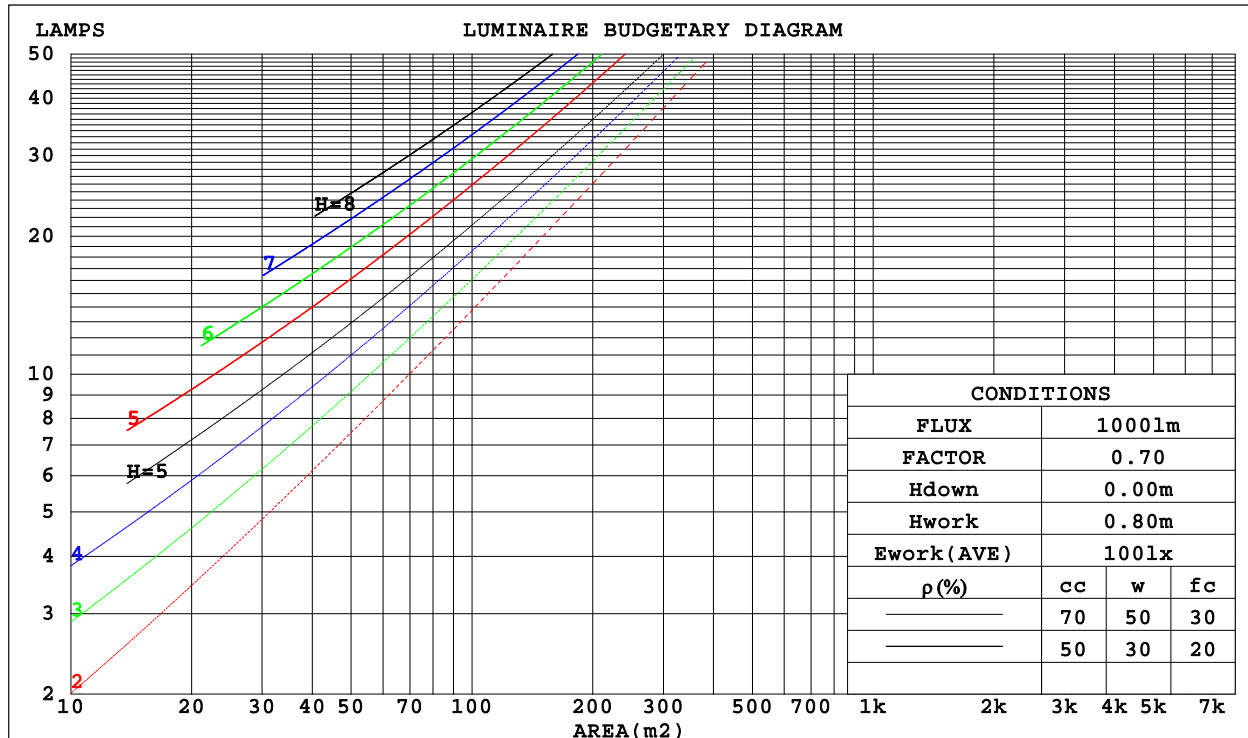

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 26.3DEG  
 Operators: Ethan  
 Test Date: 2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity: 36%  
 Test Distance: 6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## WEC AND CCEC

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients(WEC)												
0.0																
1.0	.309	.176	.056	.301	.172	.055	.287	.165	.053	.273	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.268	.143	.043	.262	.141	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.027	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022		
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017		
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013		
3.0	.180	.130	.090	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011		
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009		
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008		
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007		
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006		
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005		
9.0	.139	.081	.042	.119	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005		
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:26.3DEG  
 Operators:Ethan  
 Test Date:2021-08-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity:36%  
 Test Distance:6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

Uncorrected UGR Table

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:3000K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.1	18.6	17.4	18.8	19.1	17.8	19.3	18.1	19.5	19.8	
	3H	18.5	19.8	18.8	20.1	20.4	19.5	20.9	19.8	21.1	
	4H	19.0	20.3	19.3	20.6	20.9	20.2	21.5	20.6	21.8	
	6H	19.3	20.5	19.6	20.8	21.1	20.8	22.0	21.2	22.4	
	8H	19.3	20.5	19.7	20.8	21.2	21.0	22.2	21.4	22.6	
	12H	19.3	20.4	19.7	20.8	21.1	21.2	22.4	21.6	22.7	
4H	2H	17.8	19.1	18.1	19.4	19.7	18.3	19.6	18.7	19.9	
	3H	19.3	20.5	19.7	20.8	21.2	20.2	21.3	20.6	21.7	
	4H	20.0	21.0	20.4	21.4	21.7	21.0	22.1	21.4	22.4	
	6H	20.4	21.3	20.8	21.7	22.1	21.8	22.7	22.2	23.1	
	8H	20.5	21.3	20.9	21.7	22.2	22.1	22.9	22.5	23.4	
	12H	20.5	21.3	20.9	21.7	22.1	22.3	23.1	22.8	23.6	
8H	4H	20.3	21.1	20.7	21.5	22.0	21.2	22.1	21.7	22.5	
	6H	20.8	21.5	21.3	22.0	22.5	22.1	22.9	22.6	23.3	
	8H	21.0	21.6	21.5	22.1	22.6	22.5	23.2	23.0	23.6	
	12H	21.0	21.6	21.6	22.1	22.6	22.9	23.4	23.4	23.9	
12H	4H	20.3	21.1	20.8	21.5	22.0	21.2	22.0	21.7	22.5	
	6H	20.9	21.6	21.4	22.0	22.5	22.2	22.8	22.7	23.3	
	8H	21.1	21.7	21.6	22.1	22.7	22.6	23.2	23.1	23.6	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 2349 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.0)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:26.3DEG  
 Operators:Ethan  
 Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity:36%  
 Test Distance:6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## UTILIZATION FACTORS TABLE

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:26.3DEG  
 Operators:Ethan  
 Test Date:2021-08-16

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity:36%  
 Test Distance:6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## ISOCANDELA DIAGRAM

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

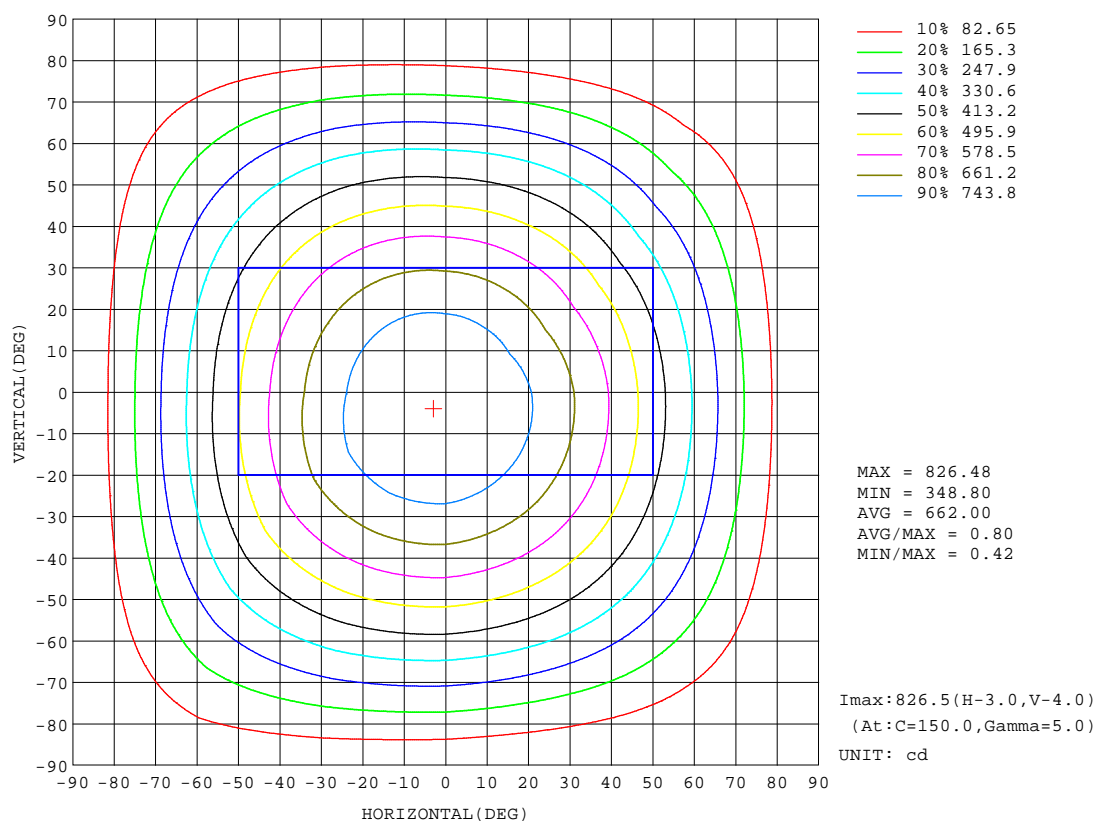


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## AAI Figure

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:1639 lm

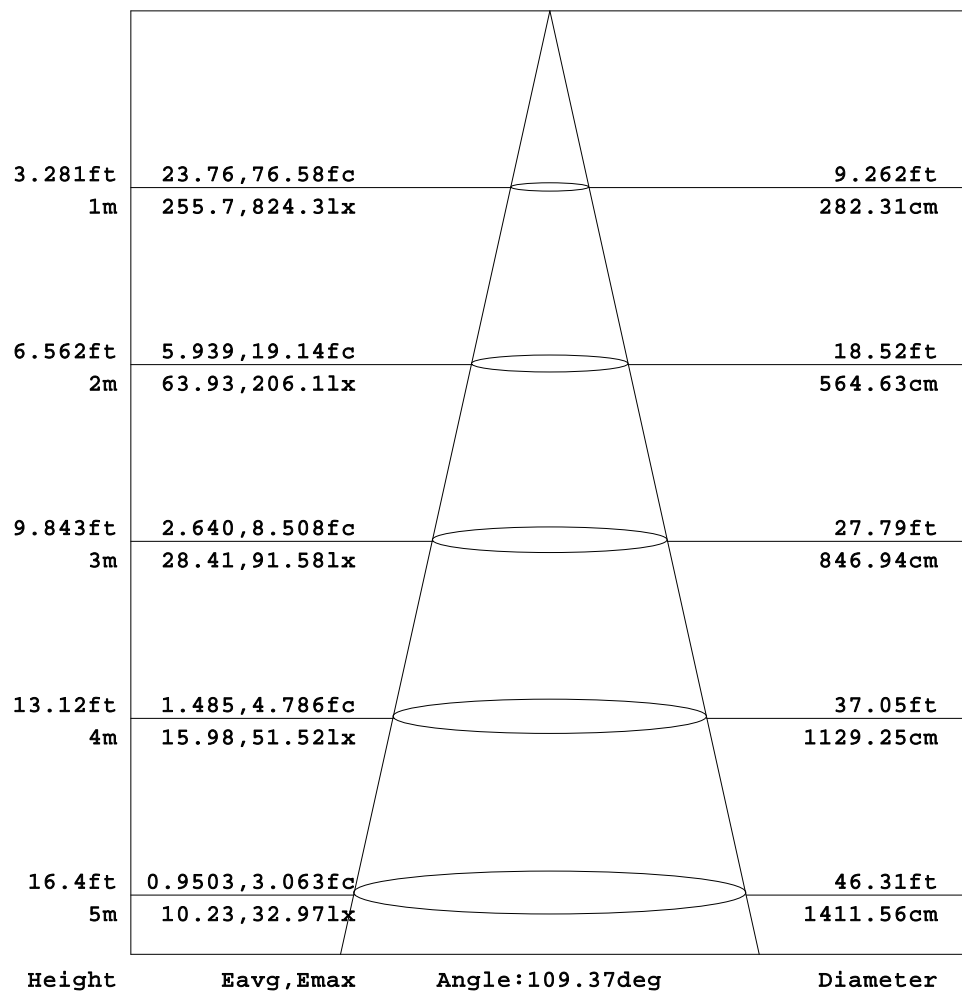

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 26.3DEG  
Operators: Ethan  
Test Date: 2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity: 36%  
Test Distance: 6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10



## ISOLUX DIAGRAM


Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

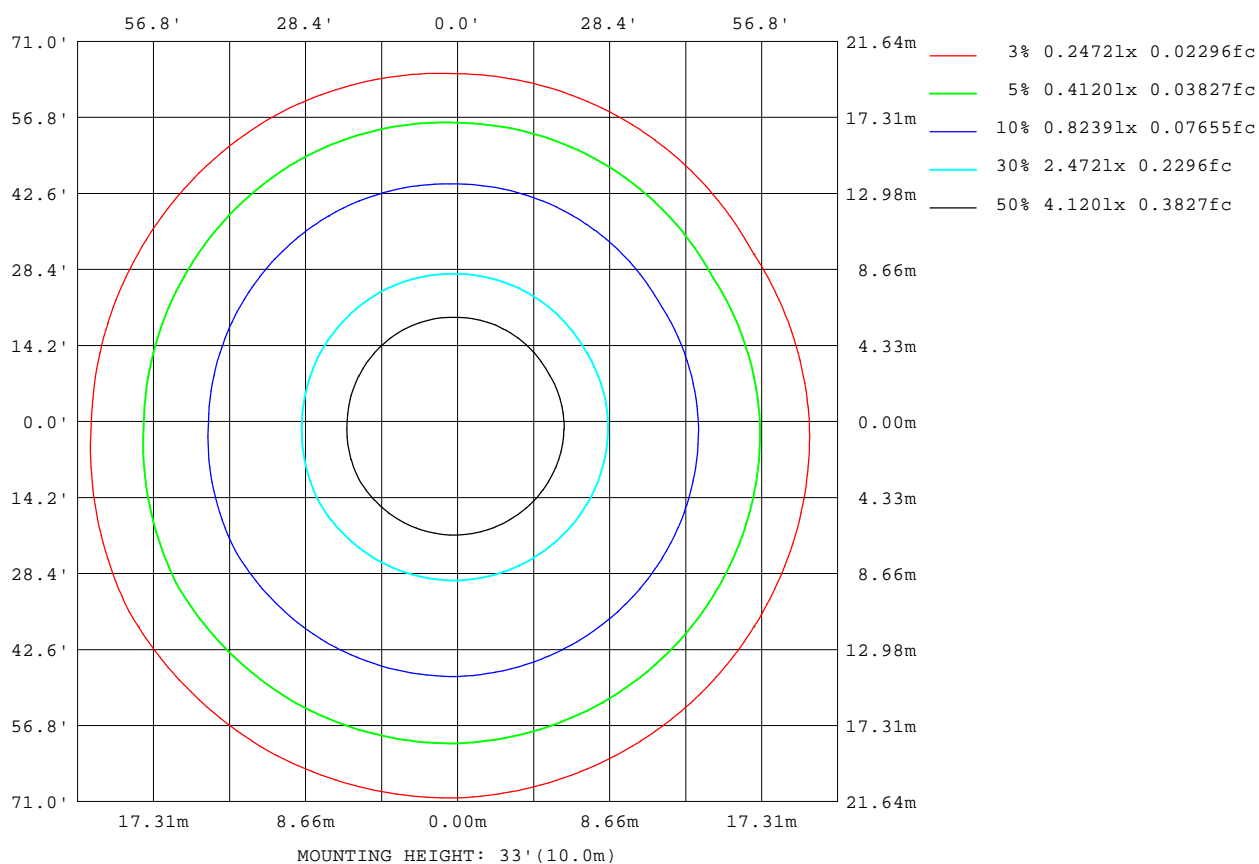

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## Planar Illuminance Curve

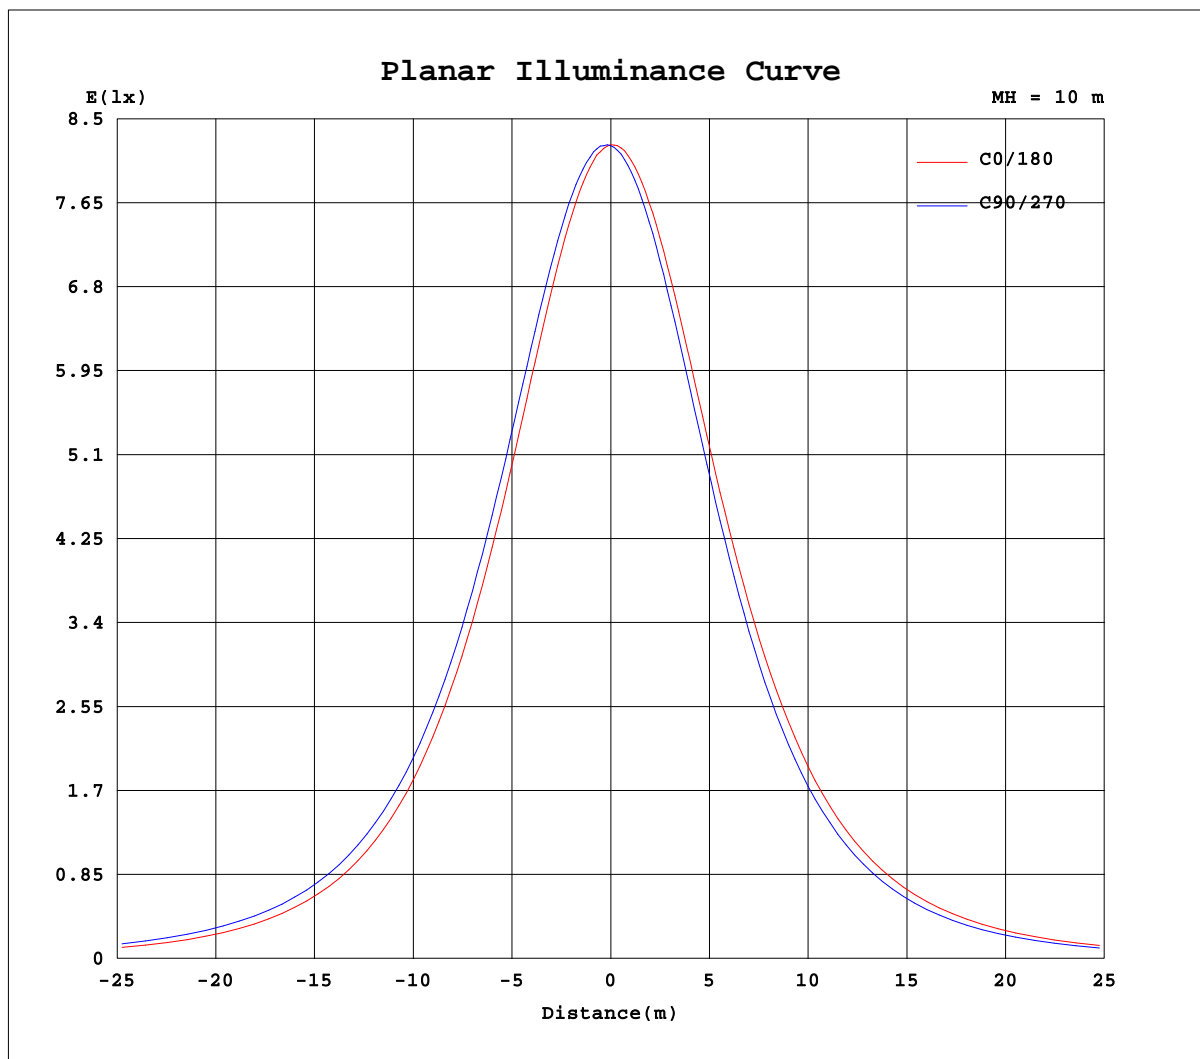

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 26.3DEG  
Operators: Ethan  
Test Date: 2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity: 36%  
Test Distance: 6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊 A+ 13S5P/13S10P  
E款 0:10

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.3V I:0.1630A P:19.20W PF:0.9890 Lamp Flux:2349.35x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	823	823	823	823	823	823	823	823	823	823	823	823						
5	816	819	822	826	827	828	822	819	816	813	811	811						
10	801	807	813	821	822	822	812	806	800	794	791	791						
15	778	788	797	807	810	809	794	786	777	769	764	763						
20	748	760	773	786	790	789	768	758	747	736	731	730						
25	711	725	741	757	762	761	736	723	711	698	691	689						
30	669	685	703	721	727	726	697	683	669	654	647	645						
35	621	639	657	678	685	685	653	637	622	604	597	595						
40	570	589	607	629	637	638	604	587	570	550	543	542						
45	512	534	553	576	584	587	550	533	515	494	486	484						
50	451	474	495	518	527	530	490	474	456	434	427	422						
55	387	410	434	457	466	468	428	411	396	373	365	357						
60	322	344	370	393	403	403	363	346	333	310	302	292						
65	256	277	303	327	337	336	297	281	268	247	237	226						
70	191	211	235	260	269	269	230	215	204	185	174	162						
75	128	146	168	194	202	201	165	151	141	125	112	101						
80	67.5	83.6	106	130	136	136	101	90.0	81.6	68.7	55.8	44.9						
85	16.0	28.4	49.3	68.5	74.7	73.8	42.8	34.5	29.8	18.9	9.94	4.79						
90	1.71	2.33	4.67	15.6	23.9	19.4	5.15	3.77	1.79	1.98	2.18	2.10						
95	2.53	2.35	2.20	1.92	1.84	1.69	1.85	2.17	2.55	2.89	3.03	2.96						
100	3.51	3.27	3.07	2.79	2.60	2.47	2.68	3.02	3.47	3.97	4.04	3.94						
105	4.60	4.30	4.07	3.84	3.55	3.40	3.62	3.98	4.49	5.14	5.12	5.03						
110	5.77	5.41	5.16	4.98	4.59	4.42	4.64	5.03	5.57	6.39	6.24	6.17						
115	6.92	6.53	6.25	6.18	5.65	5.51	5.73	6.13	6.62	7.59	7.30	7.24						
120	8.02	7.59	7.33	7.36	6.72	6.59	6.79	7.18	7.60	8.66	8.28	8.21						
125	9.01	8.56	8.30	8.48	7.71	7.60	7.80	8.15	8.53	9.60	9.20	9.12						
130	9.91	9.47	9.26	9.52	8.63	8.54	8.69	8.98	9.37	10.5	10.0	9.89						
135	10.7	10.3	10.1	10.5	9.50	9.39	9.49	9.72	10.1	11.2	10.8	10.6						
140	11.3	11.0	10.9	11.3	10.3	10.1	10.2	10.4	10.8	11.8	11.4	11.1						
145	11.9	11.7	11.7	12.0	11.1	10.8	10.8	11.0	11.5	12.4	12.0	11.7						
150	12.4	12.3	12.4	12.6	11.8	11.4	11.4	11.6	12.1	12.9	12.6	12.4						
155	12.9	13.0	13.1	13.1	12.5	11.9	12.1	12.2	12.8	13.4	13.1	13.1						
160	13.6	13.8	13.7	13.7	13.1	12.6	12.9	12.9	13.5	14.0	13.7	13.7						
165	14.3	14.5	14.2	14.3	13.8	13.2	13.8	13.6	14.1	14.5	14.1	14.3						
170	15.1	15.1	14.7	14.8	14.4	13.9	14.7	14.3	14.7	15.0	14.6	14.9						
175	15.9	15.5	15.1	15.3	15.0	14.6	15.6	15.1	15.2	15.5	15.1	15.2						
180	16.2	15.6	15.5	15.7	15.4	15.3	16.2	15.6	15.5	15.7	15.4	15.3						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10