


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.87 lm/W			
MODEL		I _{max} (cd)	1081	S/MH(C0/180)	1.22
NOMINAL POWER(W)	26	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3068.6	η UP,DN(C0-180)	1.0,51.6
NOMINAL FLUX(lm)	3068.62	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,46.3
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.3	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

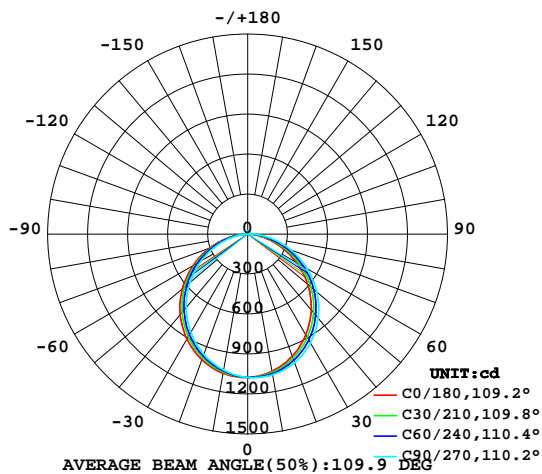

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

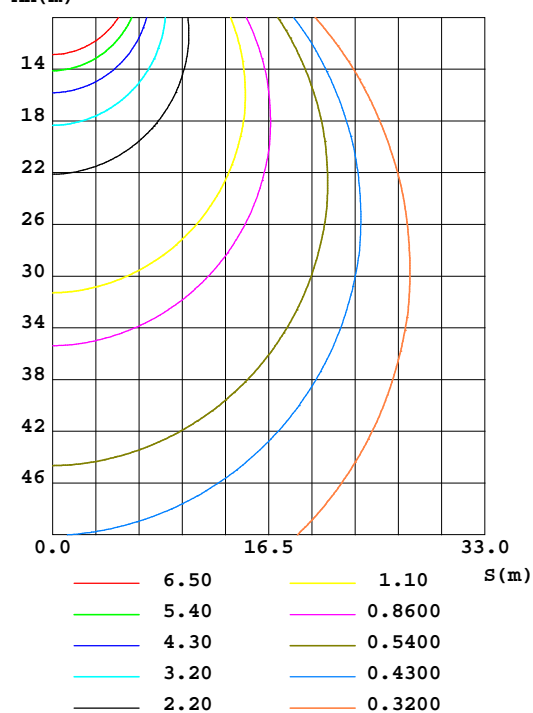


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1046	1059	1072	1075	1060	1049	1037	1033	0- 10	101.6	101.6	3.31,3.31
20	976.3	1000	1027	1030	1004	982.1	961.2	953.9	10- 20	289.9	391.5	12.8,12.8
30	873.3	906.7	942.3	948.7	910.6	882.2	853.1	843.5	20- 30	436.6	828.1	27,27
40	744.6	782.4	822.9	832.7	789.0	754.9	718.0	708.7	30- 40	522.4	1350	44,44
50	588.6	633.4	678.2	690.8	640.3	607.0	566.5	554.1	40- 50	537.7	1888	61.5,61.5
60	420.5	466.8	514.3	526.1	473.9	443.2	404.6	387.7	50- 60	481.7	2370	77.2,77.2
70	249.1	291.5	341.1	351.5	300.8	273.1	240.7	219.4	60- 70	365.5	2735	89.1,89.1
80	87.75	124.0	170.4	177.4	133.3	111.5	89.10	65.87	70- 80	211.1	2946	96,96
90	2.230	4.537	21.08	28.21	6.735	3.553	2.596	2.791	80- 90	59.17	3006	97.9,97.9
100	4.589	4.125	3.635	3.318	3.488	4.250	5.220	5.221	90-100	4.307	3010	98.1,98.1
110	7.538	6.888	6.488	5.884	6.056	6.937	8.373	8.106	100-110	5.895	3016	98.3,98.3
120	10.49	9.727	9.594	8.681	8.862	9.660	11.32	10.77	110-120	8.357	3024	98.6,98.6
130	12.97	12.21	12.42	11.22	11.34	11.99	13.68	13.01	120-130	9.929	3034	98.9,98.9
140	14.82	14.31	14.71	13.35	13.31	13.85	15.47	14.75	130-140	10.27	3044	99.2,99.2
150	16.23	16.15	16.44	15.17	14.95	15.49	16.85	16.29	140-150	9.451	3054	99.5,99.5
160	17.77	17.92	17.91	16.79	16.87	17.22	18.30	17.89	150-160	7.704	3062	99.8,99.8
170	19.67	19.46	19.29	18.48	19.25	18.95	19.66	19.25	160-170	5.180	3067	99.9,99.9
180	21.21	20.32	20.48	20.03	21.22	20.32	20.48	20.02	170-180	1.879	3069	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

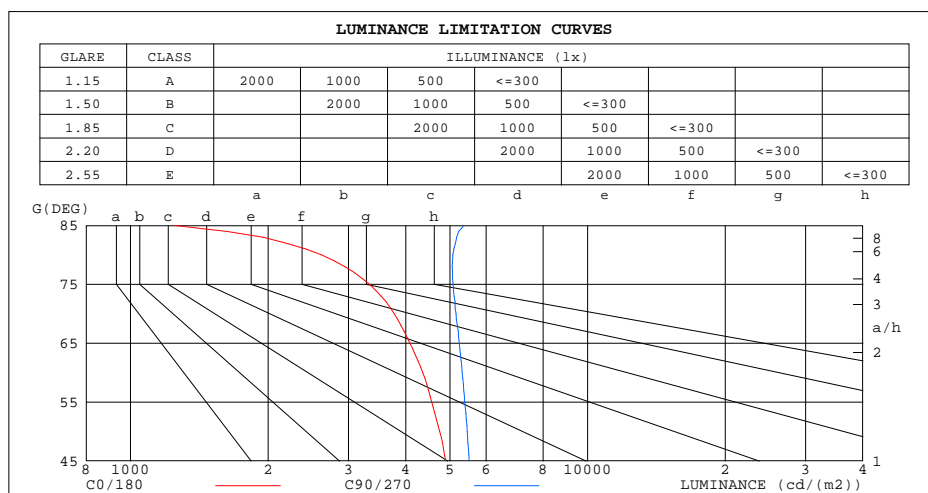


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

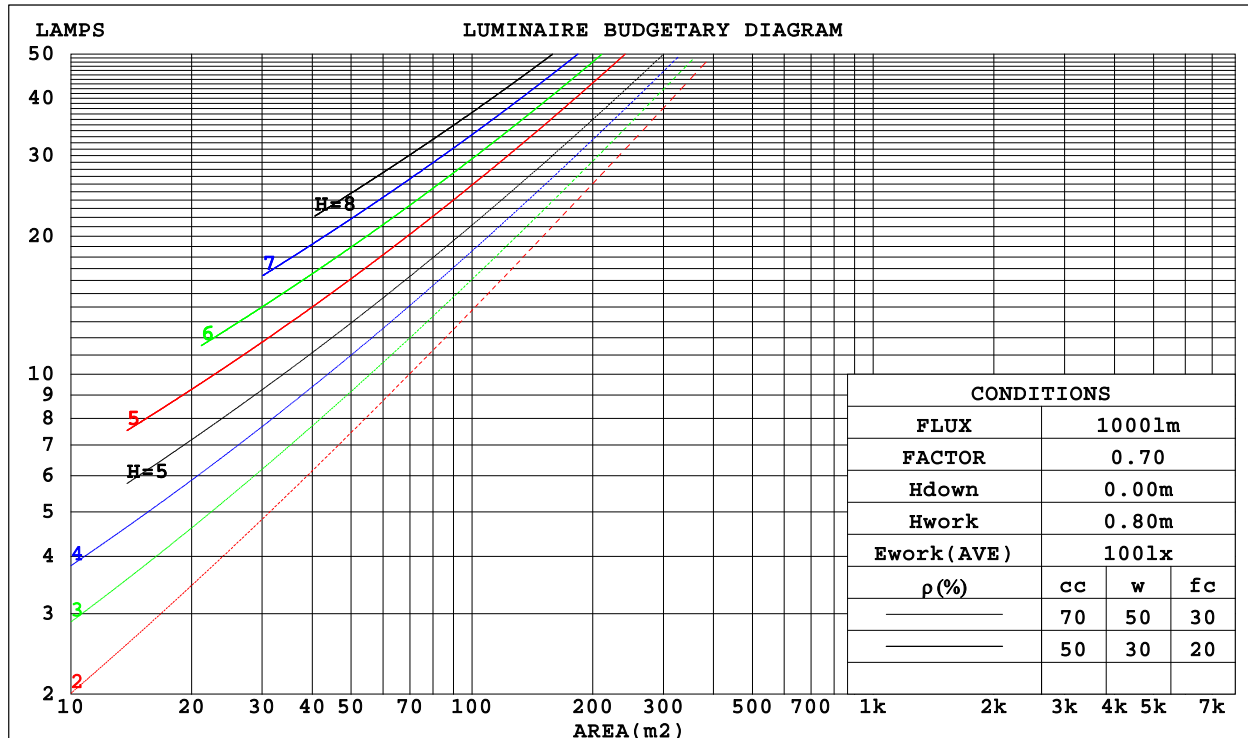

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

WEC AND CCEC

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.301	.172	.055	.287	.165	.053	.274	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.269	.143	.043	.262	.141	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.027	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.090	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.139	.081	.042	.119	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

Uncorrected UGR Table

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:3000K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.0	19.5	18.3	19.8	20.0	18.7	20.2	19.0	20.5	20.7	
	3H	19.4	20.8	19.7	21.0	21.3	20.4	21.8	20.8	22.1	22.3
	4H	19.9	21.2	20.2	21.5	21.8	21.2	22.5	21.5	22.7	23.0
	6H	20.2	21.4	20.6	21.7	22.1	21.8	23.0	22.1	23.3	23.6
	8H	20.2	21.4	20.6	21.8	22.1	22.0	23.2	22.4	23.5	23.8
	12H	20.2	21.4	20.6	21.7	22.1	22.2	23.3	22.6	23.7	24.0
4H	2H	18.7	20.0	19.1	20.3	20.6	19.3	20.6	19.6	20.9	21.2
	3H	20.3	21.4	20.7	21.7	22.1	21.1	22.3	21.5	22.6	22.9
	4H	20.9	21.9	21.3	22.3	22.7	22.0	23.0	22.4	23.4	23.8
	6H	21.3	22.2	21.7	22.6	23.0	22.7	23.6	23.2	24.0	24.4
	8H	21.4	22.3	21.8	22.7	23.1	23.0	23.9	23.5	24.3	24.7
	12H	21.4	22.2	21.9	22.6	23.1	23.3	24.1	23.7	24.5	25.0
8H	4H	21.2	22.1	21.7	22.5	22.9	22.2	23.0	22.6	23.4	23.9
	6H	21.8	22.5	22.3	22.9	23.4	23.1	23.8	23.5	24.2	24.7
	8H	21.9	22.6	22.4	23.0	23.5	23.5	24.1	24.0	24.6	25.1
	12H	22.0	22.5	22.5	23.0	23.5	23.8	24.4	24.4	24.9	25.4
12H	4H	21.3	22.0	21.7	22.5	22.9	22.2	23.0	22.6	23.4	23.8
	6H	21.9	22.5	22.4	23.0	23.5	23.1	23.7	23.6	24.2	24.7
	8H	22.1	22.6	22.6	23.1	23.6	23.6	24.1	24.1	24.6	25.1
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3069 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.9)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

UTILIZATION FACTORS TABLE

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ISOCANDELA DIAGRAM

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

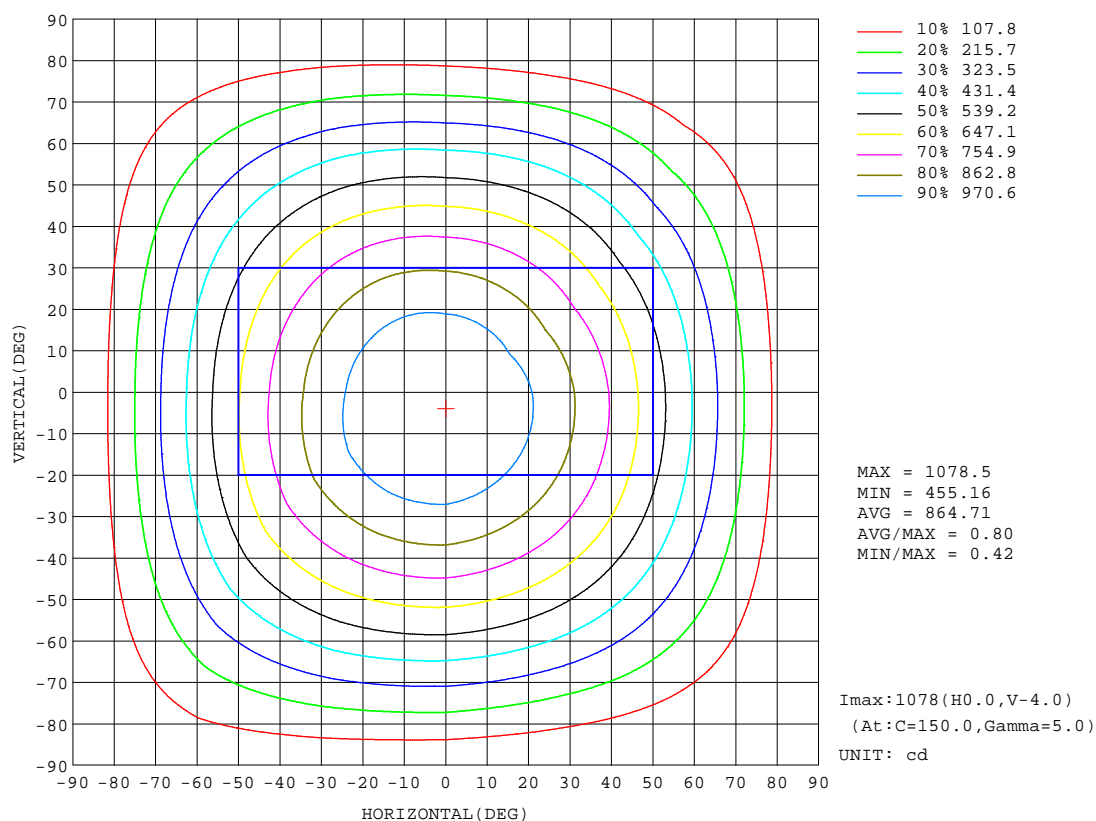


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

AAI Figure

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:2140 lm

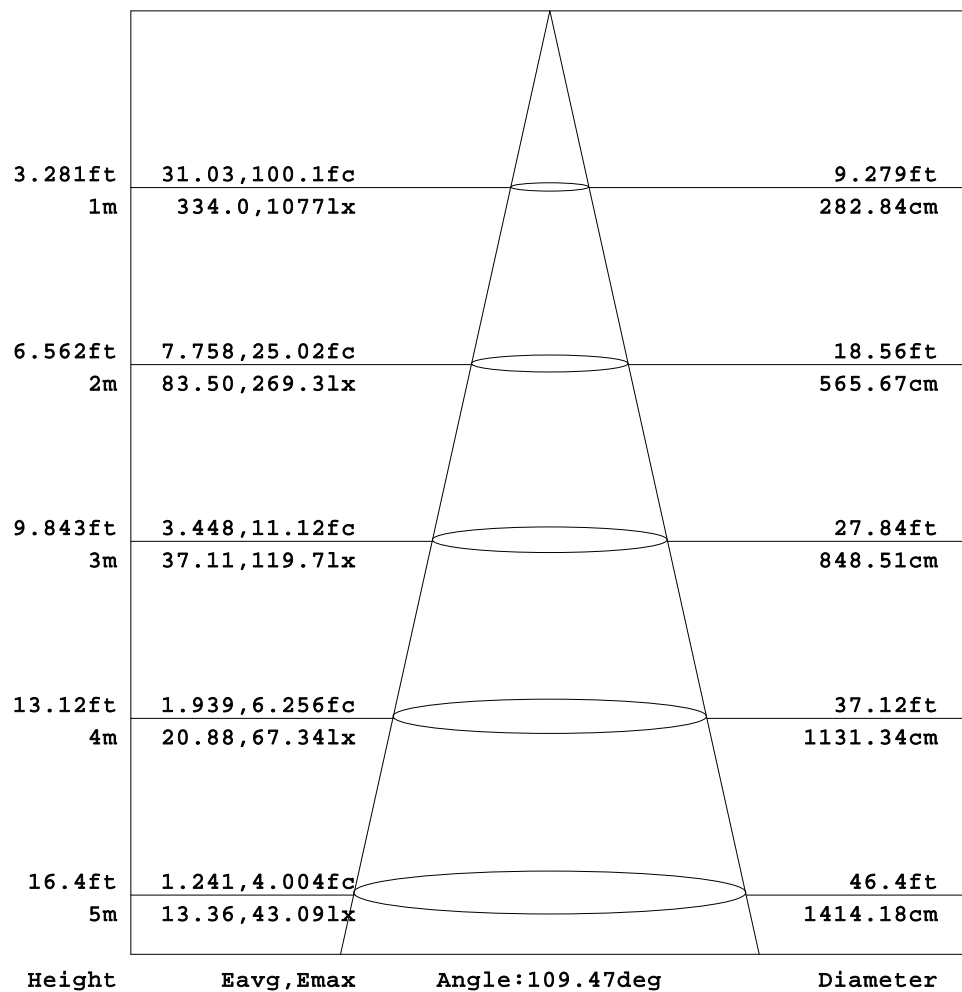


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

ISOLUX DIAGRAM


Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

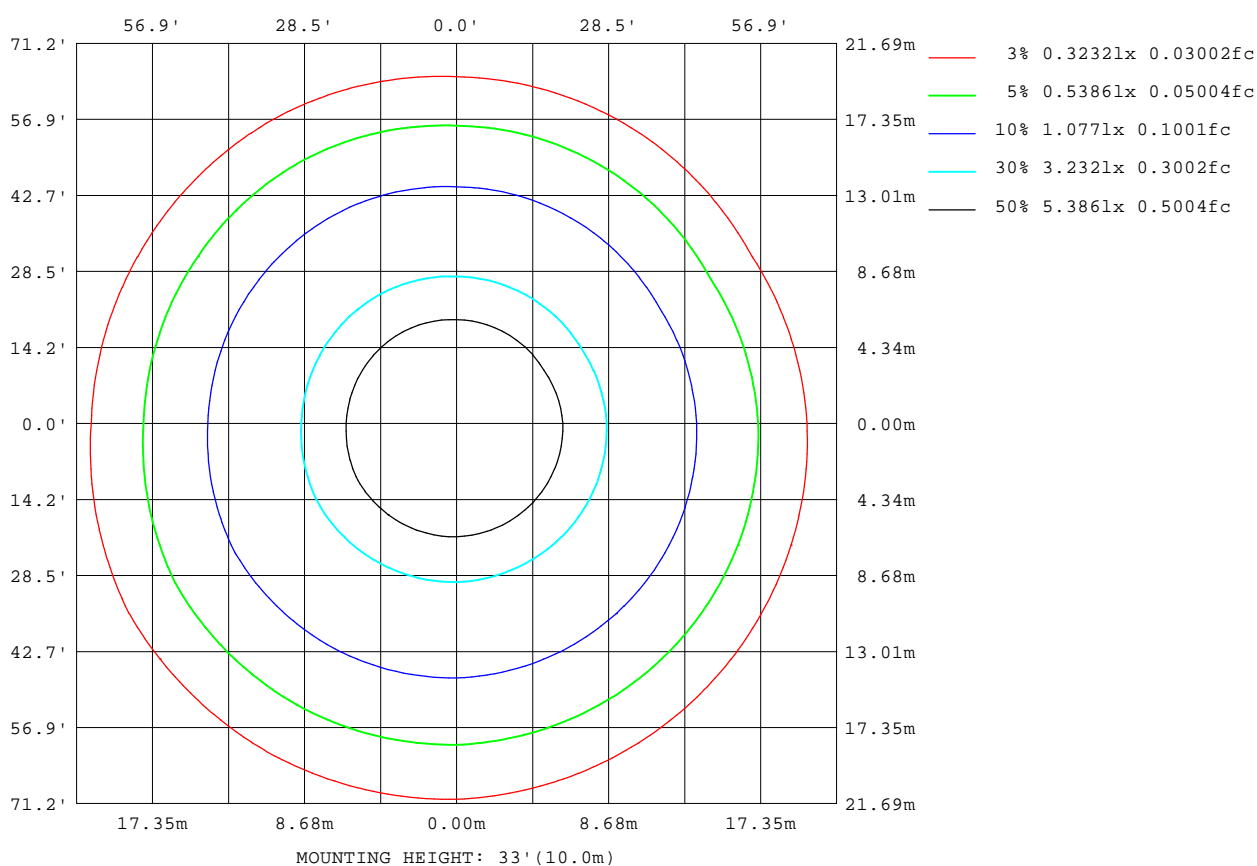

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

Planar Illuminance Curve

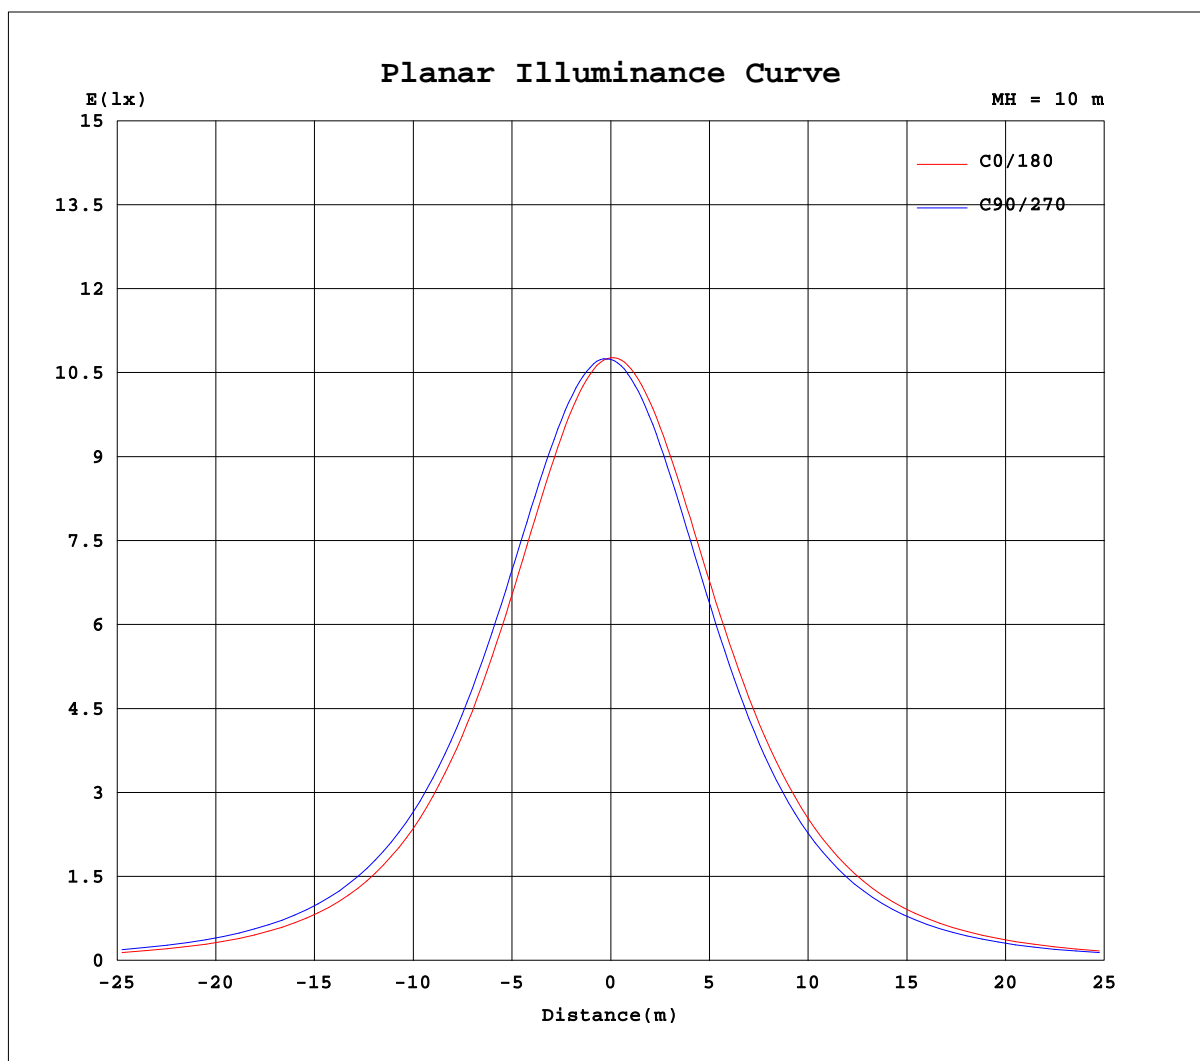

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.2V I:0.2160A P:25.60W PF:0.9930 Lamp Flux:3068.62x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075						
5	1066	1070	1074	1079	1080	1081	1074	1069	1065	1061	1059	1060						
10	1046	1054	1063	1072	1074	1075	1060	1053	1045	1037	1033	1033						
15	1016	1028	1041	1055	1058	1058	1037	1025	1015	1003	998	997						
20	976	992	1009	1027	1031	1030	1004	989	975	961	955	953						
25	929	948	968	990	994	994	961	943	928	911	903	901						
30	873	895	918	942	950	948	911	891	874	853	845	842						
35	811	836	860	886	893	895	853	831	812	788	780	777						
40	745	770	795	823	832	834	789	766	744	718	710	707						
45	668	699	723	754	762	766	718	695	672	644	636	632						
50	589	619	648	678	689	693	640	619	596	566	558	551						
55	505	536	567	598	609	612	558	536	516	486	477	467						
60	420	450	484	514	526	527	474	452	435	405	395	381						
65	333	363	396	428	441	440	388	366	350	322	310	296						
70	249	276	307	341	352	351	301	280	266	241	227	211						
75	166	192	219	254	263	263	215	196	184	162	148	131						
80	87.7	111	137	170	177	178	133	117	106	89.1	72.9	58.8						
85	21.0	37.7	63.8	90.4	97.4	96.6	55.7	44.4	38.5	24.0	13.3	6.25						
90	2.23	3.24	5.83	21.1	31.0	25.4	6.74	4.76	2.35	2.60	2.84	2.75						
95	3.31	3.06	2.87	2.49	2.40	2.21	2.41	2.84	3.34	3.80	3.95	3.87						
100	4.59	4.25	3.99	3.63	3.41	3.23	3.49	3.96	4.54	5.22	5.27	5.17						
105	6.01	5.61	5.30	4.99	4.64	4.44	4.72	5.21	5.88	6.75	6.70	6.58						
110	7.54	7.05	6.72	6.49	5.99	5.78	6.06	6.58	7.29	8.37	8.15	8.06						
115	9.05	8.52	8.15	8.04	7.39	7.20	7.47	8.00	8.65	9.93	9.55	9.46						
120	10.5	9.90	9.56	9.59	8.76	8.61	8.86	9.38	9.94	11.3	10.8	10.7						
125	11.8	11.2	10.8	11.1	10.1	9.93	10.2	10.7	11.2	12.6	12.0	11.9						
130	13.0	12.4	12.1	12.4	11.3	11.2	11.3	11.7	12.2	13.7	13.1	12.9						
135	14.0	13.4	13.2	13.6	12.4	12.3	12.4	12.7	13.2	14.7	14.1	13.8						
140	14.8	14.4	14.3	14.7	13.5	13.2	13.3	13.6	14.1	15.5	15.0	14.5						
145	15.6	15.3	15.3	15.6	14.5	14.1	14.1	14.3	15.0	16.2	15.7	15.3						
150	16.2	16.1	16.2	16.4	15.4	14.9	15.0	15.1	15.9	16.8	16.4	16.1						
155	16.9	17.0	17.0	17.2	16.3	15.6	15.8	15.9	16.7	17.5	17.1	17.1						
160	17.8	18.0	17.9	17.9	17.2	16.4	16.9	16.8	17.6	18.3	17.8	17.9						
165	18.7	18.9	18.6	18.6	18.0	17.3	18.0	17.7	18.4	19.0	18.4	18.7						
170	19.7	19.7	19.2	19.3	18.8	18.1	19.2	18.7	19.2	19.7	19.1	19.4						
175	20.7	20.3	19.8	20.0	19.6	19.1	20.5	19.8	19.9	20.2	19.8	19.9						
180	21.2	20.4	20.2	20.5	20.1	20.0	21.2	20.4	20.2	20.5	20.1	19.9						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10