


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm					
NAME: 二代线条灯			TYPE:下发光 白色外壳		WEIGHT:
DIM.: 2FT			SPEC.:3000K		SERIAL No.:YQ2107-7
MFR.: YQ			SUR.:0.171*1.13m		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 117.49 lm/W		
MODEL		I _{max} (cd)	1300	S/MH(C0/180)	1.21
NOMINAL POWER(W)	32	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3689.0	η UP,DN(C0-180)	1.0,50.2
NOMINAL FLUX(lm)	3689.04	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,47.7
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.2	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

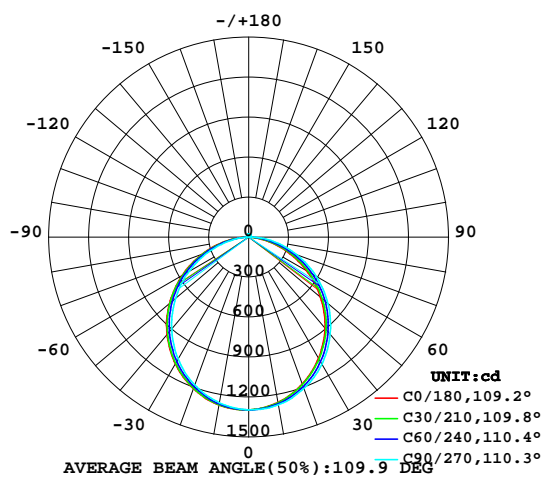

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

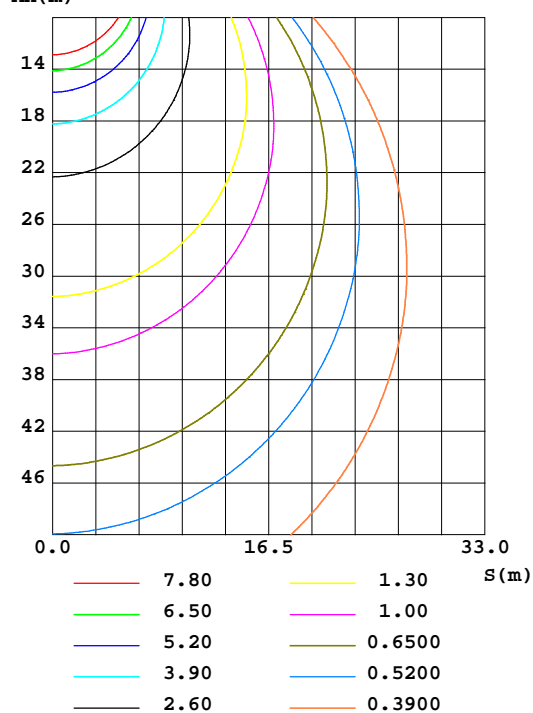


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1260	1267	1278	1287	1280	1274	1263	1253	0- 10	122.5	122.5	3.32,3.32
20	1175	1187	1210	1227	1211	1201	1182	1162	10- 20	349.2	471.7	12.8,12.8
30	1049	1068	1101	1123	1099	1087	1059	1033	20- 30	525.5	997.2	27,27
40	892.3	914.8	952.0	981.0	954.0	937.0	899.5	871.3	30- 40	628.6	1626	44.1,44.1
50	704.3	734.8	776.6	810.3	776.4	759.4	716.8	683.7	40- 50	646.8	2273	61.6,61.6
60	498.7	535.2	583.6	615.8	577.2	560.5	515.5	479.9	50- 60	579.2	2852	77.3,77.3
70	292.4	328.5	382.3	409.0	369.5	350.8	312.1	272.9	60- 70	438.4	3290	89.2,89.2
80	99.49	133.5	186.4	204.8	167.4	151.4	120.8	83.72	70- 80	252.9	3543	96,96
90	2.777	4.065	17.54	31.56	8.517	5.821	2.774	3.147	80- 90	70.22	3613	97.9,97.9
100	5.661	5.458	4.892	4.260	4.125	4.678	5.647	5.913	90-100	5.043	3618	98.1,98.1
110	9.154	8.869	8.526	7.423	7.164	7.750	9.191	9.227	100-110	7.062	3626	98.3,98.3
120	12.66	12.32	12.40	10.86	10.47	10.95	12.78	12.47	110-120	10.01	3636	98.5,98.5
130	15.56	15.25	15.73	13.91	13.41	13.79	15.76	15.26	120-130	11.92	3647	98.9,98.9
140	17.75	17.69	18.37	16.49	15.77	16.17	18.10	17.55	130-140	12.36	3660	99.2,99.2
150	19.39	19.81	20.28	18.69	17.75	18.26	19.95	19.63	140-150	11.40	3671	99.5,99.5
160	21.15	21.79	21.90	20.65	20.19	20.44	21.92	21.70	150-160	9.304	3681	99.8,99.8
170	23.43	23.49	23.52	22.73	23.16	22.66	23.66	23.46	160-170	6.264	3687	99.9,99.9
180	25.45	24.48	24.89	24.49	25.45	24.48	24.90	24.47	170-180	2.274	3689	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

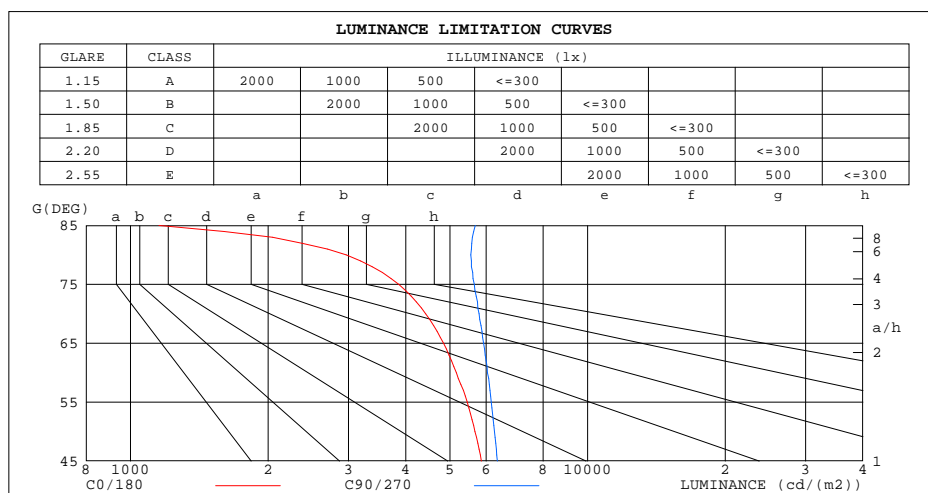

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1155	5677
80	2966	5557
75	3863	5655
70	4425	5788
65	4841	5921
60	5163	6043
55	5452	6157
50	5671	6256
45	5859	6351


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

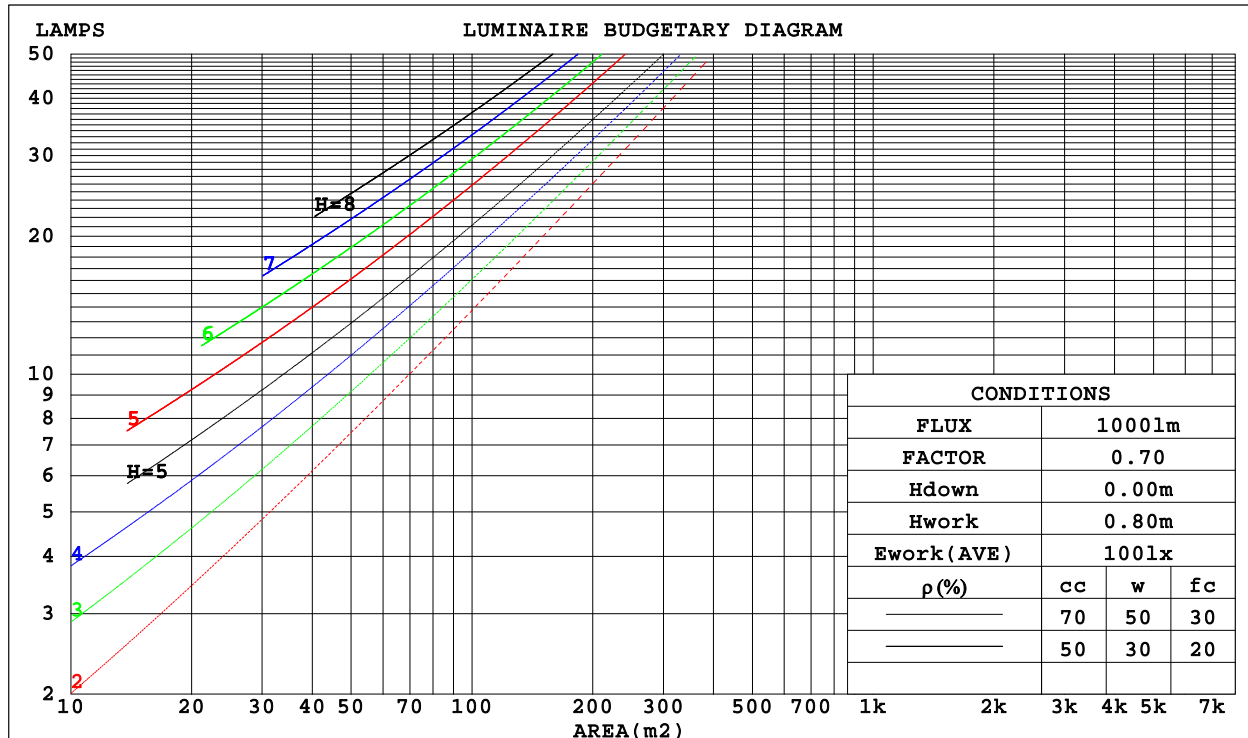

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

WEC AND CCEC

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.056	.301	.172	.054	.286	.164	.052	.273	.157	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044	
3.0	.268	.143	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.185	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.079	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.101	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.090	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.172	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.139	.081	.042	.119	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

Uncorrected UGR Table

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:3000K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.5	20.0	18.8	20.2	20.5	19.1	20.5	19.4	20.8	21.0	
	3H	19.8	21.2	20.2	21.5	21.7	20.7	22.1	21.0	22.3	22.6
	4H	20.3	21.6	20.7	21.9	22.2	21.4	22.7	21.7	23.0	23.3
	6H	20.6	21.8	20.9	22.1	22.4	21.9	23.2	22.3	23.5	23.8
	8H	20.6	21.8	21.0	22.1	22.5	22.2	23.4	22.5	23.7	24.0
	12H	20.6	21.7	21.0	22.1	22.4	22.3	23.5	22.7	23.8	24.2
4H	2H	19.1	20.4	19.5	20.7	21.0	19.6	20.9	19.9	21.2	21.5
	3H	20.6	21.8	21.0	22.1	22.5	21.4	22.5	21.8	22.8	23.2
	4H	21.2	22.3	21.6	22.6	23.0	22.2	23.2	22.6	23.6	24.0
	6H	21.6	22.5	22.1	22.9	23.3	22.9	23.8	23.3	24.2	24.6
	8H	21.7	22.6	22.1	23.0	23.4	23.2	24.0	23.6	24.4	24.9
	12H	21.7	22.5	22.2	22.9	23.4	23.4	24.2	23.9	24.6	25.1
8H	4H	21.5	22.4	22.0	22.8	23.2	22.4	23.2	22.8	23.7	24.1
	6H	22.0	22.8	22.5	23.2	23.7	23.2	23.9	23.7	24.4	24.9
	8H	22.2	22.8	22.7	23.3	23.8	23.6	24.2	24.1	24.7	25.2
	12H	22.2	22.7	22.7	23.2	23.7	23.9	24.5	24.4	24.9	25.5
12H	4H	21.6	22.3	22.0	22.8	23.2	22.4	23.2	22.8	23.6	24.0
	6H	22.1	22.7	22.6	23.2	23.7	23.3	23.9	23.7	24.4	24.8
	8H	22.3	22.8	22.8	23.3	23.8	23.7	24.2	24.2	24.7	25.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3689 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

UTILIZATION FACTORS TABLE

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	94	86	79	92	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ISOCANDELA DIAGRAM

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

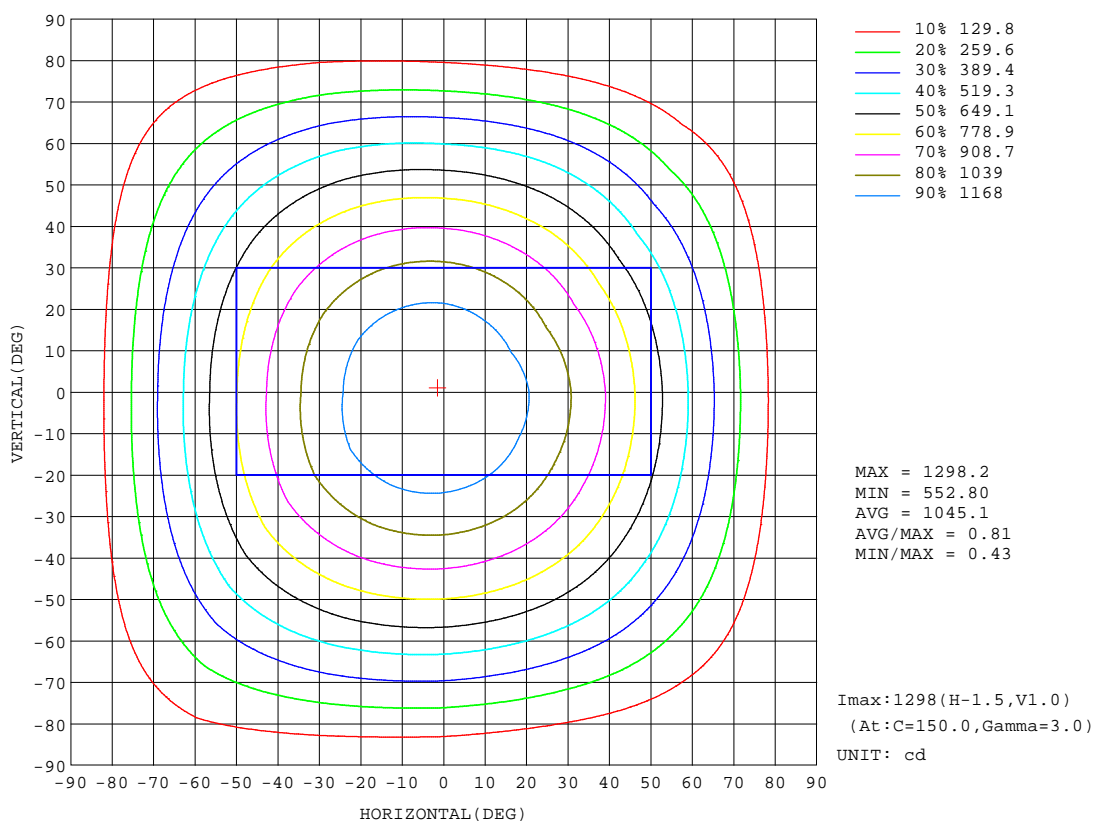


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

AAI Figure

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:2576 lm

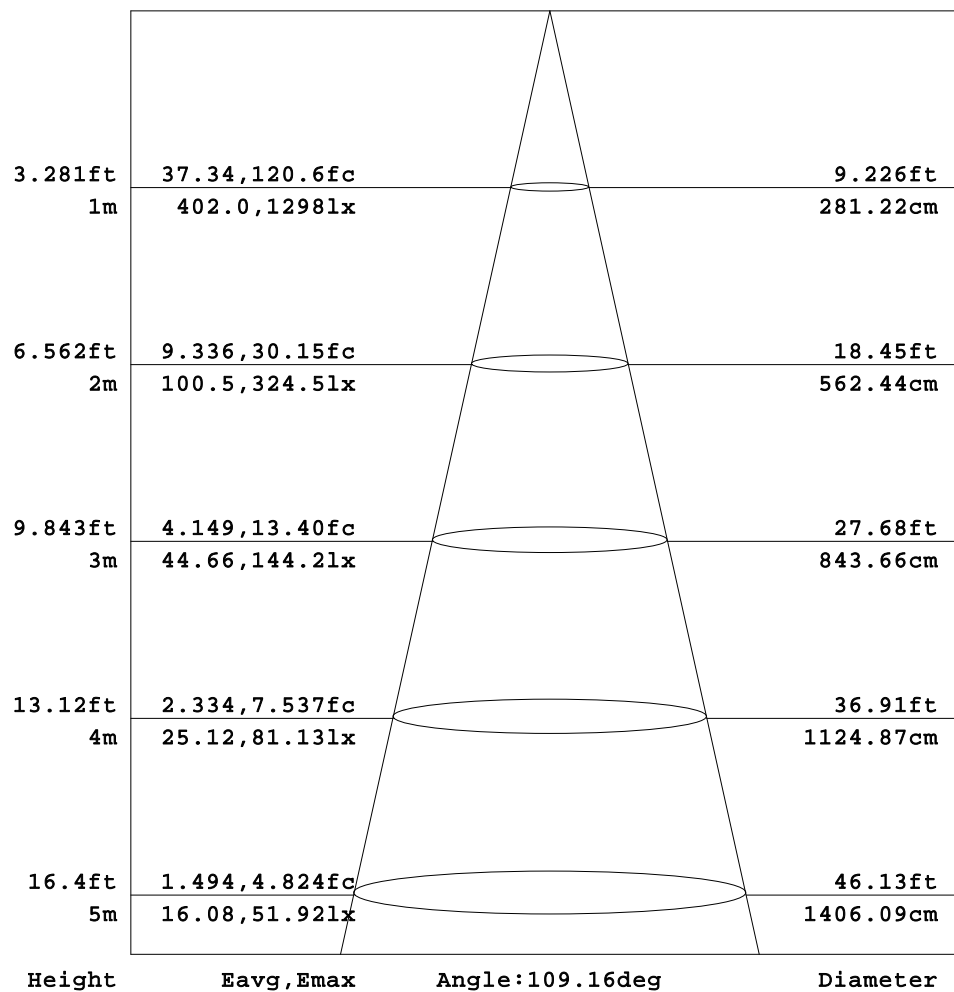


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

ISOLUX DIAGRAM


Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

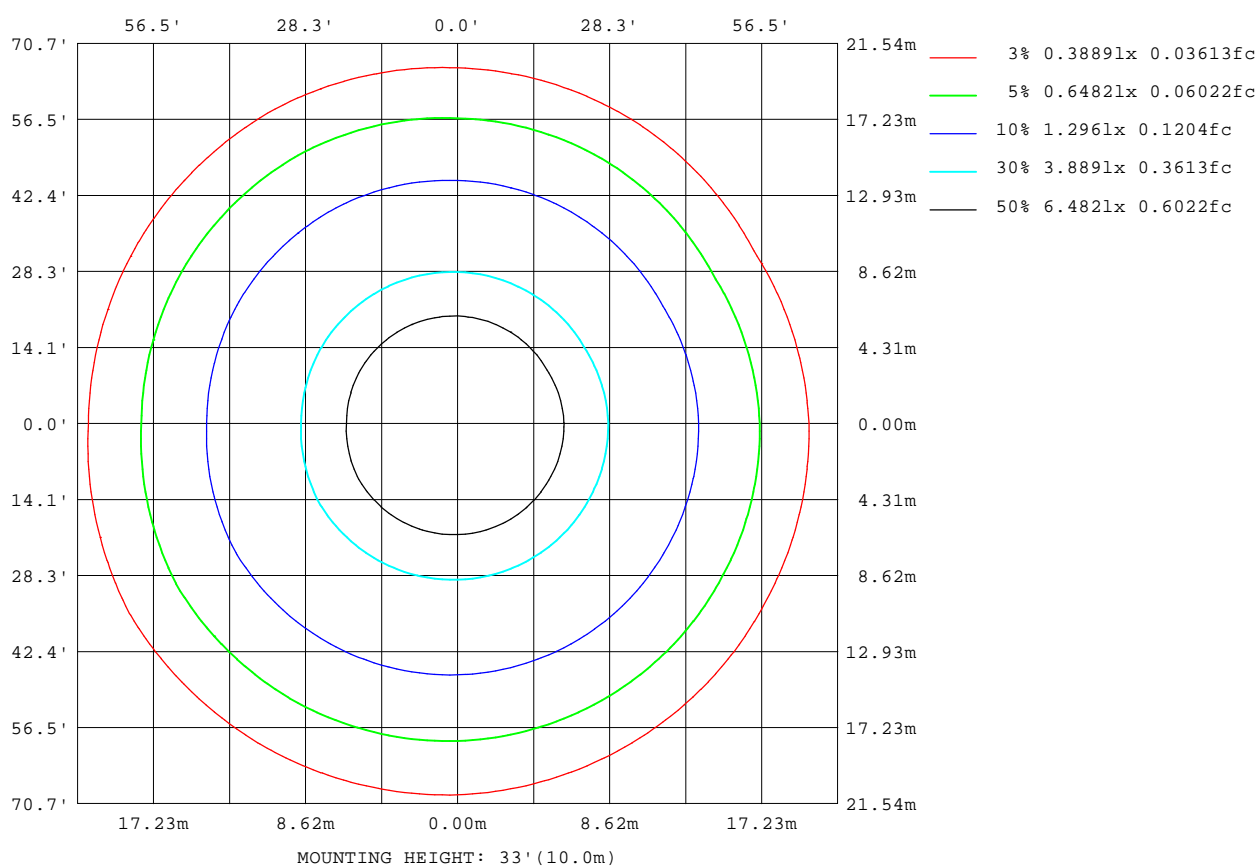

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

Planar Illuminance Curve

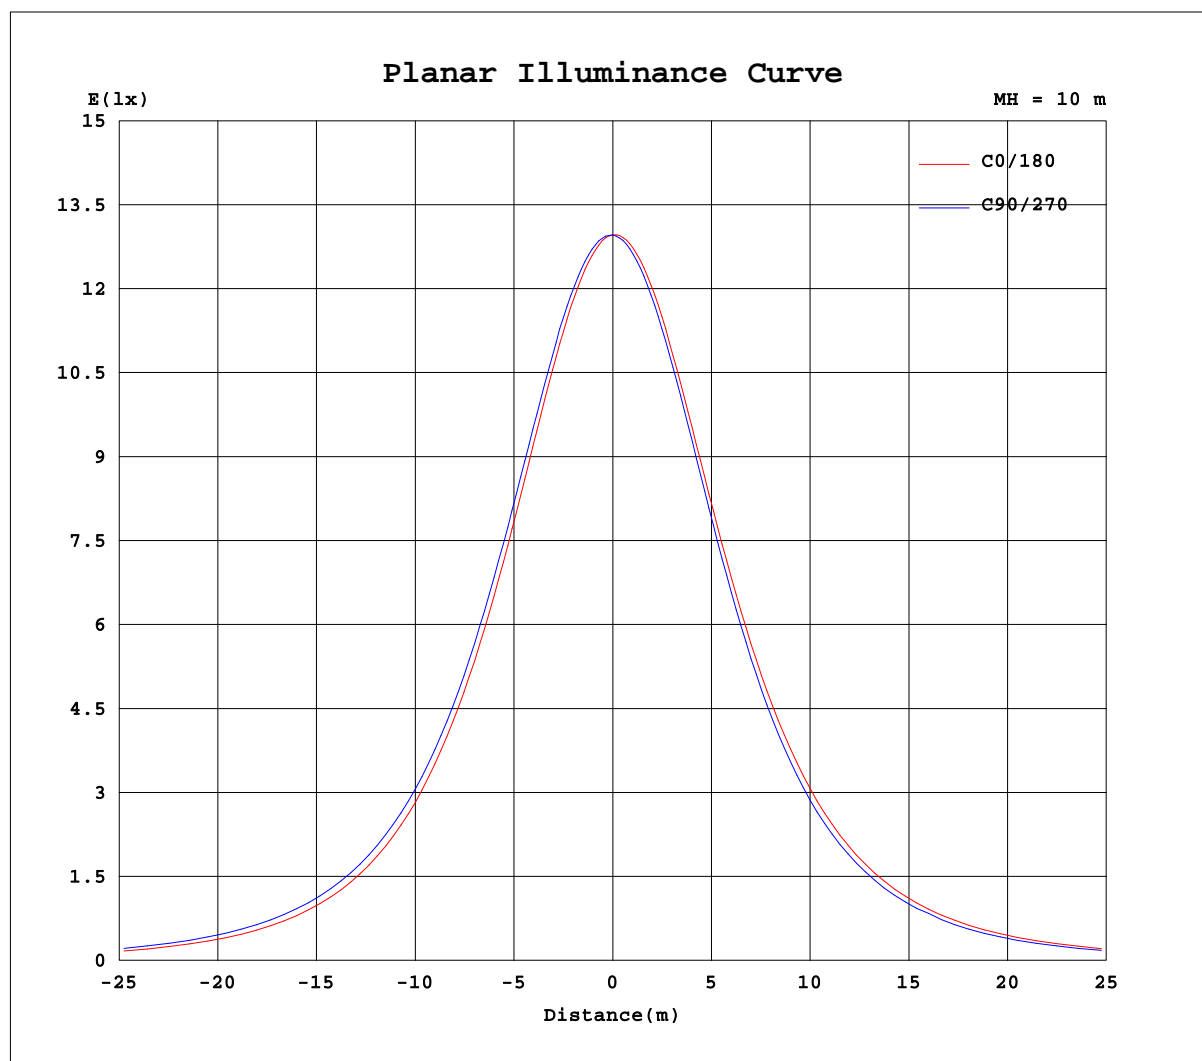

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.2V I:0.2640A P:31.40W PF:0.9950 Lamp Flux:3689.04x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1296	1296	1296	1296	1296	1296	1296	1296	1296	1296	1296	1296						
5	1284	1286	1290	1293	1296	1299	1295	1293	1290	1286	1282	1279						
10	1260	1263	1270	1278	1284	1290	1280	1277	1271	1263	1257	1250						
15	1223	1225	1238	1252	1260	1267	1253	1248	1239	1228	1215	1209						
20	1175	1178	1196	1210	1224	1230	1211	1208	1195	1182	1167	1158						
25	1116	1122	1142	1160	1176	1184	1160	1156	1142	1126	1108	1096						
30	1049	1056	1079	1101	1119	1127	1099	1095	1079	1059	1039	1026						
35	974	983	1006	1030	1050	1062	1030	1025	1006	983	962	948						
40	892	903	927	952	974	988	954	947	927	900	878	864						
45	800	816	841	867	890	907	870	863	840	811	789	772						
50	704	721	749	777	801	820	776	771	748	717	694	673						
55	604	621	653	682	707	724	678	672	652	619	596	571						
60	499	518	552	584	609	622	577	569	552	515	495	465						
65	395	415	448	483	506	519	473	463	448	414	391	360						
70	292	312	345	382	403	415	370	358	344	312	288	258						
75	193	212	245	283	299	311	267	254	242	214	188	161						
80	99.5	117	150	186	199	210	167	157	146	121	95.9	71.6						
85	19.4	32.7	62.6	95.6	109	116	74.0	66.4	58.4	35.4	21.2	7.49						
90	2.78	2.78	5.35	17.5	31.8	31.3	8.52	7.43	4.21	2.77	3.12	3.18						
95	4.10	4.06	3.91	3.39	3.20	2.79	2.84	3.11	3.60	4.08	4.36	4.48						
100	5.66	5.56	5.35	4.89	4.47	4.05	4.13	4.40	4.95	5.65	5.85	5.97						
105	7.34	7.21	6.99	6.64	6.00	5.53	5.59	5.85	6.45	7.36	7.46	7.58						
110	9.15	8.98	8.76	8.53	7.70	7.14	7.16	7.44	8.06	9.19	9.16	9.30						
115	10.9	10.8	10.5	10.5	9.43	8.88	8.83	9.08	9.68	11.0	10.8	11.0						
120	12.7	12.4	12.2	12.4	11.1	10.6	10.5	10.7	11.2	12.8	12.4	12.5						
125	14.2	13.9	13.7	14.1	12.7	12.2	12.0	12.2	12.7	14.3	13.9	14.0						
130	15.6	15.3	15.2	15.7	14.2	13.7	13.4	13.5	14.1	15.8	15.3	15.3						
135	16.8	16.5	16.5	17.1	15.5	15.0	14.7	14.7	15.3	17.0	16.5	16.4						
140	17.8	17.6	17.8	18.4	16.8	16.2	15.8	15.8	16.5	18.1	17.7	17.4						
145	18.6	18.6	19.0	19.4	18.0	17.3	16.8	16.8	17.6	19.0	18.8	18.4						
150	19.4	19.6	20.0	20.3	19.1	18.3	17.8	17.8	18.7	19.9	19.7	19.5						
155	20.2	20.7	20.8	21.1	20.1	19.2	18.8	18.8	19.8	20.9	20.6	20.6						
160	21.2	21.8	21.7	21.9	21.1	20.2	20.2	20.0	20.9	21.9	21.6	21.8						
165	22.3	22.9	22.6	22.7	22.2	21.2	21.6	21.1	21.9	22.8	22.5	22.8						
170	23.4	23.7	23.2	23.5	23.2	22.3	23.2	22.4	23.0	23.7	23.3	23.6						
175	24.7	24.3	23.9	24.3	24.0	23.4	24.7	23.7	23.9	24.5	24.1	24.3						
180	25.4	24.6	24.4	24.9	24.6	24.4	25.5	24.6	24.4	24.9	24.6	24.3						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10