


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm					
NAME: 二代线条灯		TYPE: 白色外壳		WEIGHT:	
DIM.: 4FT		SPEC.: 4000K		SERIAL No.: 认证样品	
MFR.: YQ		SUR.:		PROTECTION ANGLE:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.99 lm/W			
MODEL		I _{max} (cd)	1366	S/MH(C0/180)	1.25
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	3851.1	η UP,DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	3851.06	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.1	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

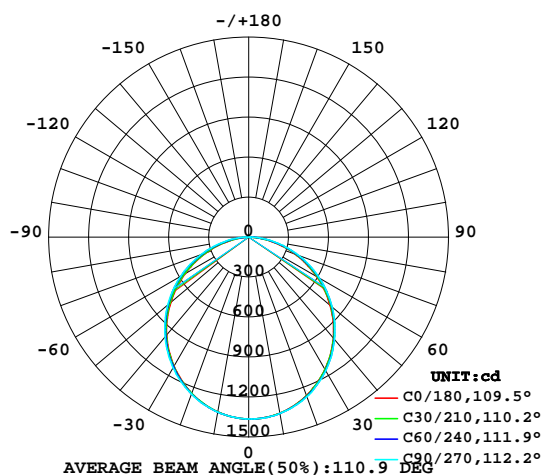

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

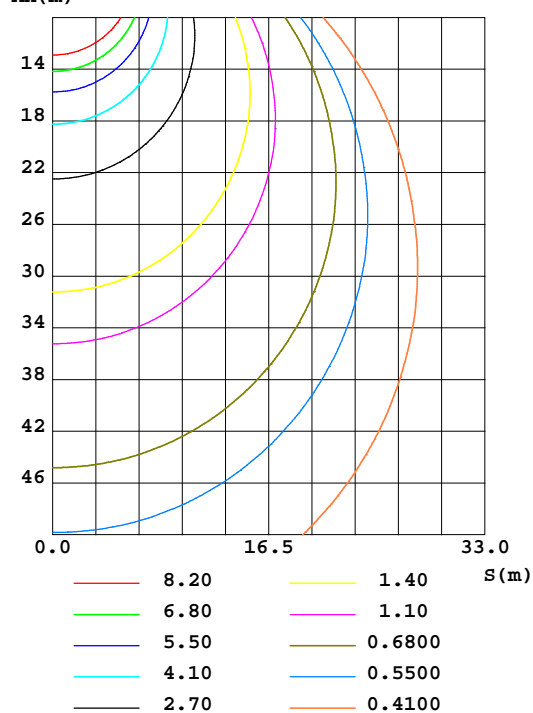


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1341	1343	1344	1343	1333	1333	1334	1334	0- 10	129.0	129.0	3.35,3.35
20	1266	1271	1275	1270	1251	1252	1255	1254	10- 20	368.4	497.5	12.9,12.9
30	1145	1151	1157	1151	1119	1125	1134	1129	20- 30	555.1	1053	27.3,27.3
40	989.7	996.0	1002	995.9	958.8	966.8	976.7	971.2	30- 40	665.8	1718	44.6,44.6
50	798.3	810.4	818.3	811.1	764.4	779.9	792.8	785.7	40- 50	688.1	2406	62.5,62.5
60	588.2	601.4	612.1	602.0	552.3	572.6	590.0	579.5	50- 60	620.0	3027	78.6,78.6
70	367.7	380.2	396.3	381.6	333.9	354.5	376.2	362.3	60- 70	473.6	3500	90.9,90.9
80	156.4	166.6	184.7	166.9	122.4	144.0	170.9	151.8	70- 80	276.5	3777	98.1,98.1
90	4.745	3.580	4.294	3.244	0.2942	0.5577	0.7470	0.9002	80- 90	72.07	3849	99.9,99.9
100	0.2198	0.2247	0.2122	0.2140	0.2637	0.3106	0.2695	0.3135	90-100	0.4215	3849	99.9,99.9
110	0.2446	0.2628	0.2638	0.2599	0.2695	0.3018	0.2943	0.3030	100-110	0.2804	3849	100,100
120	0.2943	0.3211	0.3307	0.3173	0.3173	0.3421	0.3382	0.3412	110-120	0.2981	3850	100,100
130	0.3573	0.3775	0.3919	0.3717	0.3862	0.3976	0.4013	0.3937	120-130	0.3199	3850	100,100
140	0.4051	0.4186	0.4454	0.4176	0.4377	0.4425	0.4567	0.4386	130-140	0.3167	3850	100,100
150	0.4605	0.4749	0.4932	0.4702	0.4817	0.4855	0.4988	0.4817	140-150	0.2840	3851	100,100
160	0.5522	0.5562	0.5600	0.5485	0.5736	0.5514	0.5695	0.5629	150-160	0.2367	3851	100,100
170	0.6555	0.6613	0.6441	0.6594	0.6900	0.6441	0.6460	0.6483	160-170	0.1711	3851	100,100
180	0.6498	0.6307	0.6288	0.6412	0.6498	0.6317	0.6288	0.6422	170-180	0.0623	3851	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

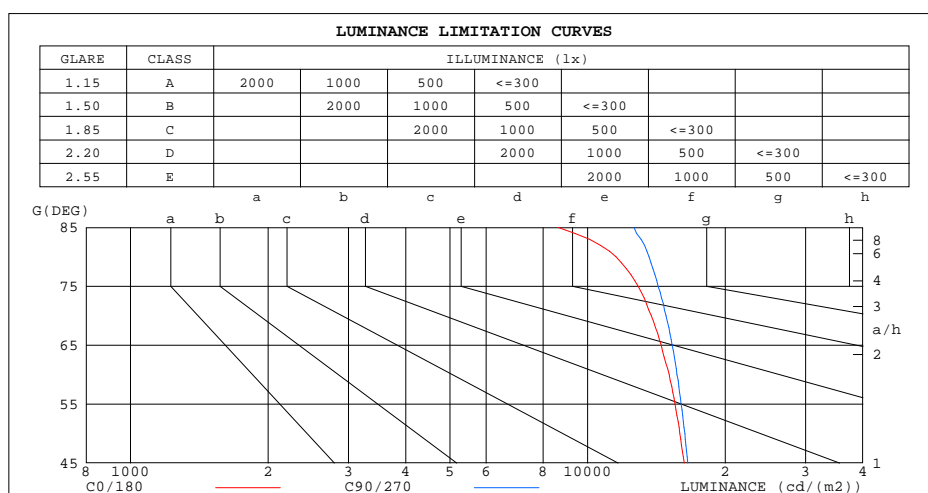

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8624	12635
80	11546	13640
75	12915	14273
70	13785	14854
65	14485	15322
60	15081	15694
55	15540	16031
50	15923	16322
45	16278	16565


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

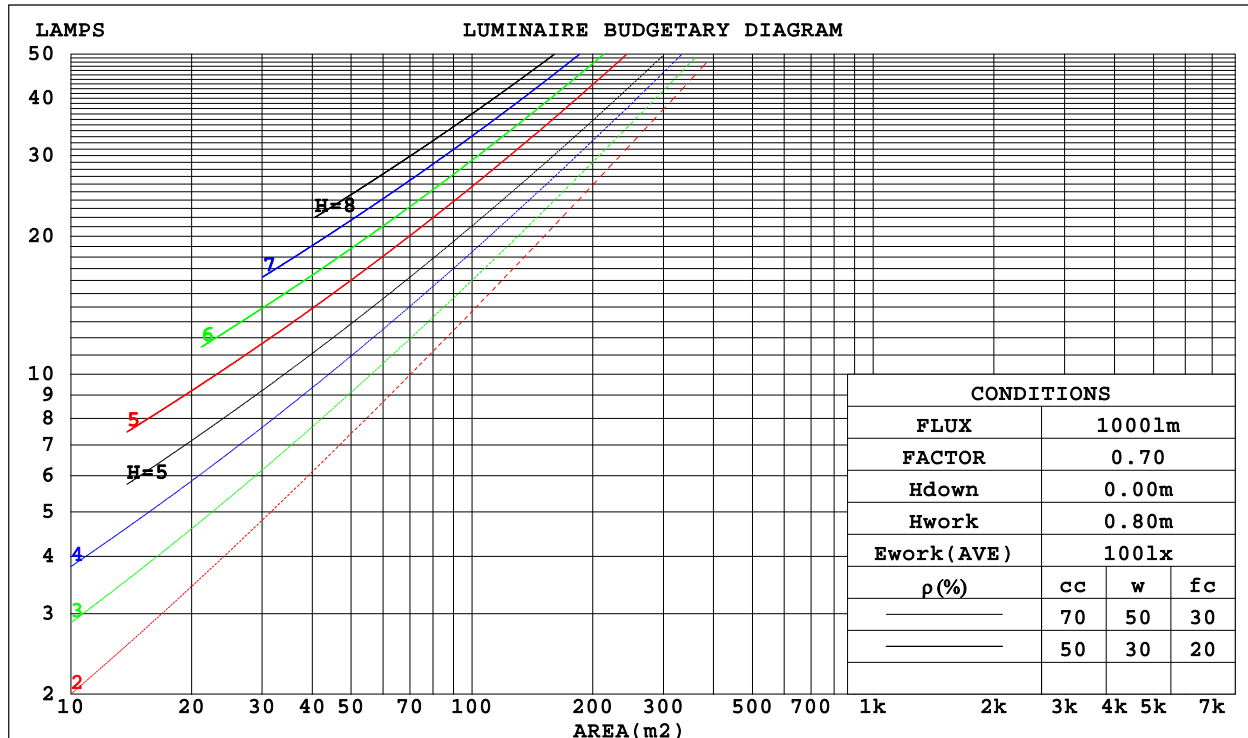

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+

WEC AND CCEC

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+

Uncorrected UGR Table

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:4000K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.4	24.0	22.7	24.2	24.4	22.6	24.1	22.9	24.3	24.5	
	3H	24.0	25.4	24.3	25.6	25.8	24.2	25.6	24.5	25.8	26.1
	4H	24.6	25.9	24.9	26.2	26.4	24.9	26.2	25.2	26.5	26.7
	6H	25.0	26.3	25.3	26.5	26.8	25.4	26.7	25.7	26.9	27.2
	8H	25.1	26.4	25.5	26.6	26.9	25.6	26.8	25.9	27.1	27.4
	12H	25.2	26.4	25.6	26.7	27.0	25.7	26.9	26.1	27.2	27.5
4H	2H	23.1	24.4	23.4	24.7	24.9	23.2	24.5	23.5	24.8	25.1
	3H	24.8	26.0	25.1	26.3	26.6	25.0	26.2	25.3	26.5	26.8
	4H	25.5	26.6	25.9	26.9	27.3	25.8	26.9	26.2	27.2	27.5
	6H	26.1	27.0	26.5	27.4	27.8	26.5	27.4	26.9	27.8	28.1
	8H	26.3	27.2	26.7	27.5	27.9	26.7	27.6	27.1	28.0	28.3
	12H	26.4	27.2	26.8	27.6	28.0	26.9	27.7	27.3	28.1	28.5
8H	4H	25.8	26.7	26.2	27.1	27.5	26.1	26.9	26.5	27.3	27.7
	6H	26.5	27.3	27.0	27.7	28.1	26.9	27.6	27.3	28.0	28.4
	8H	26.8	27.5	27.3	27.9	28.3	27.2	27.9	27.7	28.3	28.7
	12H	27.0	27.5	27.5	28.0	28.5	27.5	28.0	28.0	28.5	29.0
12H	4H	25.8	26.7	26.3	27.1	27.5	26.1	26.9	26.5	27.3	27.7
	6H	26.6	27.3	27.1	27.7	28.2	26.9	27.6	27.4	28.0	28.5
	8H	26.9	27.5	27.4	27.9	28.4	27.3	27.9	27.8	28.3	28.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 3851 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.7)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

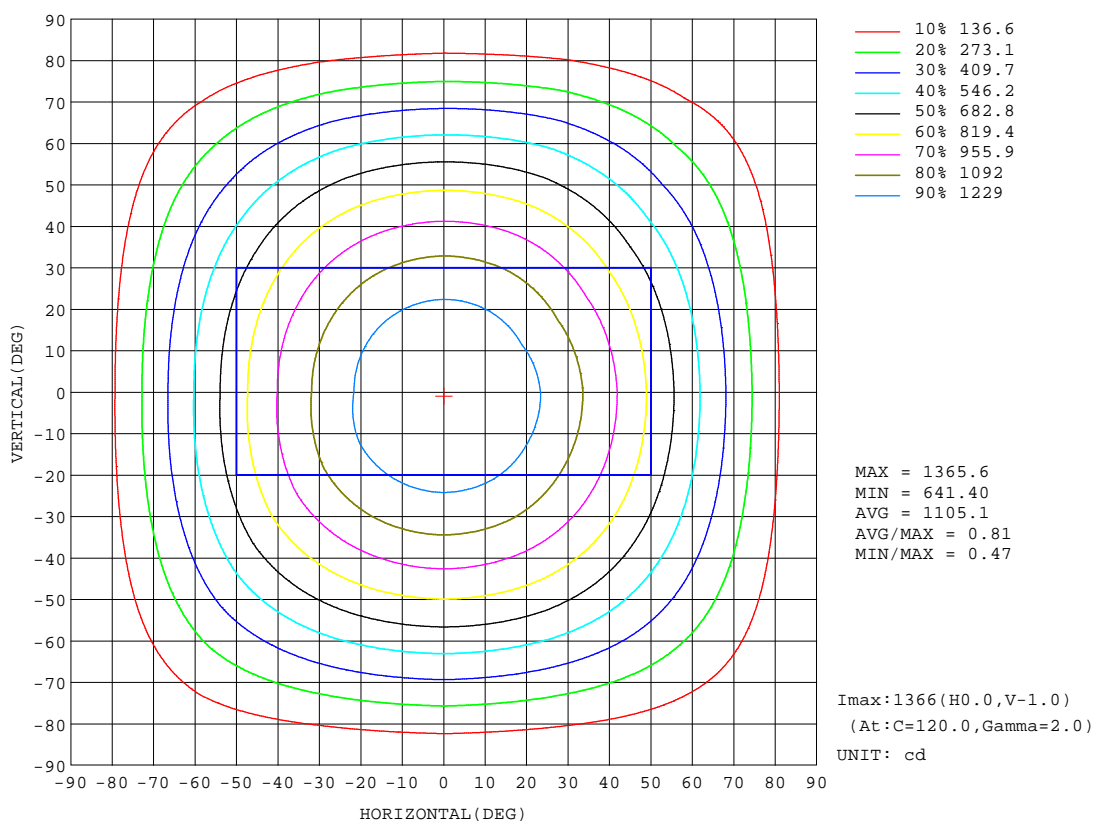


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+

AAI Figure

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Flux out:2730 lm

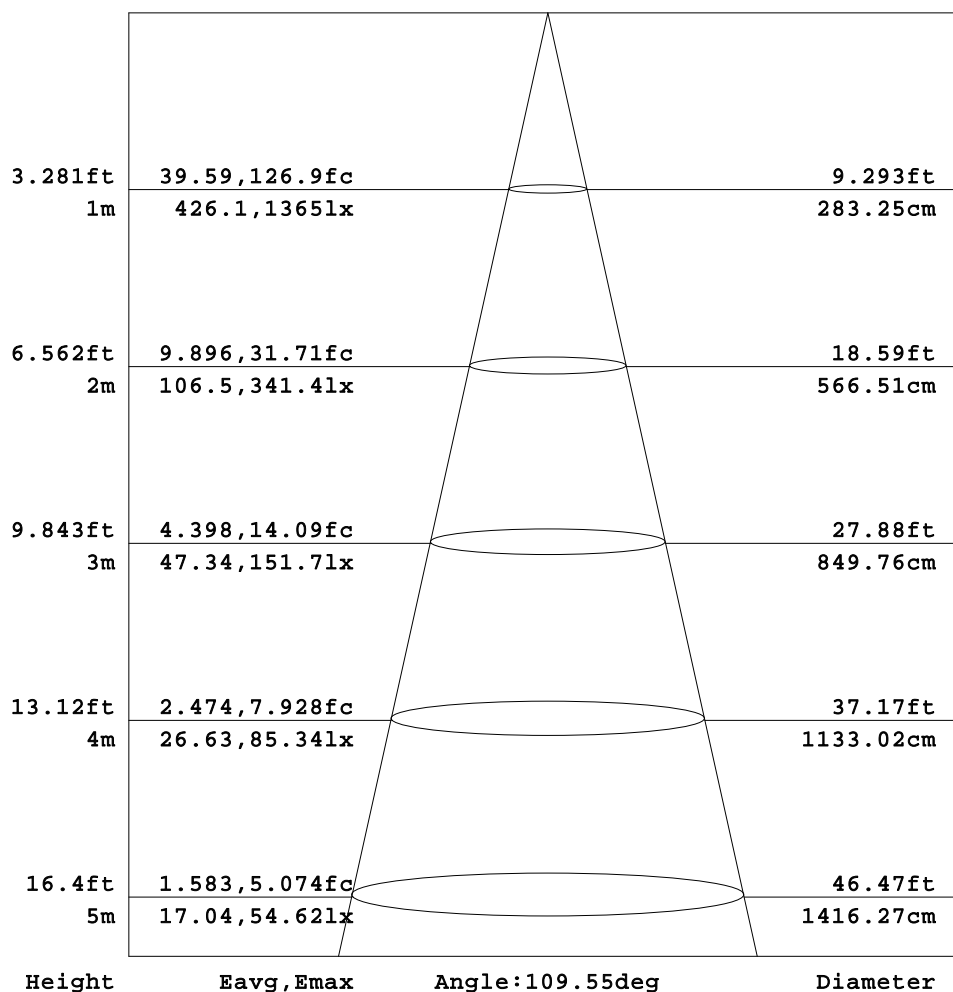


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+

ISOLUX DIAGRAM


Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

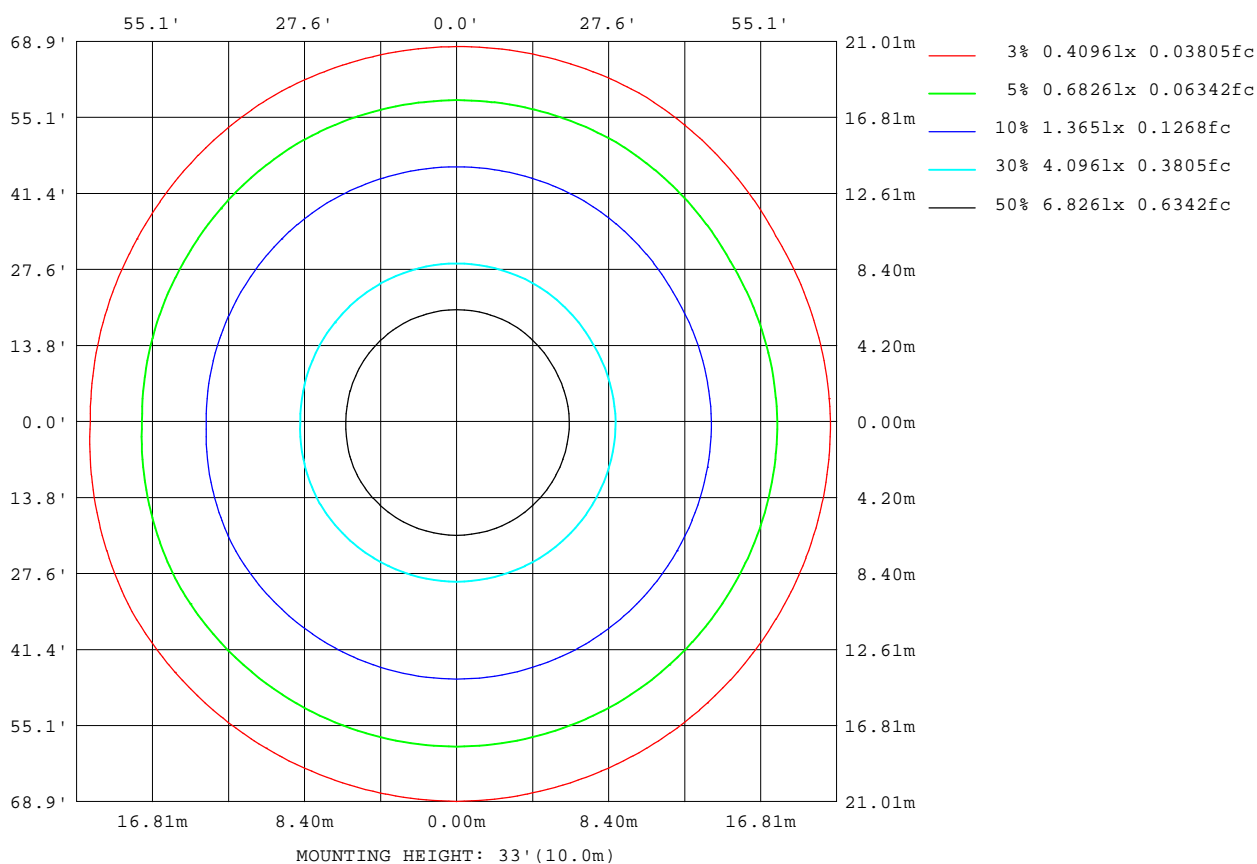

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+

Planar Illuminance Curve

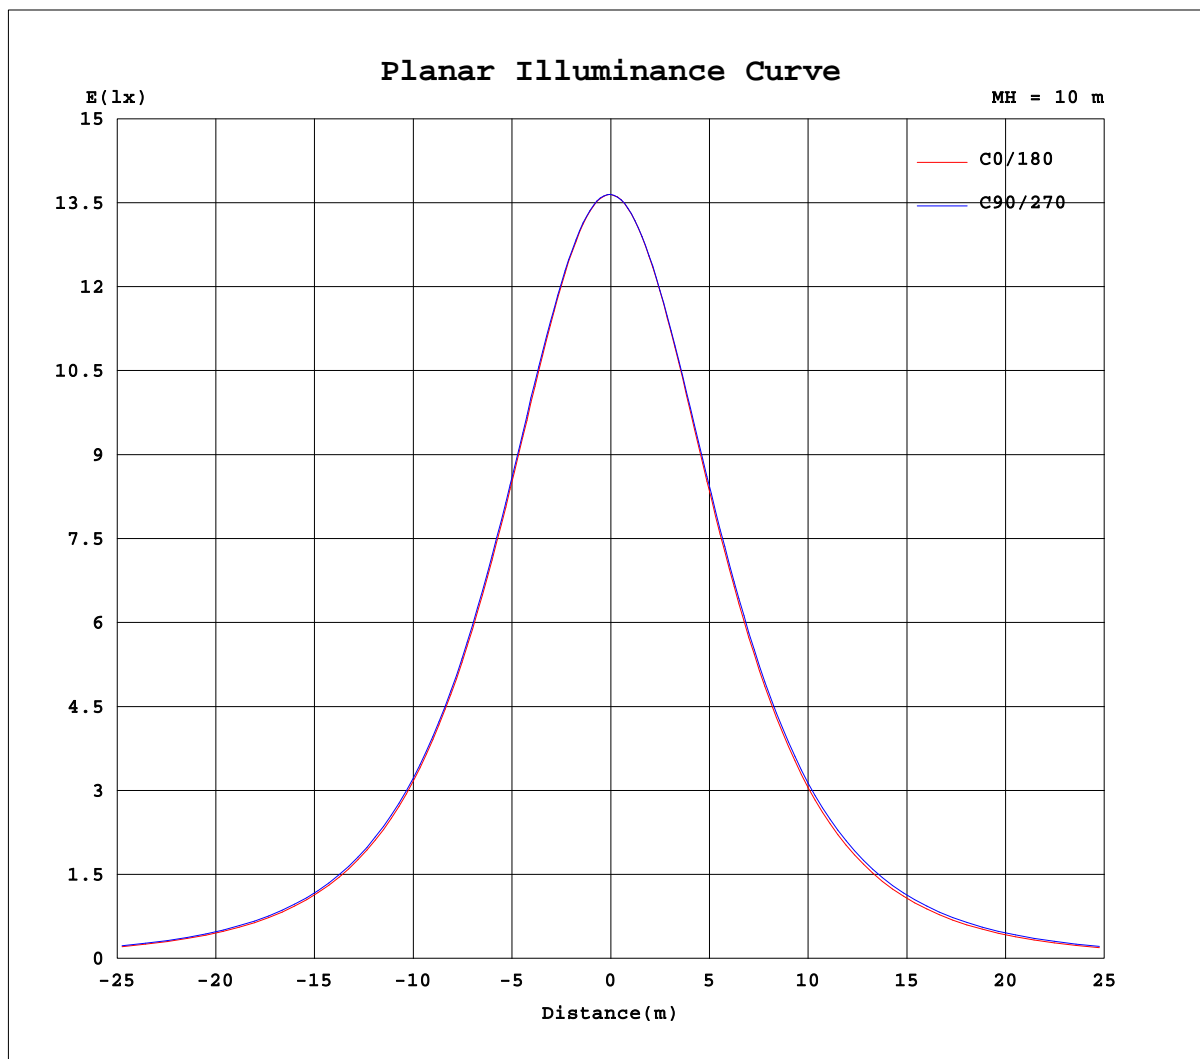

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.1V I:0.2460A P:29.40W PF:0.9830 Lamp Flux:3851.06x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365						
5	1360	1360	1361	1361	1361	1361	1356	1355	1356	1356	1357	1356						
10	1341	1343	1344	1344	1343	1343	1333	1332	1333	1334	1336	1333						
15	1310	1312	1314	1315	1314	1312	1298	1297	1299	1300	1302	1298						
20	1266	1269	1272	1275	1271	1270	1251	1249	1254	1255	1257	1250						
25	1211	1211	1218	1220	1217	1213	1188	1191	1194	1199	1198	1193						
30	1145	1146	1156	1157	1154	1149	1119	1123	1128	1134	1133	1125						
35	1071	1074	1082	1084	1081	1075	1043	1046	1053	1058	1058	1049						
40	990	993	1000	1002	998	994	959	963	971	977	976	966						
45	898	904	910	914	909	905	865	871	882	888	888	876						
50	798	805	815	818	813	809	764	772	788	793	794	778						
55	695	702	715	717	712	705	660	669	689	693	695	674						
60	588	594	609	612	607	597	552	561	584	590	592	567						
65	477	485	496	505	497	488	443	450	476	482	486	457						
70	368	375	385	396	386	377	334	341	368	376	377	347						
75	261	266	276	288	277	268	227	234	260	271	270	240						
80	156	162	171	185	171	163	122	131	157	171	166	137						
85	58.6	61.6	74.6	85.9	73.6	63.1	28.5	35.9	58.3	74.8	67.6	41.6						
90	4.75	4.16	3.00	4.29	2.45	4.04	0.29	0.41	0.71	0.75	1.34	0.46						
95	0.22	0.22	0.23	0.20	0.22	0.20	0.26	0.33	0.34	0.28	0.34	0.36						
100	0.22	0.22	0.23	0.21	0.22	0.21	0.26	0.31	0.31	0.27	0.30	0.32						
105	0.22	0.23	0.25	0.24	0.24	0.22	0.26	0.30	0.31	0.28	0.31	0.31						
110	0.24	0.26	0.27	0.26	0.27	0.25	0.27	0.30	0.30	0.29	0.29	0.31						
115	0.27	0.28	0.30	0.29	0.29	0.28	0.29	0.30	0.33	0.31	0.32	0.32						
120	0.29	0.32	0.33	0.33	0.32	0.31	0.32	0.33	0.35	0.34	0.34	0.34						
125	0.32	0.35	0.35	0.36	0.35	0.34	0.35	0.36	0.39	0.37	0.37	0.37						
130	0.36	0.37	0.38	0.39	0.38	0.37	0.39	0.39	0.41	0.40	0.39	0.40						
135	0.38	0.40	0.40	0.42	0.40	0.39	0.42	0.42	0.43	0.43	0.41	0.42						
140	0.41	0.42	0.42	0.45	0.42	0.41	0.44	0.44	0.44	0.46	0.44	0.44						
145	0.43	0.45	0.44	0.46	0.45	0.44	0.45	0.46	0.46	0.47	0.46	0.45						
150	0.46	0.48	0.47	0.49	0.48	0.46	0.48	0.48	0.49	0.50	0.48	0.48						
155	0.49	0.51	0.50	0.52	0.50	0.50	0.51	0.50	0.52	0.53	0.52	0.51						
160	0.55	0.56	0.55	0.56	0.55	0.54	0.57	0.54	0.56	0.57	0.56	0.57						
165	0.60	0.63	0.60	0.60	0.60	0.60	0.63	0.60	0.60	0.61	0.61	0.62						
170	0.66	0.68	0.64	0.64	0.65	0.67	0.69	0.65	0.64	0.65	0.64	0.65						
175	0.66	0.67	0.65	0.65	0.66	0.67	0.67	0.64	0.62	0.63	0.62	0.64						
180	0.65	0.64	0.62	0.63	0.63	0.65	0.65	0.64	0.62	0.63	0.63	0.65						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+