


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm					
NAME: 二代线条灯		TYPE: 白色外壳		WEIGHT:	
DIM.: 4FT		SPEC.: 3000K		SERIAL No.: 认证样品	
MFR.: YQ		SUR.:		PROTECTION ANGLE:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.52 lm/W			
MODEL		I _{max} (cd)	1767	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	4981.0	η UP,DN(C0-180)	0.0,51.1
NOMINAL FLUX(lm)	4980.97	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.9
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

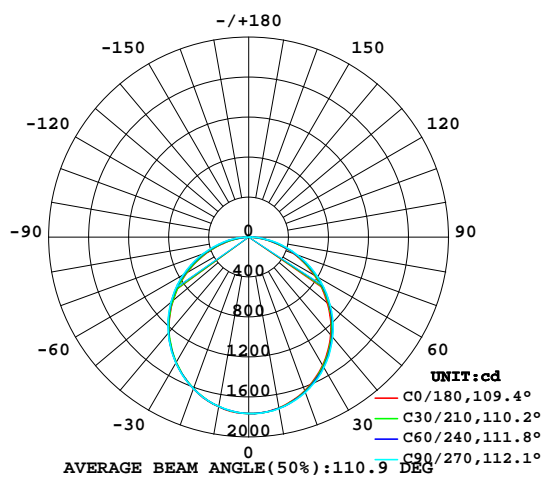

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

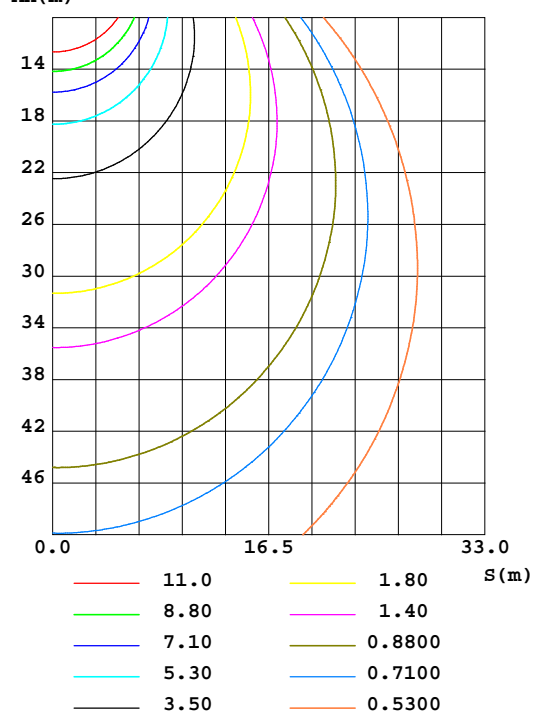


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1736	1740	1742	1739	1725	1722	1721	1722	0- 10	166.9	166.9	3.35,3.35
20	1638	1646	1655	1646	1617	1614	1616	1616	10- 20	476.4	643.3	12.9,12.9
30	1481	1495	1507	1495	1452	1452	1457	1454	20- 30	718.3	1362	27.3,27.3
40	1279	1295	1307	1294	1242	1245	1253	1250	30- 40	861.6	2223	44.6,44.6
50	1031	1053	1066	1053	990.0	1003	1016	1009	40- 50	889.7	3113	62.5,62.5
60	759.3	781.2	797.8	782.1	715.2	736.1	755.0	744.4	50- 60	801.1	3914	78.6,78.6
70	474.9	493.3	515.7	495.1	432.6	455.7	481.4	465.4	60- 70	612.7	4527	90.9,90.9
80	201.0	215.1	238.9	215.4	160.2	185.5	218.9	195.6	70- 80	357.1	4884	98.98
90	6.094	4.623	5.106	4.125	0.3821	0.8081	1.114	1.263	80- 90	93.85	4978	99.9,99.9
100	0.2909	0.2876	0.2695	0.2723	0.3345	0.4042	0.3555	0.4138	90-100	0.8338	4978	99.9,99.9
110	0.3153	0.3373	0.3326	0.3278	0.3536	0.3932	0.3841	0.3985	100-110	0.3626	4979	100,100
120	0.3821	0.4080	0.4167	0.4023	0.4110	0.4453	0.4414	0.4482	110-120	0.3850	4979	100,100
130	0.4586	0.4807	0.4951	0.4759	0.5009	0.5208	0.5236	0.5103	120-130	0.4123	4980	100,100
140	0.5217	0.5361	0.5658	0.5332	0.5658	0.5743	0.5924	0.5677	130-140	0.4081	4980	100,100
150	0.5905	0.6078	0.6289	0.6030	0.6174	0.6279	0.6498	0.6260	140-150	0.3657	4980	100,100
160	0.7127	0.7167	0.7168	0.7034	0.7398	0.7148	0.7396	0.7349	150-160	0.3053	4981	100,100
170	0.8427	0.8495	0.8295	0.8476	0.8887	0.8294	0.8314	0.8514	160-170	0.2207	4981	100,100
180	0.8333	0.8132	0.8104	0.8285	0.8352	0.8123	0.8104	0.8295	170-180	0.0803	4981	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

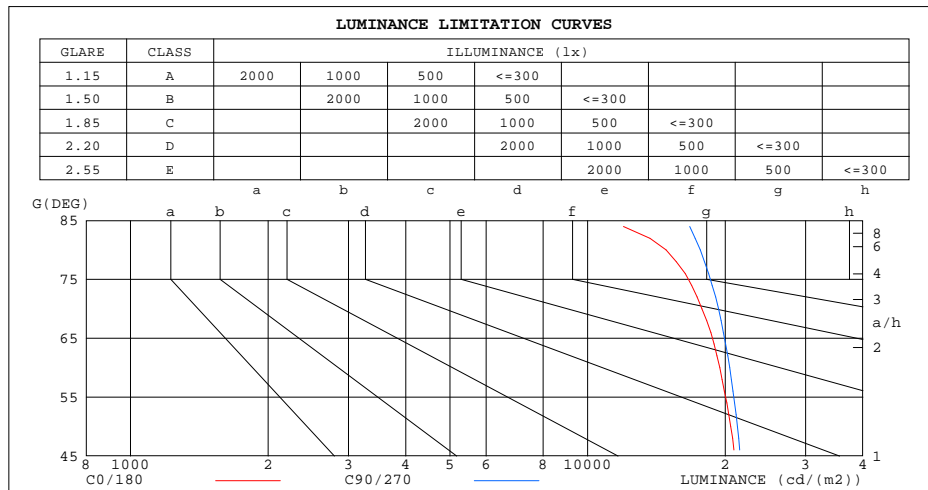

LUMINANCE cd/(m ²)		
G(°)	C0/180	C90/270
85	14362	20056
80	14839	17640
75	18005	19947
70	17800	19330
65	19616	20801
60	19469	20456
55	20660	21497
50	20567	21267
45	21468	22000


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

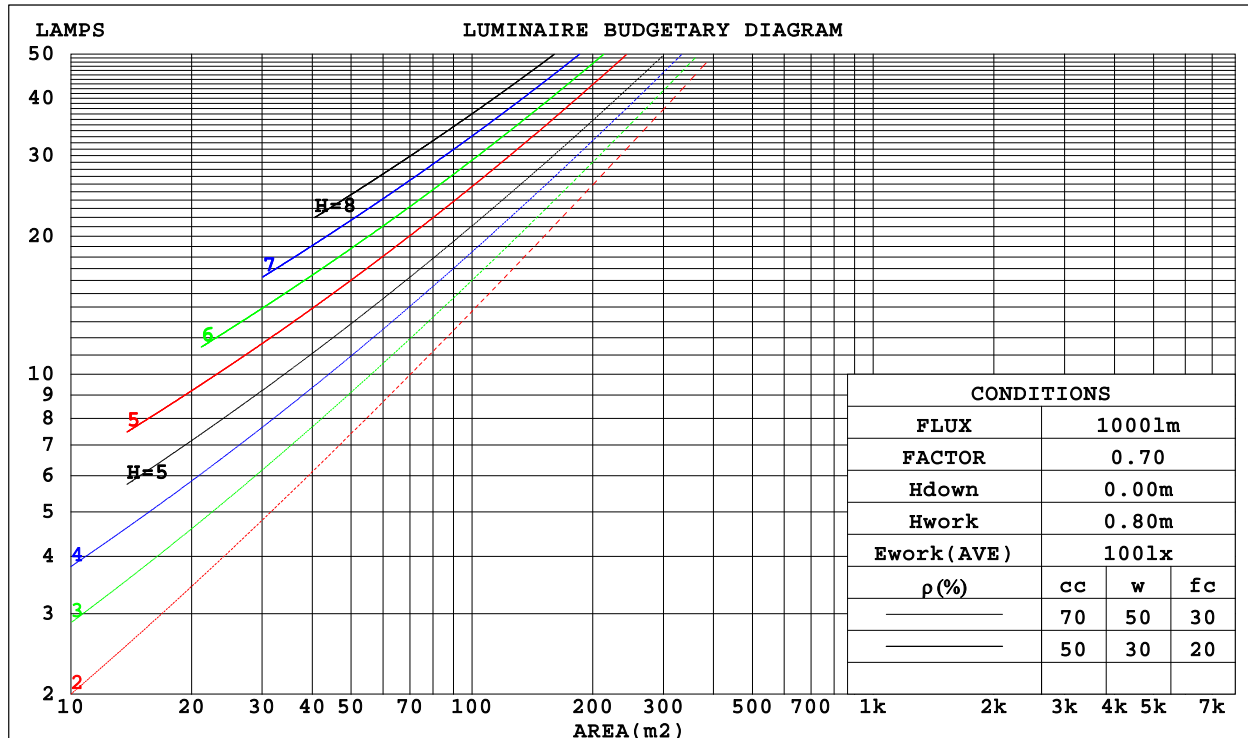

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

WEC AND CCEC

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.049	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.030	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.142	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.057	.022	.074	.040	.016	.043	.023	.010	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Uncorrected UGR Table

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:3000K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.9	23.6	25.1	25.3	23.5	25.1	23.8	25.3	25.5	
	3H	24.9	26.3	25.2	26.5	26.7	25.1	26.5	25.4	26.8	27.0
	4H	25.5	26.8	25.8	27.1	27.3	25.8	27.2	26.1	27.4	27.7
	6H	25.9	27.2	26.2	27.4	27.7	26.3	27.6	26.7	27.9	28.1
	8H	26.0	27.2	26.4	27.5	27.8	26.5	27.7	26.9	28.0	28.3
	12H	26.1	27.3	26.4	27.6	27.9	26.6	27.8	27.0	28.1	28.4
4H	2H	24.0	25.3	24.3	25.6	25.8	24.1	25.5	24.5	25.7	26.0
	3H	25.7	26.9	26.0	27.2	27.5	25.9	27.1	26.3	27.4	27.7
	4H	26.4	27.5	26.8	27.8	28.2	26.7	27.8	27.1	28.1	28.5
	6H	27.0	27.9	27.4	28.3	28.7	27.4	28.3	27.8	28.7	29.0
	8H	27.2	28.1	27.6	28.4	28.8	27.6	28.5	28.0	28.9	29.3
	12H	27.3	28.1	27.7	28.5	28.9	27.8	28.6	28.2	29.0	29.4
8H	4H	26.7	27.6	27.1	28.0	28.4	27.0	27.9	27.4	28.2	28.6
	6H	27.4	28.2	27.9	28.6	29.0	27.8	28.5	28.2	28.9	29.4
	8H	27.7	28.3	28.2	28.8	29.2	28.1	28.8	28.6	29.2	29.7
	12H	27.9	28.4	28.3	28.9	29.3	28.4	28.9	28.9	29.4	29.9
12H	4H	26.7	27.6	27.2	28.0	28.4	27.0	27.8	27.4	28.2	28.6
	6H	27.5	28.2	28.0	28.6	29.0	27.8	28.5	28.3	28.9	29.4
	8H	27.8	28.4	28.3	28.8	29.3	28.2	28.8	28.7	29.2	29.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 4981 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

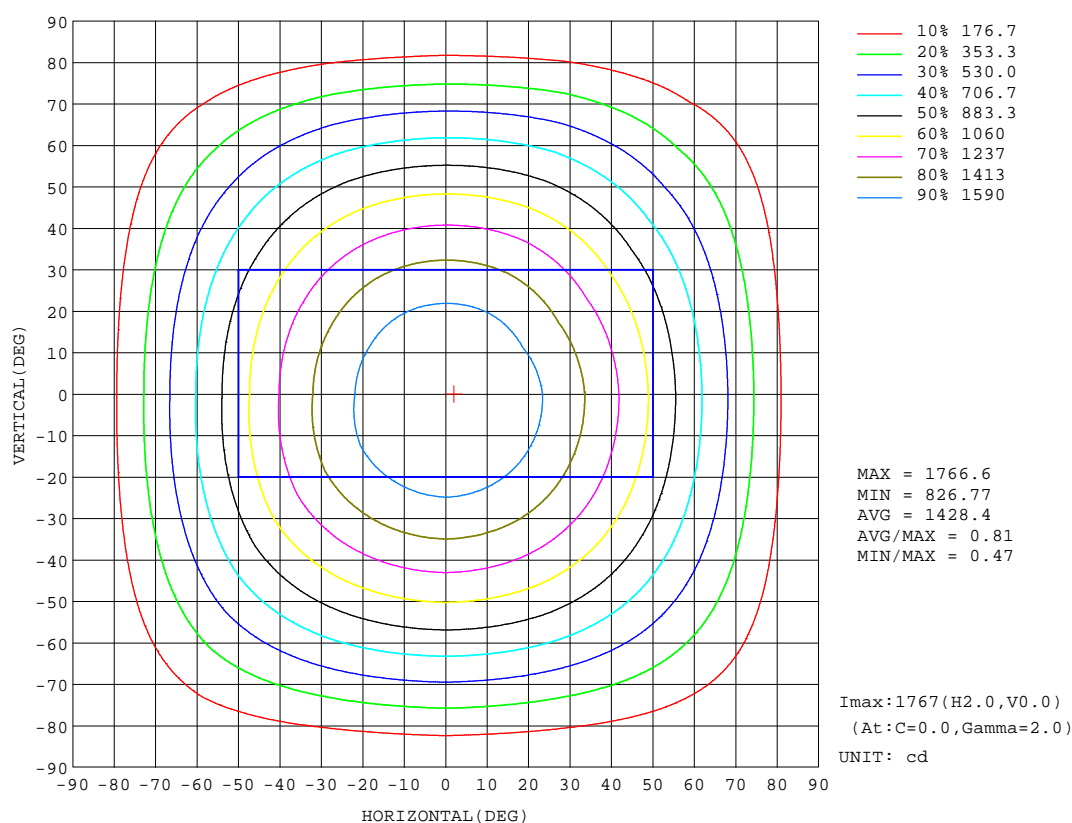


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

AAI Figure

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

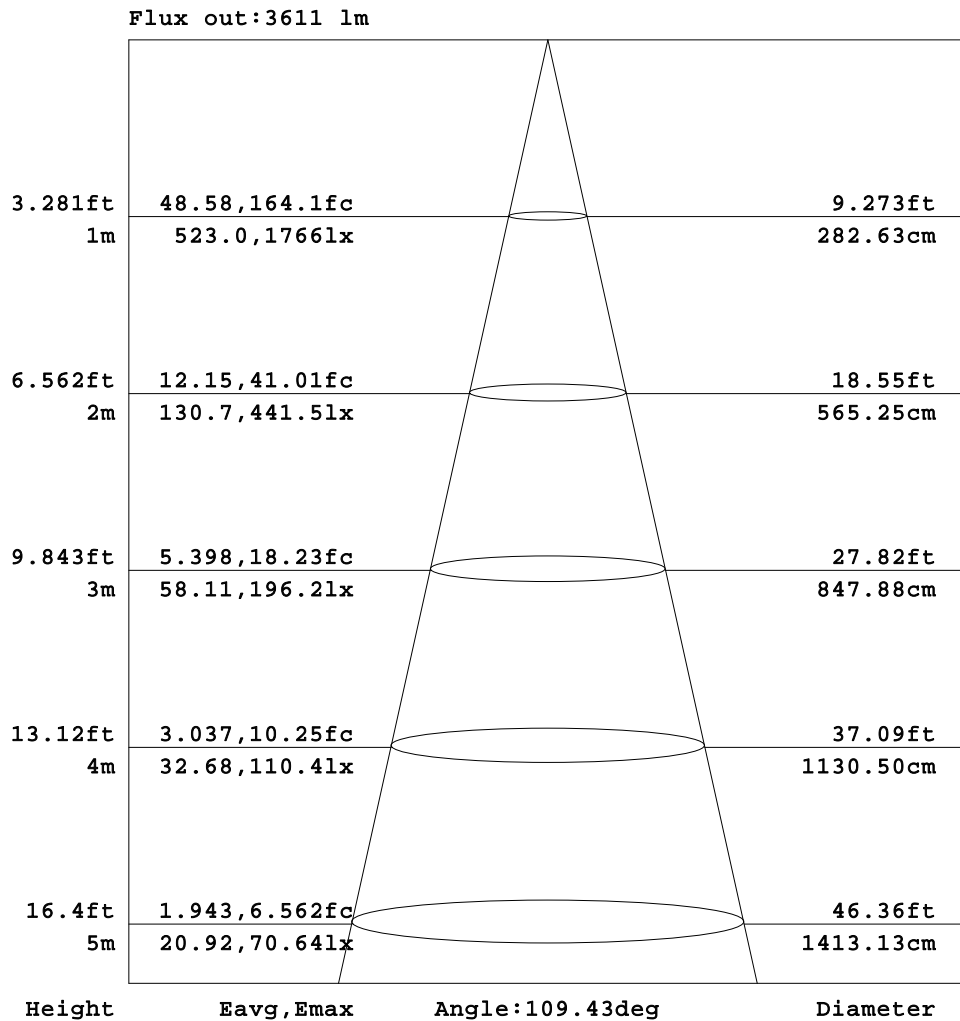


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ISOLUX DIAGRAM


Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE: 白色外壳	WEIGHT:
DIM.: 4FT	SPEC.: 3000K	SERIAL No.: 认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

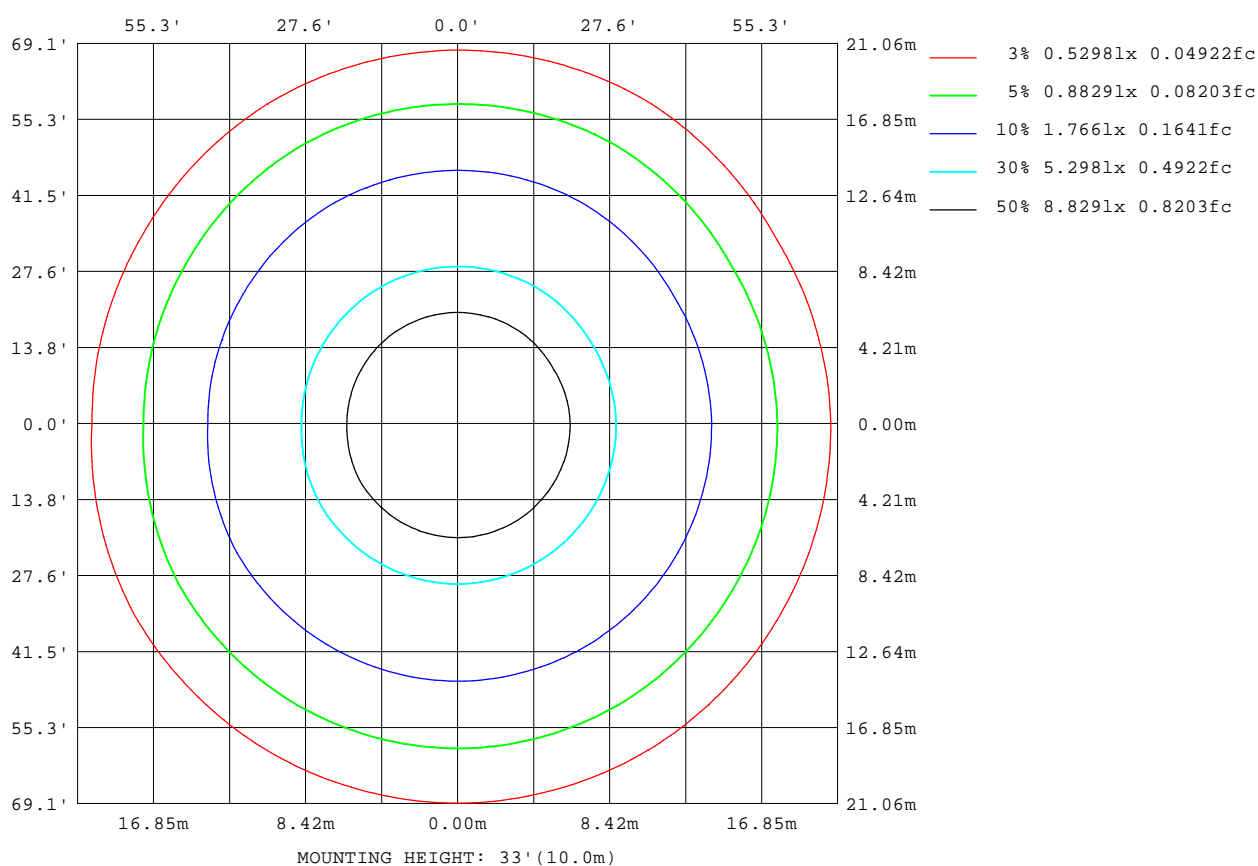

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Planar Illuminance Curve

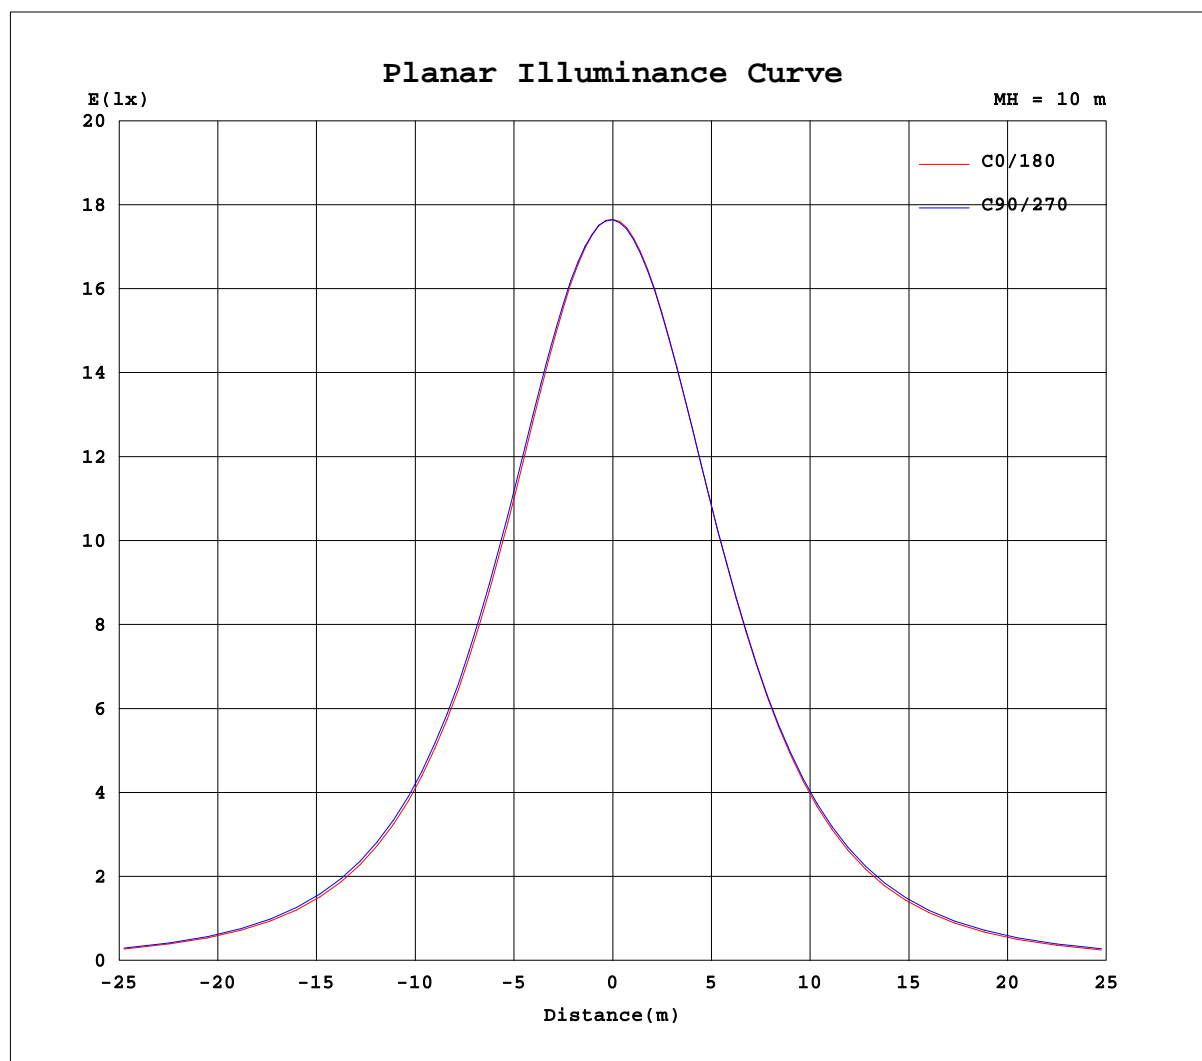

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.1V I:0.3340A P:40.00W PF:0.9890 Lamp Flux:4980.97x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1766	1766	1766	1765	1765	1765	1766	1766	1766	1765	1765	1765						
5	1763	1763	1764	1765	1763	1762	1759	1757	1756	1756	1756	1755						
10	1736	1738	1741	1742	1739	1738	1725	1722	1722	1721	1723	1721						
15	1704	1708	1712	1714	1710	1707	1689	1686	1686	1686	1688	1685						
20	1638	1643	1650	1655	1649	1644	1617	1613	1616	1616	1618	1613						
25	1580	1588	1596	1603	1595	1589	1557	1553	1557	1558	1560	1553						
30	1481	1490	1501	1507	1499	1491	1452	1449	1455	1457	1459	1450						
35	1404	1414	1426	1432	1424	1415	1374	1370	1378	1380	1382	1372						
40	1279	1290	1300	1307	1298	1291	1242	1241	1249	1253	1258	1243						
45	1184	1196	1207	1213	1205	1198	1145	1148	1157	1162	1164	1151						
50	1031	1045	1060	1066	1057	1049	990	994	1012	1016	1018	1000						
55	924	938	955	962	953	942	882	888	910	914	917	894						
60	759	771	791	798	790	774	715	723	750	755	759	730						
65	647	657	677	686	678	660	603	610	639	647	650	618						
70	475	486	500	516	502	488	433	440	472	481	484	447						
75	363	373	386	403	387	375	321	329	361	374	373	336						
80	201	210	221	239	220	211	160	169	202	219	214	177						
85	97.6	104	119	136	118	107	58.6	68.8	99.3	121	114	77.1						
90	6.09	5.36	3.89	5.11	3.14	5.11	0.38	0.54	1.08	1.11	1.91	0.62						
95	0.29	0.28	0.30	0.26	0.28	3.17	0.35	0.45	0.47	0.37	0.47	0.48						
100	0.29	0.28	0.29	0.27	0.28	0.27	0.33	0.40	0.41	0.36	0.40	0.43						
105	0.29	0.30	0.31	0.29	0.30	0.28	0.34	0.39	0.40	0.36	0.40	0.41						
110	0.32	0.33	0.34	0.33	0.33	0.32	0.35	0.39	0.40	0.38	0.39	0.41						
115	0.34	0.36	0.37	0.37	0.36	0.35	0.37	0.39	0.43	0.40	0.42	0.41						
120	0.38	0.40	0.41	0.42	0.41	0.40	0.41	0.43	0.46	0.44	0.45	0.45						
125	0.41	0.43	0.44	0.45	0.44	0.43	0.45	0.46	0.49	0.48	0.47	0.48						
130	0.46	0.48	0.49	0.50	0.48	0.47	0.50	0.51	0.53	0.52	0.50	0.52						
135	0.49	0.50	0.51	0.52	0.50	0.49	0.54	0.54	0.55	0.56	0.53	0.54						
140	0.52	0.54	0.54	0.57	0.54	0.53	0.57	0.57	0.58	0.59	0.57	0.57						
145	0.54	0.56	0.56	0.59	0.56	0.55	0.58	0.58	0.59	0.61	0.59	0.58						
150	0.59	0.61	0.61	0.63	0.61	0.60	0.62	0.62	0.63	0.65	0.63	0.62						
155	0.62	0.64	0.63	0.66	0.64	0.63	0.65	0.64	0.67	0.68	0.67	0.65						
160	0.71	0.73	0.71	0.72	0.71	0.70	0.74	0.70	0.73	0.74	0.73	0.74						
165	0.77	0.79	0.75	0.76	0.76	0.76	0.80	0.75	0.77	0.78	0.78	0.79						
170	0.84	0.87	0.83	0.83	0.83	0.86	0.89	0.83	0.83	0.83	0.84	0.87						
175	0.85	0.87	0.84	0.84	0.85	0.88	0.87	0.84	0.81	0.82	0.81	0.84						
180	0.83	0.82	0.80	0.81	0.82	0.84	0.84	0.82	0.80	0.81	0.82	0.84						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+