


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 121.45 lm/W			
MODEL		I _{max} (cd)	2113	S/MH(C0/180)	1.25
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	5951.1	η UP,DN(C0-180)	0.0,51.1
NOMINAL FLUX(lm)	5951.08	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

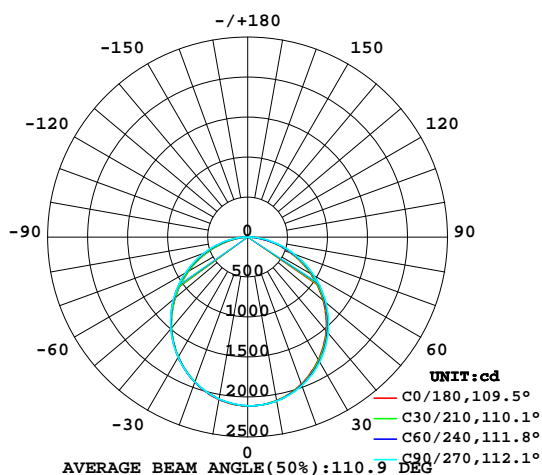

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

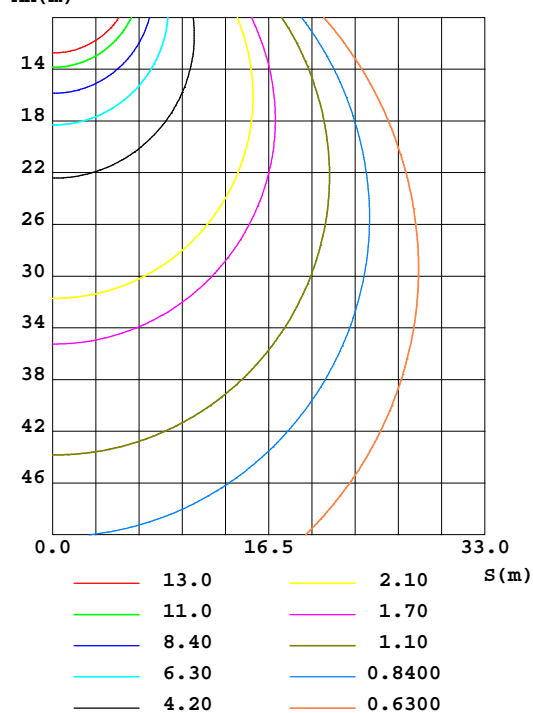


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	2076	2080	2082	2077	2063	2058	2056	2056	0- 10	199.4	199.4	3.35,3.35
20	1958	1969	1978	1967	1934	1928	1929	1929	10- 20	569.2	768.6	12.9,12.9
30	1770	1788	1802	1787	1737	1733	1738	1736	20- 30	858.3	1627	27.3,27.3
40	1528	1548	1563	1547	1488	1488	1496	1492	30- 40	1029	2656	44.6,44.6
50	1232	1259	1278	1260	1184	1198	1212	1204	40- 50	1064	3720	62.5,62.5
60	907.2	934.3	954.4	935.1	855.6	878.7	900.5	888.2	50- 60	957.3	4677	78.6,78.6
70	570.0	591.0	617.0	593.3	517.4	545.0	577.2	555.9	60- 70	732.3	5410	90.9,90.9
80	238.8	257.5	285.9	257.4	191.5	221.3	261.2	233.5	70- 80	426.6	5836	98.1,98.1
90	7.223	5.456	5.927	4.863	0.4471	0.9405	1.245	1.503	80- 90	111.2	5947	99.9,99.9
100	0.3402	0.3364	0.3154	0.3163	0.3983	0.4807	0.4205	0.4960	90-100	0.6395	5948	99.9,99.9
110	0.3765	0.3947	0.3919	0.3889	0.4148	0.4616	0.4606	0.4740	100-110	0.4289	5948	100,100
120	0.4548	0.4873	0.4951	0.4778	0.4837	0.5333	0.5331	0.5333	110-120	0.4566	5949	100,100
130	0.5484	0.5677	0.5926	0.5628	0.5945	0.6211	0.6268	0.6088	120-130	0.4906	5949	100,100
140	0.6211	0.6393	0.6747	0.6345	0.6728	0.6843	0.7090	0.6795	130-140	0.4864	5950	100,100
150	0.7070	0.7244	0.7493	0.7167	0.7379	0.7493	0.7759	0.7492	140-150	0.4366	5950	100,100
160	0.8484	0.8524	0.8506	0.8419	0.8795	0.8525	0.8867	0.8753	150-160	0.3640	5951	100,100
170	1.007	1.013	0.9882	1.011	1.059	0.9841	0.9938	1.016	160-170	0.2630	5951	100,100
180	0.9939	0.9690	0.9671	0.9881	0.9939	0.9690	0.9671	0.9881	170-180	0.0958	5951	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

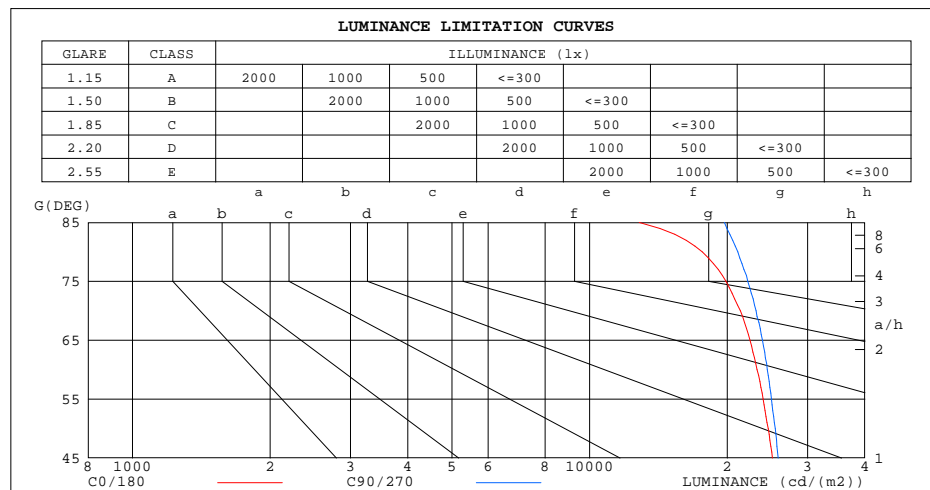

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12853	19726
80	17634	21109
75	19894	22190
70	21365	23129
65	22435	23883
60	23261	24473
55	23983	24988
50	24579	25495
45	25136	25851


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

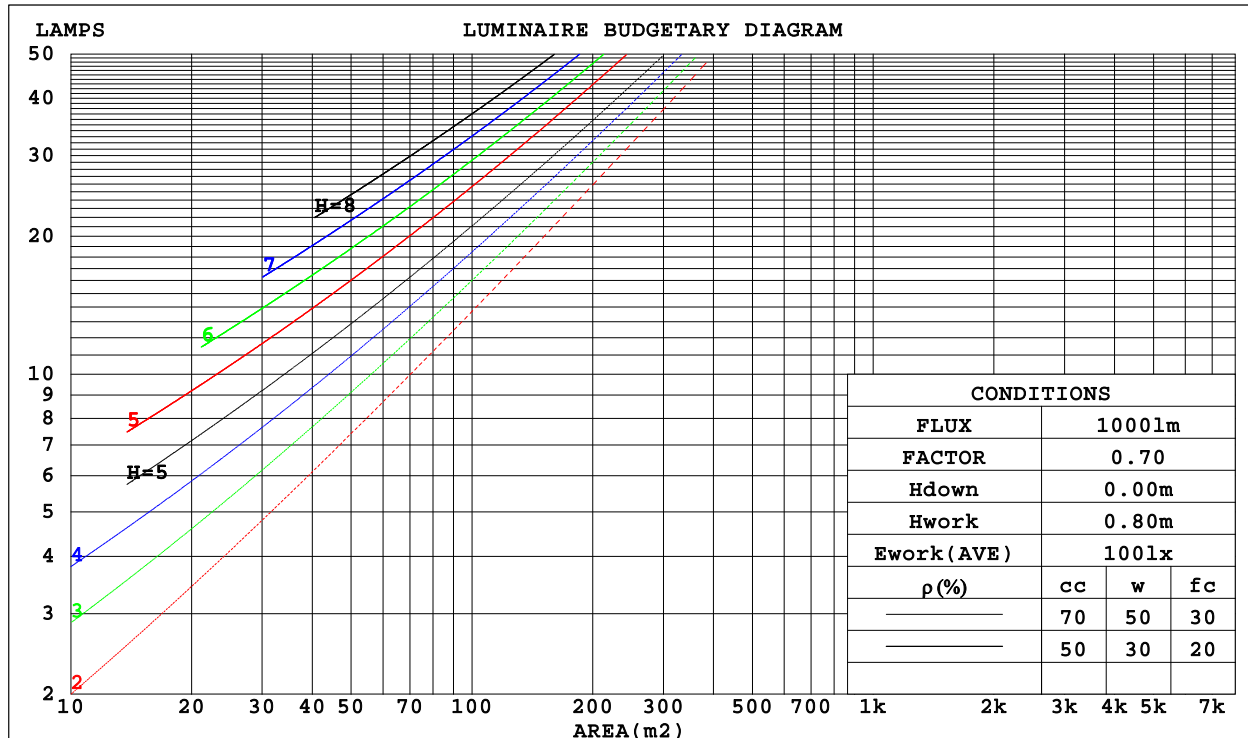

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

WEC AND CCEC

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.030	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015		
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007		
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006		
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005		
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004		
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003		
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Uncorrected UGR Table

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:3000K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.5	24.2	25.7	25.9	24.2	25.7	24.4	25.9	26.1	
	3H	25.5	26.9	25.8	27.1	27.4	25.8	27.2	26.1	27.4	27.7
	4H	26.1	27.4	26.4	27.7	27.9	26.4	27.8	26.8	28.0	28.3
	6H	26.5	27.8	26.9	28.1	28.3	27.0	28.2	27.3	28.5	28.8
	8H	26.7	27.9	27.0	28.2	28.5	27.1	28.4	27.5	28.6	28.9
	12H	26.7	27.9	27.1	28.2	28.5	27.3	28.4	27.6	28.7	29.0
4H	2H	24.6	26.0	24.9	26.2	26.5	24.8	26.1	25.1	26.4	26.6
	3H	26.3	27.5	26.7	27.8	28.1	26.6	27.7	26.9	28.0	28.3
	4H	27.1	28.1	27.4	28.5	28.8	27.4	28.4	27.7	28.7	29.1
	6H	27.6	28.6	28.0	28.9	29.3	28.0	29.0	28.4	29.3	29.7
	8H	27.8	28.7	28.2	29.1	29.4	28.2	29.1	28.7	29.5	29.9
	12H	27.9	28.7	28.3	29.1	29.5	28.4	29.2	28.9	29.6	30.0
8H	4H	27.4	28.2	27.8	28.6	29.0	27.6	28.5	28.0	28.9	29.3
	6H	28.1	28.8	28.5	29.2	29.6	28.4	29.2	28.9	29.6	30.0
	8H	28.3	29.0	28.8	29.4	29.9	28.8	29.4	29.2	29.8	30.3
	12H	28.5	29.1	29.0	29.5	30.0	29.0	29.6	29.5	30.0	30.5
12H	4H	27.4	28.2	27.8	28.6	29.0	27.6	28.4	28.1	28.8	29.2
	6H	28.1	28.8	28.6	29.2	29.7	28.5	29.1	28.9	29.6	30.0
	8H	28.4	29.0	28.9	29.5	29.9	28.9	29.4	29.3	29.9	30.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 5951 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.2)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

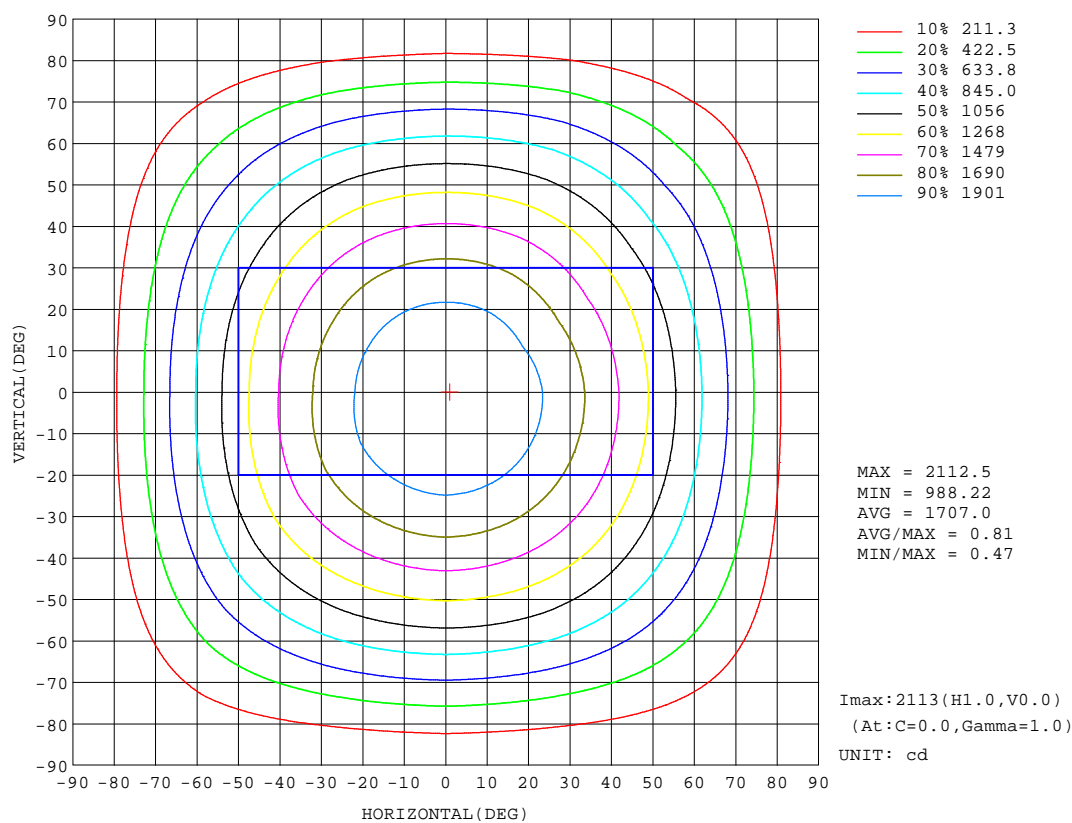


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

AAI Figure

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Flux out:4220 lm

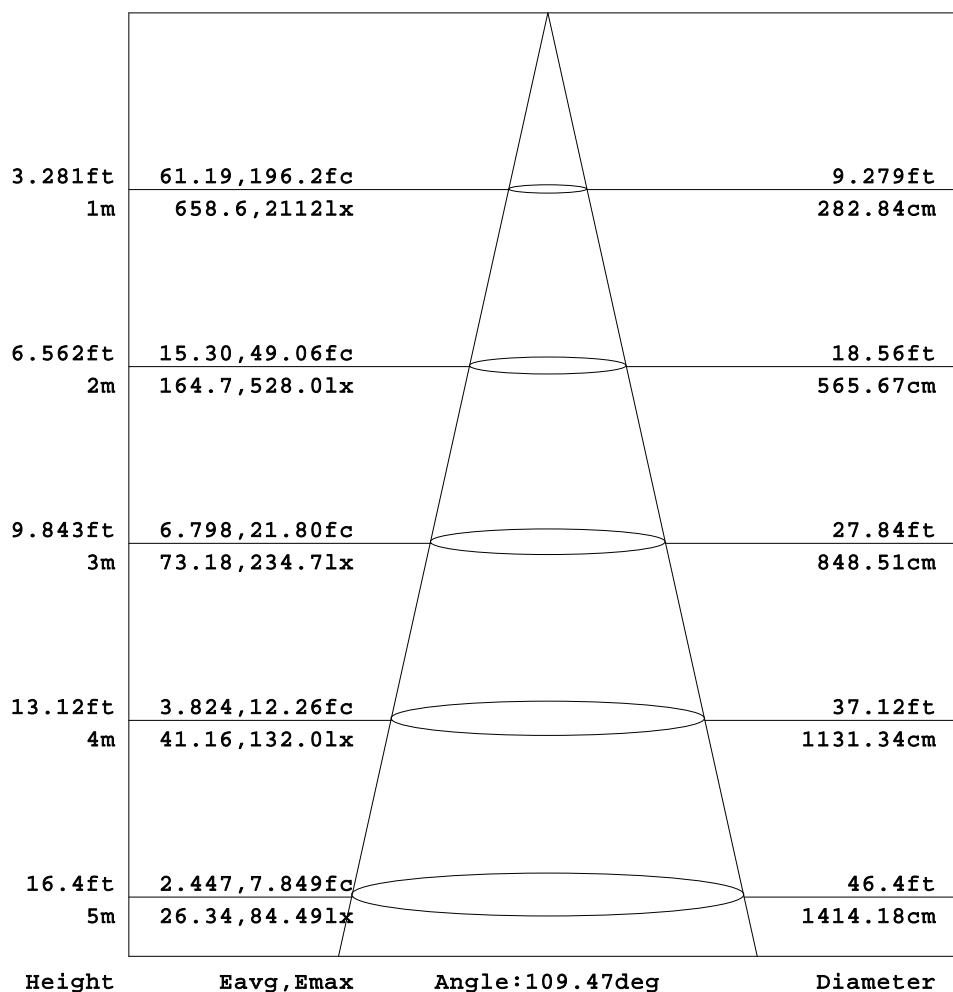


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ISOLUX DIAGRAM


Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm		
NAME: 二代线条灯	TYPE: 白色外壳	WEIGHT:
DIM.: 4FT	SPEC.: 3000K	SERIAL No.: 认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

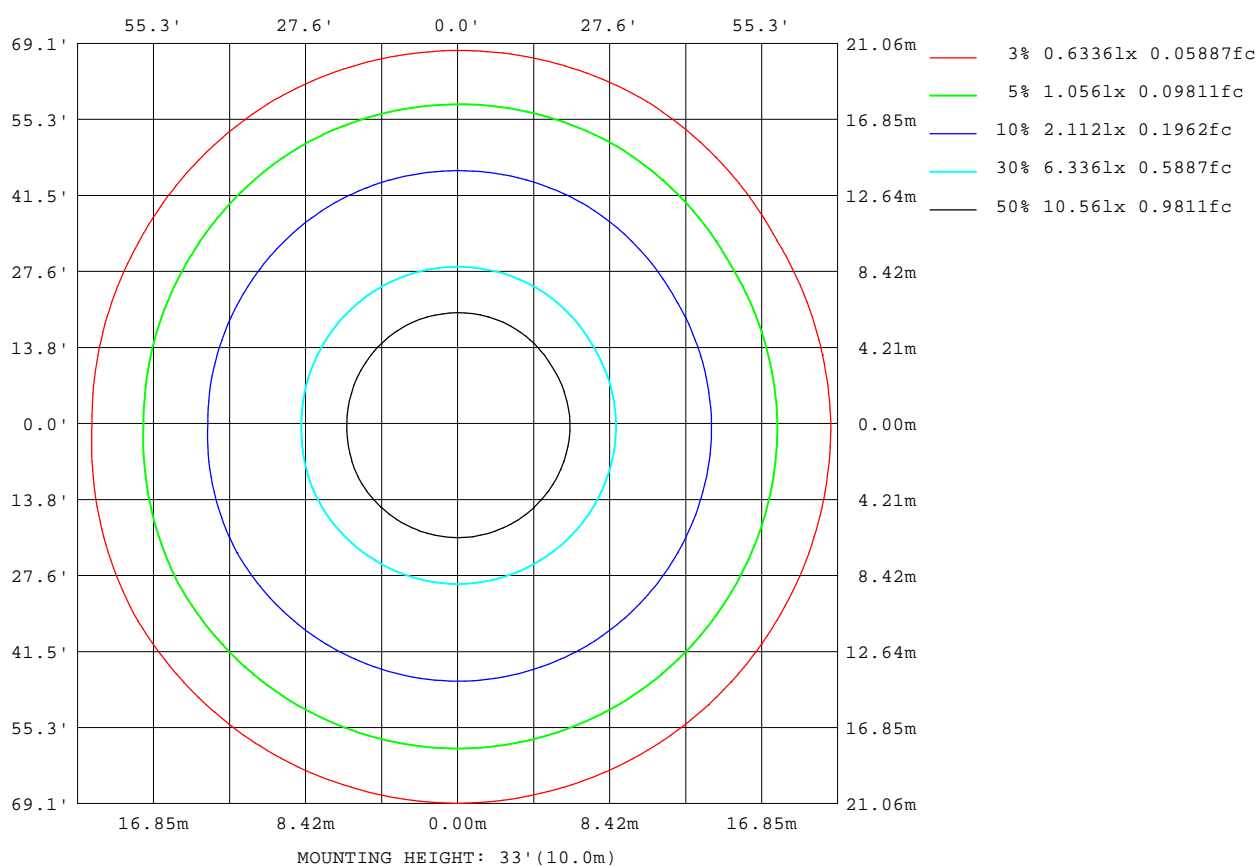

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Planar Illuminance Curve

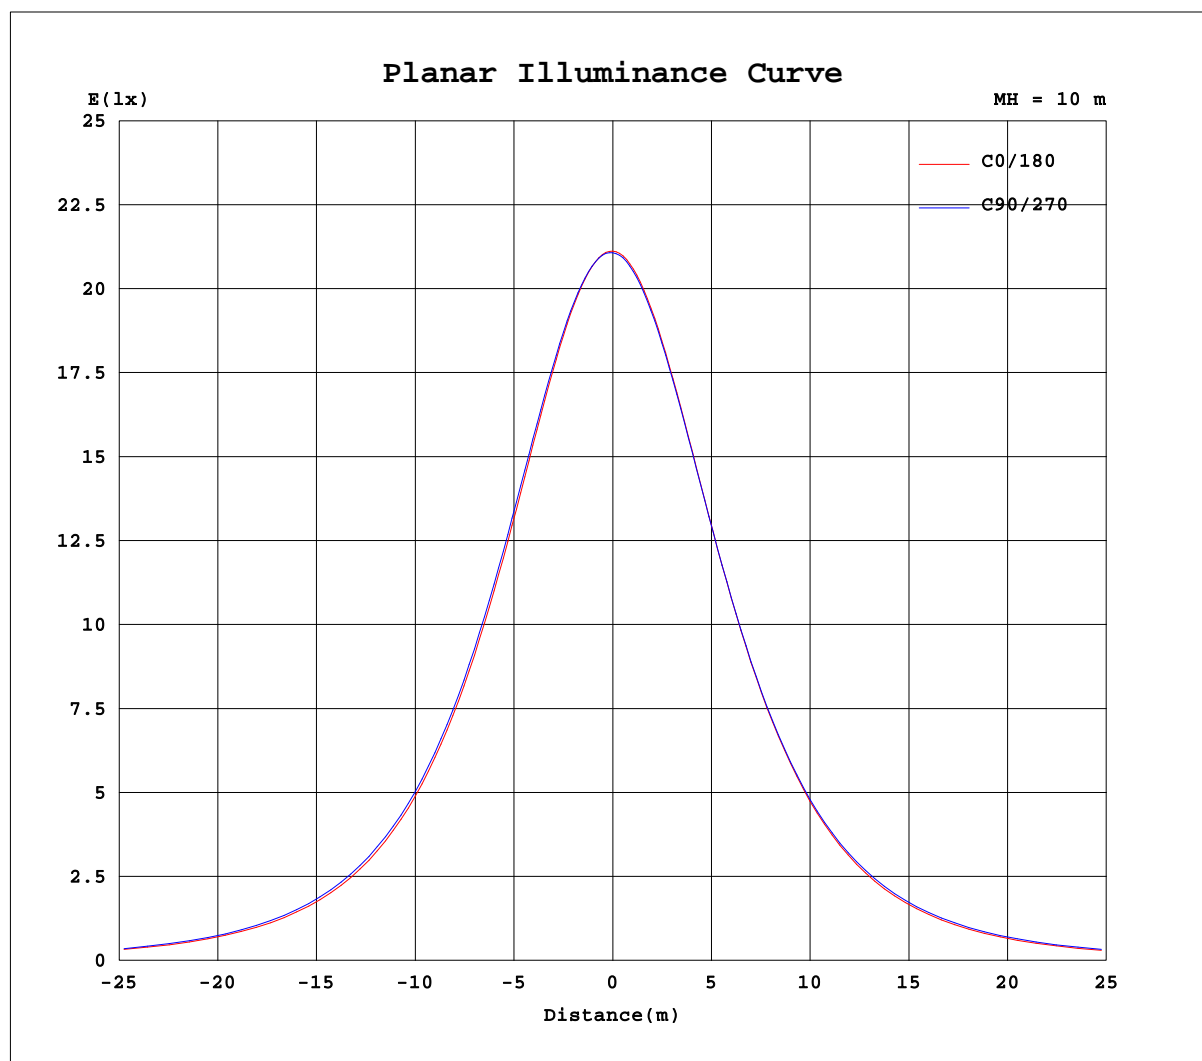

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.4080A P:49.00W PF:0.9930 Lamp Flux:5951.08x1 lm					
NAME: 二代线条灯			TYPE:白色外壳		WEIGHT:
DIM.: 4FT			SPEC.:3000K		SERIAL No.:认证样品
MFR.: YQ			SUR.:		PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2112	2110	2109	2108	2108	2108	2112	2110	2109	2108	2108	2108						
5	2105	2105	2105	2105	2103	2102	2099	2095	2093	2092	2093	2092						
10	2076	2078	2081	2082	2078	2075	2063	2058	2057	2056	2057	2055						
15	2027	2031	2037	2039	2034	2029	2008	2002	2002	2001	2003	2000						
20	1958	1965	1973	1978	1970	1963	1934	1928	1929	1929	1932	1926						
25	1871	1881	1892	1899	1889	1880	1843	1837	1840	1841	1844	1836						
30	1770	1781	1795	1802	1792	1781	1737	1731	1736	1738	1741	1731						
35	1656	1668	1682	1690	1678	1668	1617	1612	1620	1622	1625	1612						
40	1528	1542	1555	1563	1552	1542	1488	1483	1493	1496	1499	1484						
45	1386	1405	1416	1426	1413	1406	1342	1342	1356	1358	1363	1345						
50	1232	1251	1268	1278	1265	1254	1184	1188	1208	1212	1215	1194						
55	1073	1089	1112	1118	1108	1092	1022	1028	1056	1059	1063	1035						
60	907	922	947	954	945	925	856	863	895	900	905	871						
65	740	753	775	787	776	756	686	696	729	739	743	704						
70	570	582	600	617	603	584	517	527	563	577	577	535						
75	402	413	427	448	429	414	351	360	399	414	413	369						
80	239	251	264	286	263	252	192	202	241	261	255	212						
85	87.4	94.9	114	134	113	96.5	44.7	56.9	90.2	115	106	63.8						
90	7.22	6.36	4.55	5.93	3.66	6.07	0.45	0.64	1.24	1.24	2.26	0.75						
95	0.34	0.33	0.34	0.30	0.32	0.30	0.41	0.52	0.54	0.43	0.53	0.56						
100	0.34	0.33	0.34	0.32	0.32	0.31	0.40	0.48	0.49	0.42	0.48	0.51						
105	0.35	0.35	0.37	0.35	0.36	0.34	0.40	0.46	0.48	0.43	0.47	0.49						
110	0.38	0.39	0.40	0.39	0.40	0.38	0.41	0.46	0.47	0.46	0.46	0.49						
115	0.41	0.43	0.45	0.44	0.44	0.42	0.44	0.48	0.51	0.49	0.50	0.50						
120	0.45	0.48	0.49	0.50	0.49	0.47	0.48	0.51	0.55	0.53	0.53	0.53						
125	0.50	0.52	0.54	0.54	0.53	0.51	0.54	0.56	0.60	0.58	0.58	0.58						
130	0.55	0.56	0.57	0.59	0.57	0.56	0.59	0.61	0.63	0.63	0.60	0.62						
135	0.59	0.60	0.61	0.63	0.61	0.60	0.65	0.65	0.67	0.67	0.64	0.66						
140	0.62	0.64	0.64	0.67	0.64	0.63	0.67	0.68	0.69	0.71	0.68	0.68						
145	0.66	0.68	0.68	0.71	0.68	0.67	0.70	0.71	0.72	0.74	0.71	0.70						
150	0.71	0.73	0.72	0.75	0.73	0.71	0.74	0.74	0.76	0.78	0.75	0.75						
155	0.76	0.78	0.77	0.79	0.78	0.76	0.78	0.78	0.80	0.82	0.80	0.79						
160	0.85	0.86	0.84	0.85	0.85	0.84	0.88	0.84	0.87	0.89	0.87	0.88						
165	0.92	0.95	0.91	0.92	0.92	0.92	0.97	0.91	0.93	0.95	0.94	0.97						
170	1.01	1.04	0.98	0.99	0.99	1.03	1.06	0.99	0.97	0.99	1.00	1.03						
175	1.01	1.03	0.99	0.99	1.01	1.04	1.02	0.98	0.96	0.97	0.96	0.98						
180	0.99	0.98	0.96	0.97	0.98	1.00	0.99	0.98	0.96	0.97	0.98	1.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+