


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm					
NAME: 二代线条灯		TYPE: 白色外壳		WEIGHT:	
DIM.: 4FT		SPEC.: 3500K		SERIAL No.: 认证样品	
MFR.: YQ		SUR.:		PROTECTION ANGLE:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.24 lm/W			
MODEL		I _{max} (cd)	2210	S/MH(C0/180)	1.25
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	6234.0	η UP,DN(C0-180)	0.0,51.1
NOMINAL FLUX(lm)	6233.99	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

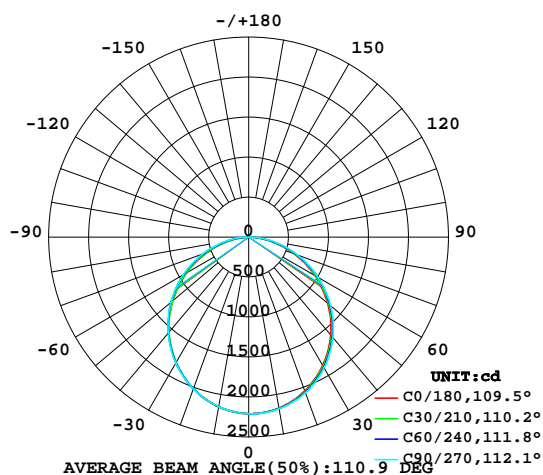

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

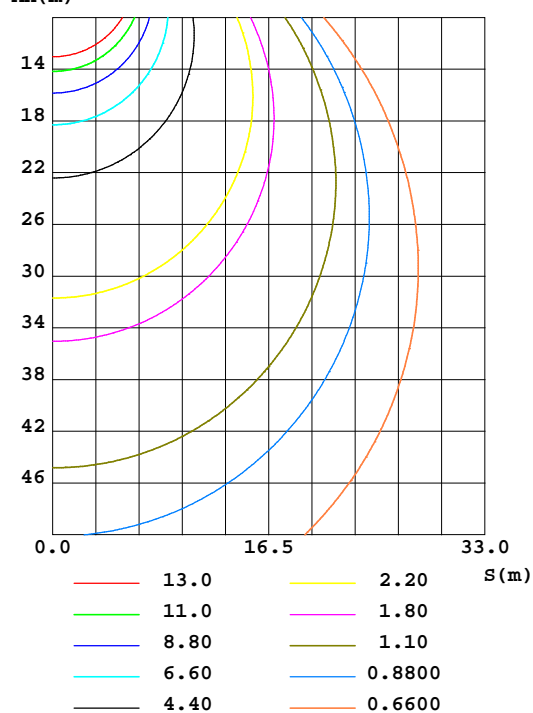


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	2171	2176	2180	2176	2158	2154	2153	2155	0- 10	208.8	208.8	3.35,3.35
20	2047	2061	2072	2061	2022	2018	2021	2022	10- 20	596.1	804.8	12.9,12.9
30	1852	1872	1888	1872	1816	1814	1821	1819	20- 30	898.8	1704	27.3,27.3
40	1599	1621	1637	1622	1556	1557	1567	1564	30- 40	1078	2782	44.6,44.6
50	1291	1320	1338	1321	1240	1256	1270	1264	40- 50	1114	3896	62.5,62.5
60	949.1	978.8	1000	980.0	895.5	920.3	944.1	931.4	50- 60	1003	4899	78.6,78.6
70	596.6	619.5	646.3	622.1	541.6	570.4	605.4	584.1	60- 70	767.3	5667	90.9,90.9
80	250.2	268.4	299.2	270.0	200.5	231.9	274.3	244.9	70- 80	447.1	6114	98.1,98.1
90	7.372	5.725	6.113	5.091	0.4681	0.9954	1.348	1.601	80- 90	116.5	6230	99.9,99.9
100	0.3517	0.3488	0.3288	0.3345	0.4148	0.5075	0.4438	0.5199	90-100	0.6722	6231	99.9,99.9
110	0.3936	0.4157	0.4129	0.4052	0.4320	0.4864	0.4817	0.5007	100-110	0.4495	6231	100,100
120	0.4777	0.5065	0.5199	0.5007	0.5066	0.5609	0.5599	0.5629	110-120	0.4794	6232	100,100
130	0.5714	0.5963	0.6194	0.5906	0.6232	0.6546	0.6612	0.6412	120-130	0.5149	6232	100,100
140	0.6517	0.6718	0.7015	0.6689	0.7053	0.7206	0.7472	0.7148	130-140	0.5109	6233	100,100
150	0.7395	0.7597	0.7856	0.7540	0.7722	0.7875	0.8179	0.7846	140-150	0.4583	6233	100,100
160	0.8847	0.8926	0.8927	0.8801	0.9235	0.8936	0.9269	0.9203	150-160	0.3817	6234	100,100
170	1.051	1.060	1.034	1.065	1.103	1.038	1.042	1.069	160-170	0.2758	6234	100,100
180	1.040	1.016	1.015	1.039	1.038	1.015	1.013	1.038	170-180	0.1005	6234	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

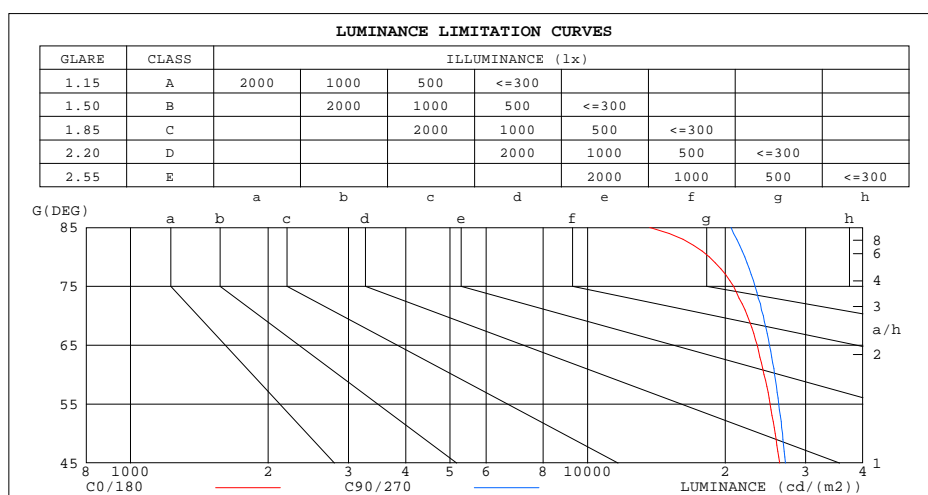

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	13679	20591
80	18472	22092
75	20851	23235
70	22364	24227
65	23495	25018
60	24336	25648
55	25080	26182
50	25743	26697
45	26303	27087


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

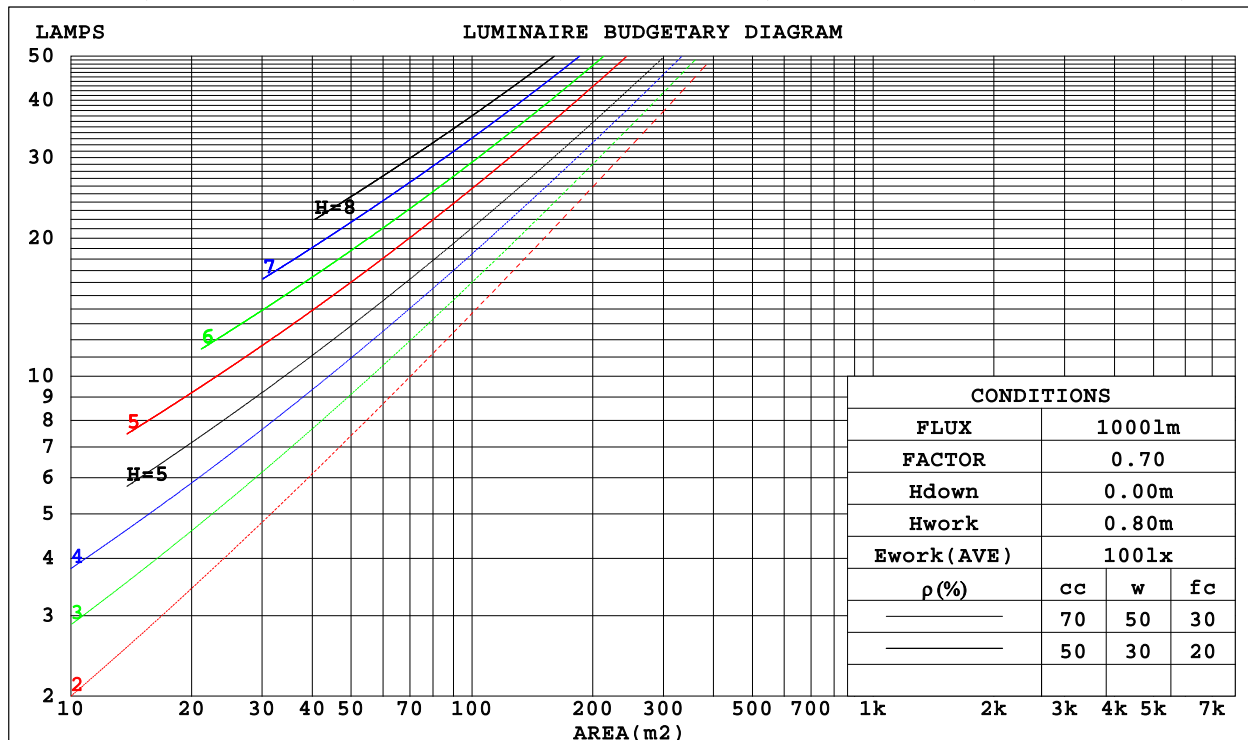

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

WEC AND CCEC

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Uncorrected UGR Table

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:3500K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.6	24.4	25.9	26.1	24.3	25.9	24.6	26.1	26.3	
	3H	25.6	27.1	25.9	27.3	27.5	25.9	27.3	26.2	27.6	27.8
	4H	26.3	27.6	26.6	27.8	28.1	26.6	27.9	26.9	28.2	28.5
	6H	26.7	28.0	27.0	28.2	28.5	27.1	28.4	27.5	28.7	28.9
	8H	26.8	28.0	27.2	28.3	28.6	27.3	28.5	27.6	28.8	29.1
	12H	26.9	28.0	27.2	28.3	28.7	27.4	28.6	27.8	28.9	29.2
4H	2H	24.8	26.1	25.1	26.4	26.6	24.9	26.3	25.2	26.5	26.8
	3H	26.5	27.7	26.8	27.9	28.3	26.7	27.9	27.1	28.2	28.5
	4H	27.2	28.3	27.6	28.6	28.9	27.5	28.6	27.9	28.9	29.2
	6H	27.8	28.7	28.2	29.1	29.5	28.2	29.1	28.6	29.5	29.8
	8H	28.0	28.8	28.4	29.2	29.6	28.4	29.3	28.8	29.7	30.0
	12H	28.1	28.9	28.5	29.3	29.7	28.6	29.4	29.0	29.8	30.2
8H	4H	27.5	28.4	27.9	28.8	29.2	27.8	28.7	28.2	29.0	29.4
	6H	28.2	29.0	28.7	29.4	29.8	28.6	29.3	29.0	29.7	30.2
	8H	28.5	29.1	29.0	29.6	30.0	28.9	29.6	29.4	30.0	30.4
	12H	28.7	29.2	29.1	29.7	30.1	29.2	29.7	29.6	30.2	30.7
12H	4H	27.5	28.4	28.0	28.7	29.1	27.8	28.6	28.2	29.0	29.4
	6H	28.3	29.0	28.8	29.4	29.8	28.6	29.3	29.1	29.7	30.2
	8H	28.6	29.2	29.1	29.6	30.1	29.0	29.6	29.5	30.0	30.5
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 6234 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.4)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

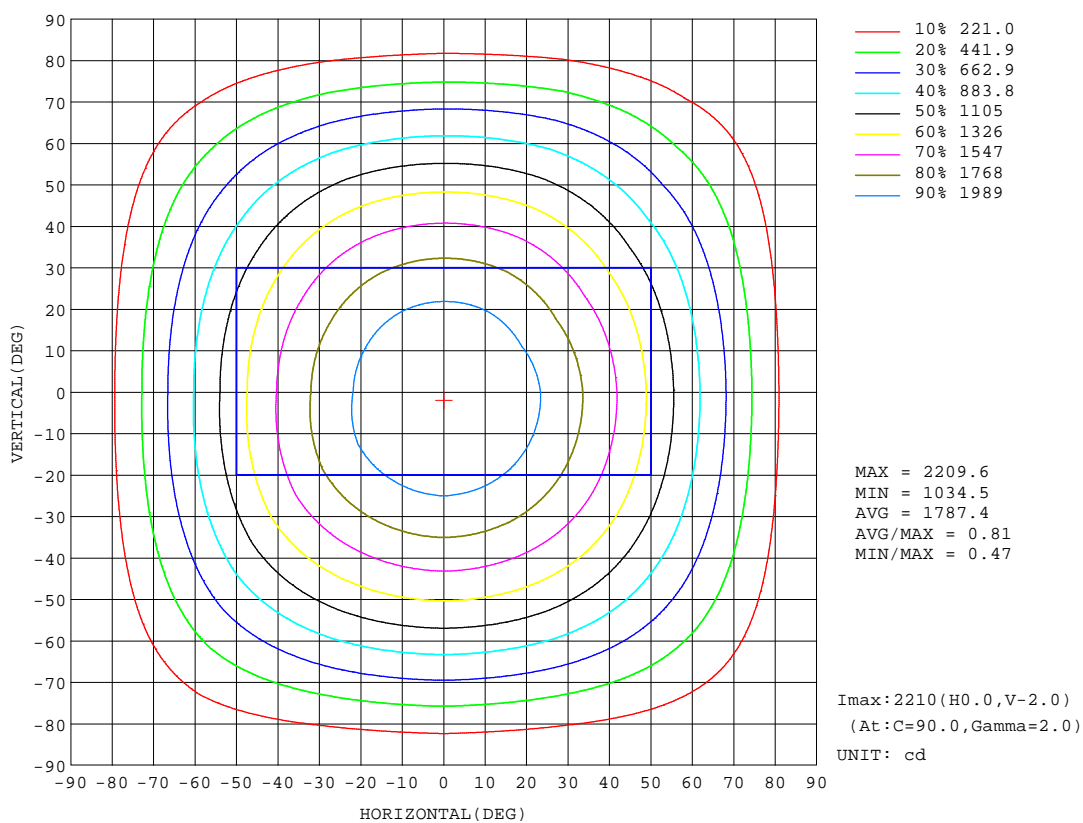


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

AAI Figure

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

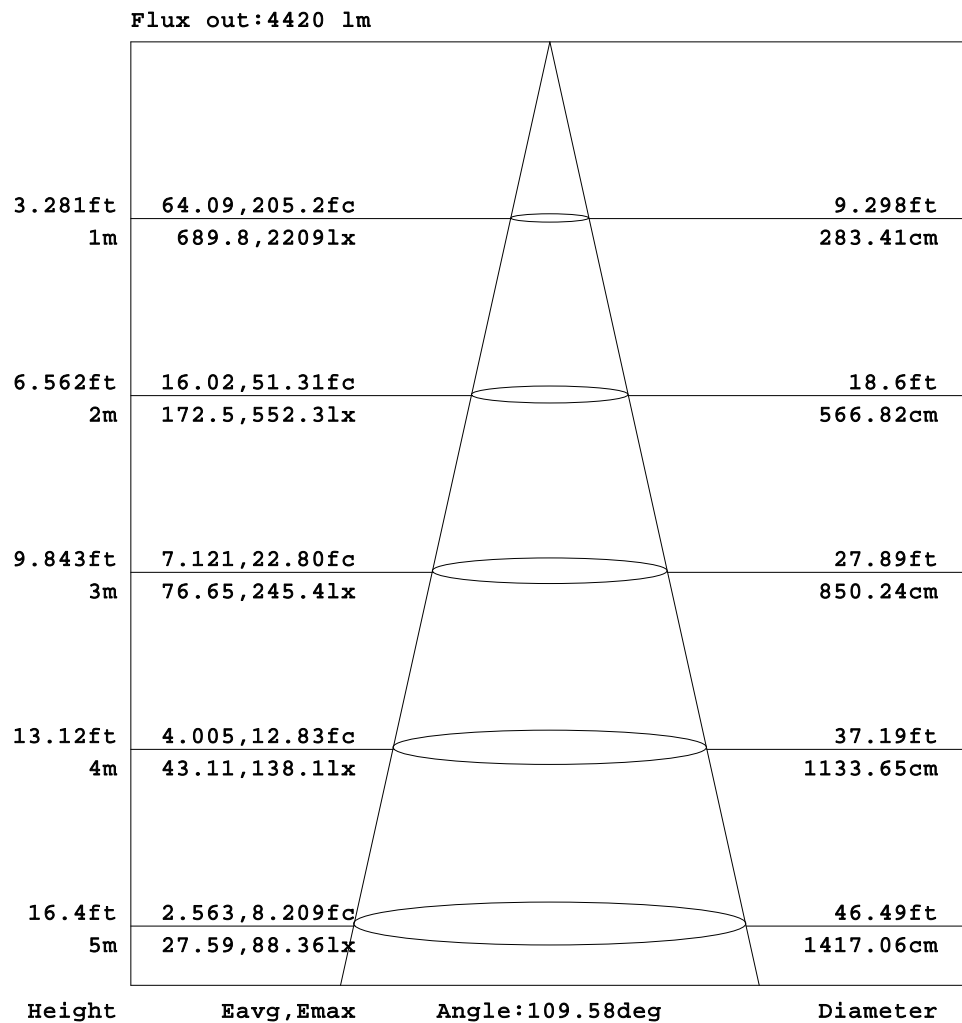


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ISOLUX DIAGRAM


Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE: 白色外壳	WEIGHT:
DIM.: 4FT	SPEC.: 3500K	SERIAL No.: 认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

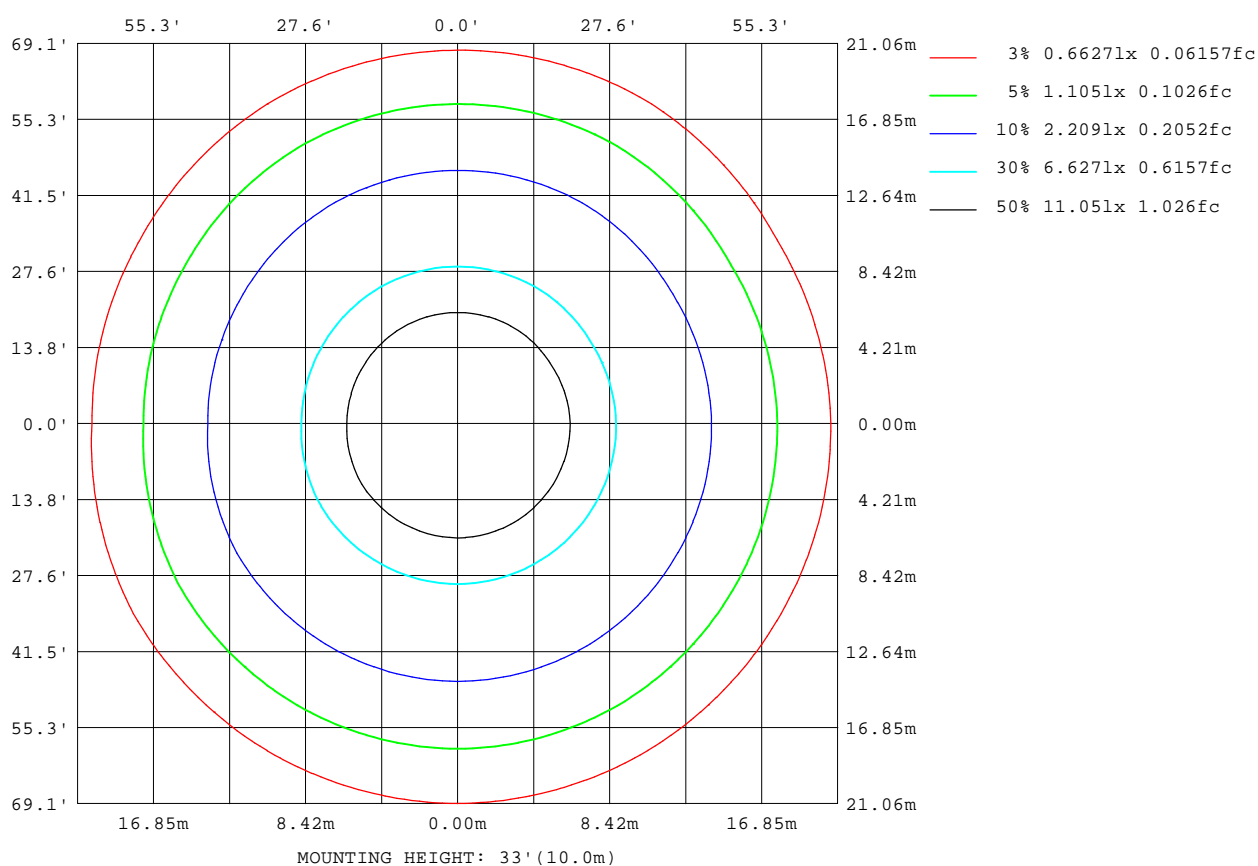

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

Planar Illuminance Curve

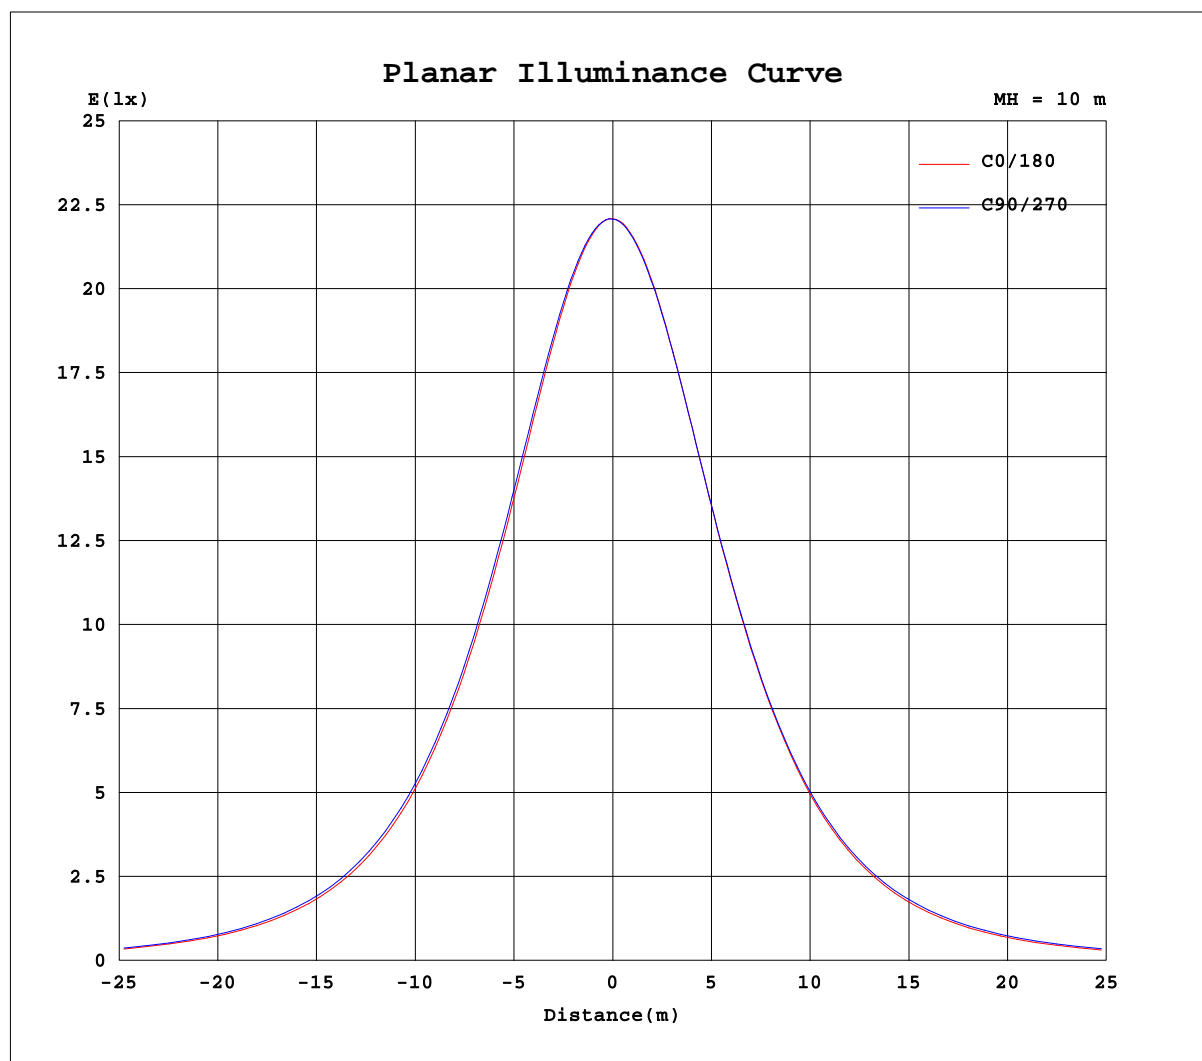

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.3950A P:47.50W PF:0.9930 Lamp Flux:6233.99x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2209	2209	2208	2208	2208	2209	2209	2209	2208	2208	2208	2209						
5	2201	2202	2204	2205	2203	2203	2194	2192	2191	2191	2193	2193						
10	2171	2175	2178	2180	2177	2176	2158	2153	2154	2153	2155	2155						
15	2120	2126	2132	2136	2131	2127	2100	2095	2096	2096	2099	2096						
20	2047	2057	2066	2072	2064	2058	2022	2017	2020	2021	2024	2019						
25	1957	1968	1980	1989	1979	1971	1927	1922	1927	1929	1932	1925						
30	1852	1864	1879	1888	1877	1867	1816	1811	1818	1821	1824	1815						
35	1732	1746	1760	1770	1759	1749	1692	1687	1696	1700	1703	1691						
40	1599	1614	1628	1637	1626	1617	1556	1552	1563	1567	1571	1556						
45	1451	1471	1484	1494	1481	1475	1404	1404	1419	1424	1428	1411						
50	1291	1312	1328	1338	1325	1318	1240	1243	1269	1270	1276	1252						
55	1122	1140	1164	1171	1162	1146	1070	1076	1105	1110	1114	1086						
60	949	966	992	1000	990	970	895	903	937	944	949	914						
65	775	789	812	825	814	793	718	728	764	776	779	738						
70	597	609	629	646	632	612	542	551	590	605	605	563						
75	421	432	448	469	449	434	368	377	418	435	433	387						
80	250	263	274	299	276	264	200	211	252	274	268	222						
85	93.0	99.9	118	140	118	101	46.7	57.2	94.7	121	112	67.1						
90	7.37	6.70	4.75	6.11	3.83	6.35	0.47	0.67	1.32	1.35	2.41	0.79						
95	0.36	0.33	0.35	0.34	0.33	0.32	0.43	0.55	0.58	0.45	0.56	0.59						
100	0.35	0.34	0.36	0.33	0.34	0.33	0.41	0.50	0.51	0.44	0.50	0.54						
105	0.37	0.37	0.39	0.36	0.37	0.35	0.42	0.48	0.49	0.45	0.50	0.51						
110	0.39	0.41	0.42	0.41	0.41	0.40	0.43	0.48	0.49	0.48	0.49	0.51						
115	0.43	0.45	0.47	0.46	0.46	0.44	0.46	0.50	0.54	0.51	0.53	0.52						
120	0.48	0.50	0.51	0.52	0.51	0.49	0.51	0.54	0.58	0.56	0.56	0.56						
125	0.53	0.55	0.56	0.57	0.56	0.54	0.56	0.59	0.63	0.61	0.60	0.61						
130	0.57	0.59	0.60	0.62	0.60	0.58	0.62	0.64	0.67	0.66	0.63	0.65						
135	0.62	0.63	0.64	0.67	0.63	0.62	0.68	0.68	0.70	0.71	0.67	0.69						
140	0.65	0.67	0.67	0.70	0.67	0.66	0.71	0.71	0.73	0.75	0.71	0.72						
145	0.69	0.71	0.71	0.74	0.71	0.70	0.73	0.74	0.75	0.77	0.75	0.74						
150	0.74	0.76	0.76	0.79	0.76	0.75	0.77	0.78	0.80	0.82	0.79	0.78						
155	0.79	0.81	0.81	0.83	0.82	0.79	0.82	0.82	0.84	0.86	0.84	0.83						
160	0.88	0.90	0.88	0.89	0.88	0.88	0.92	0.88	0.91	0.93	0.92	0.92						
165	0.96	1.00	0.96	0.96	0.96	0.97	1.01	0.96	0.98	0.99	0.99	1.02						
170	1.05	1.09	1.03	1.03	1.04	1.09	1.10	1.04	1.03	1.04	1.05	1.09						
175	1.05	1.08	1.04	1.04	1.06	1.10	1.07	1.03	1.01	1.01	1.01	1.04						
180	1.04	1.02	1.01	1.01	1.03	1.05	1.04	1.02	1.01	1.01	1.03	1.05						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+