


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.54 lm/W			
MODEL		I _{max} (cd)	2153	S/MH(C0/180)	1.25
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	6075.9	η UP,DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	6075.92	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

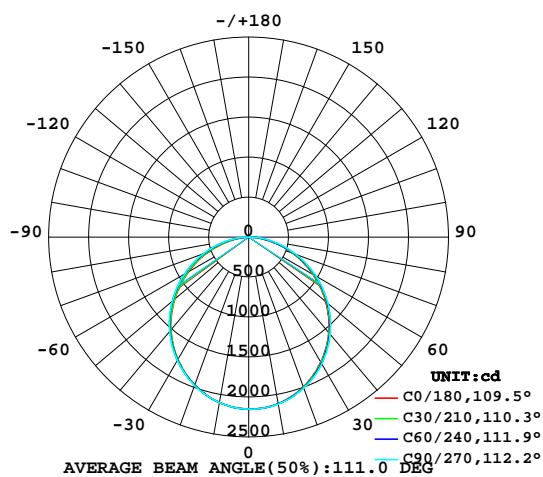

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

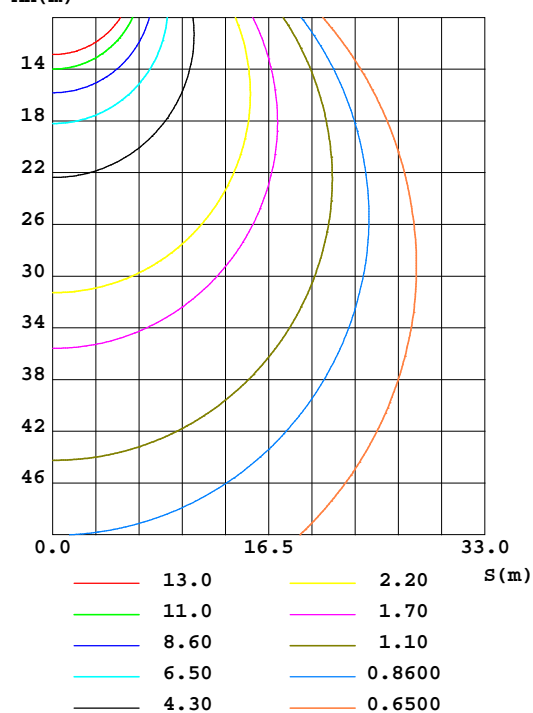


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	2115	2118	2121	2118	2102	2101	2102	2102	0- 10	203.4	203.4	3.35,3.35
20	1996	2003	2011	2003	1971	1972	1977	1975	10- 20	580.8	784.2	12.9,12.9
30	1805	1818	1830	1818	1770	1775	1785	1780	20- 30	875.8	1660	27.3,27.3
40	1559	1573	1585	1572	1516	1525	1538	1531	30- 40	1051	2711	44.6,44.6
50	1258	1280	1295	1281	1208	1230	1248	1238	40- 50	1086	3797	62.5,62.5
60	925.7	948.6	967.0	949.8	872.5	902.1	928.2	913.3	50- 60	977.7	4774	78.6,78.6
70	582.6	600.4	625.8	603.5	527.8	559.7	595.2	572.2	60- 70	748.0	5522	90.9,90.9
80	244.7	261.3	291.2	262.3	195.4	227.4	269.2	239.9	70- 80	436.0	5958	98.1,98.1
90	7.126	5.589	6.435	5.027	0.4566	0.9286	1.204	1.502	80- 90	113.9	6072	99.9,99.9
100	0.3402	0.3478	0.3326	0.3287	0.4033	0.4874	0.4243	0.5003	90-100	0.6545	6073	99.9,99.9
110	0.3822	0.4109	0.4110	0.4023	0.4243	0.4702	0.4625	0.4820	100-110	0.4387	6073	100,100
120	0.4662	0.5017	0.5161	0.4950	0.4989	0.5399	0.5370	0.5418	110-120	0.4678	6074	100,100
130	0.5580	0.5906	0.6117	0.5848	0.6098	0.6307	0.6363	0.6202	120-130	0.5025	6074	100,100
140	0.6363	0.6603	0.6920	0.6584	0.6881	0.6985	0.7205	0.6926	130-140	0.4987	6075	100,100
150	0.7243	0.7463	0.7741	0.7416	0.7532	0.7636	0.7931	0.7636	140-150	0.4475	6075	100,100
160	0.8694	0.8735	0.8774	0.8620	0.9044	0.8706	0.9001	0.8906	150-160	0.3730	6076	100,100
170	1.034	1.039	1.011	1.036	1.082	1.016	1.008	1.037	160-170	0.2694	6076	100,100
180	1.021	0.9919	0.9900	1.010	1.019	0.9948	0.9919	1.010	170-180	0.0981	6076	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

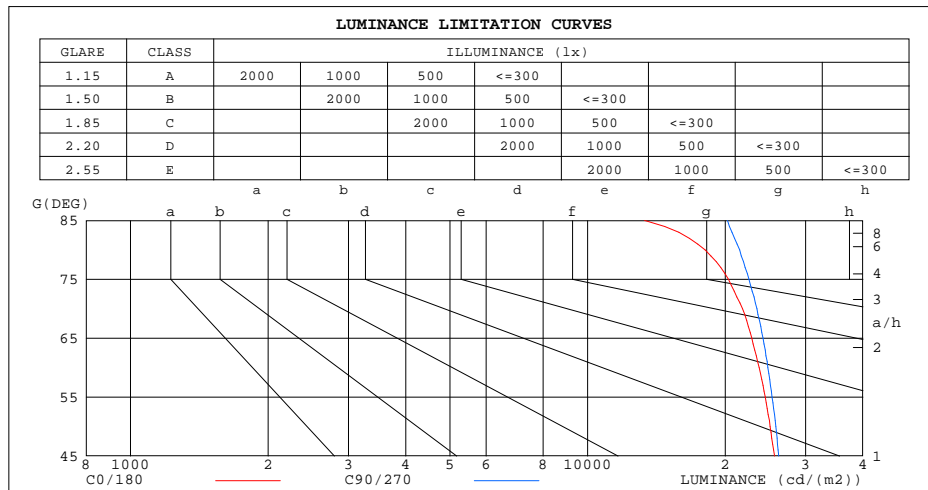

LUMINANCE cd/(m ²)		
G(°)	C0/180	C90/270
85	13320	20236
80	18068	21501
75	20321	22531
70	21840	23459
65	22859	24202
60	23735	24796
55	24481	25328
50	25099	25835
45	25649	26207


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

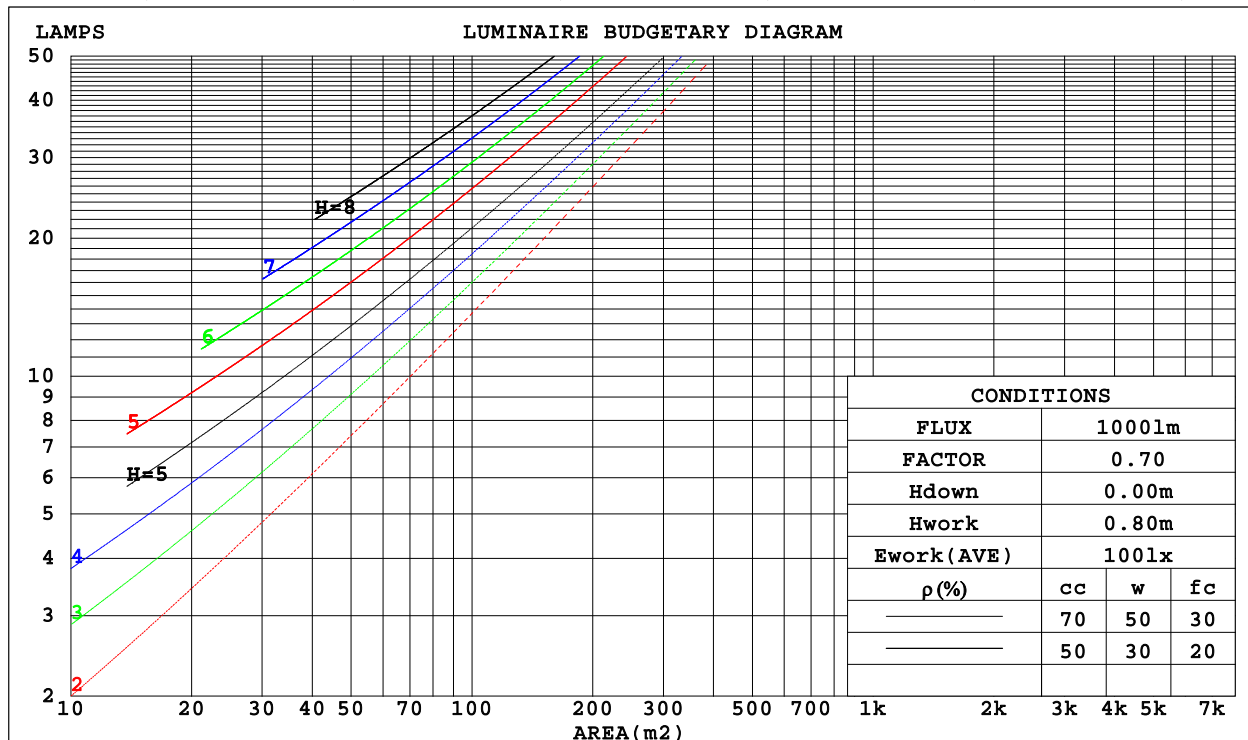

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

WEC AND CCEC

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.049	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Uncorrected UGR Table

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:4000K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.5	24.3	25.7	26.0	24.2	25.7	24.5	25.9	26.1	
	3H	25.5	27.0	25.8	27.2	27.4	25.8	27.2	26.1	27.4	27.7
	4H	26.2	27.5	26.5	27.7	28.0	26.5	27.8	26.8	28.1	28.3
	6H	26.6	27.9	26.9	28.1	28.4	27.0	28.2	27.3	28.5	28.8
	8H	26.7	27.9	27.1	28.2	28.5	27.2	28.4	27.5	28.7	29.0
	12H	26.8	28.0	27.1	28.2	28.6	27.3	28.5	27.7	28.8	29.1
4H	2H	24.7	26.0	25.0	26.3	26.5	24.8	26.1	25.1	26.4	26.6
	3H	26.4	27.5	26.7	27.8	28.1	26.6	27.8	26.9	28.1	28.4
	4H	27.1	28.2	27.5	28.5	28.8	27.4	28.5	27.8	28.8	29.1
	6H	27.7	28.6	28.1	29.0	29.3	28.0	29.0	28.4	29.3	29.7
	8H	27.9	28.7	28.3	29.1	29.5	28.3	29.2	28.7	29.5	29.9
	12H	28.0	28.8	28.4	29.2	29.6	28.5	29.3	28.9	29.7	30.1
8H	4H	27.4	28.3	27.8	28.7	29.1	27.6	28.5	28.1	28.9	29.3
	6H	28.1	28.9	28.6	29.3	29.7	28.4	29.2	28.9	29.6	30.0
	8H	28.4	29.0	28.8	29.5	29.9	28.8	29.4	29.2	29.9	30.3
	12H	28.6	29.1	29.0	29.6	30.0	29.1	29.6	29.5	30.1	30.5
12H	4H	27.4	28.2	27.9	28.6	29.0	27.7	28.5	28.1	28.9	29.3
	6H	28.2	28.8	28.7	29.3	29.7	28.5	29.2	29.0	29.6	30.0
	8H	28.5	29.1	29.0	29.5	30.0	28.9	29.4	29.4	29.9	30.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 6076 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.3)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

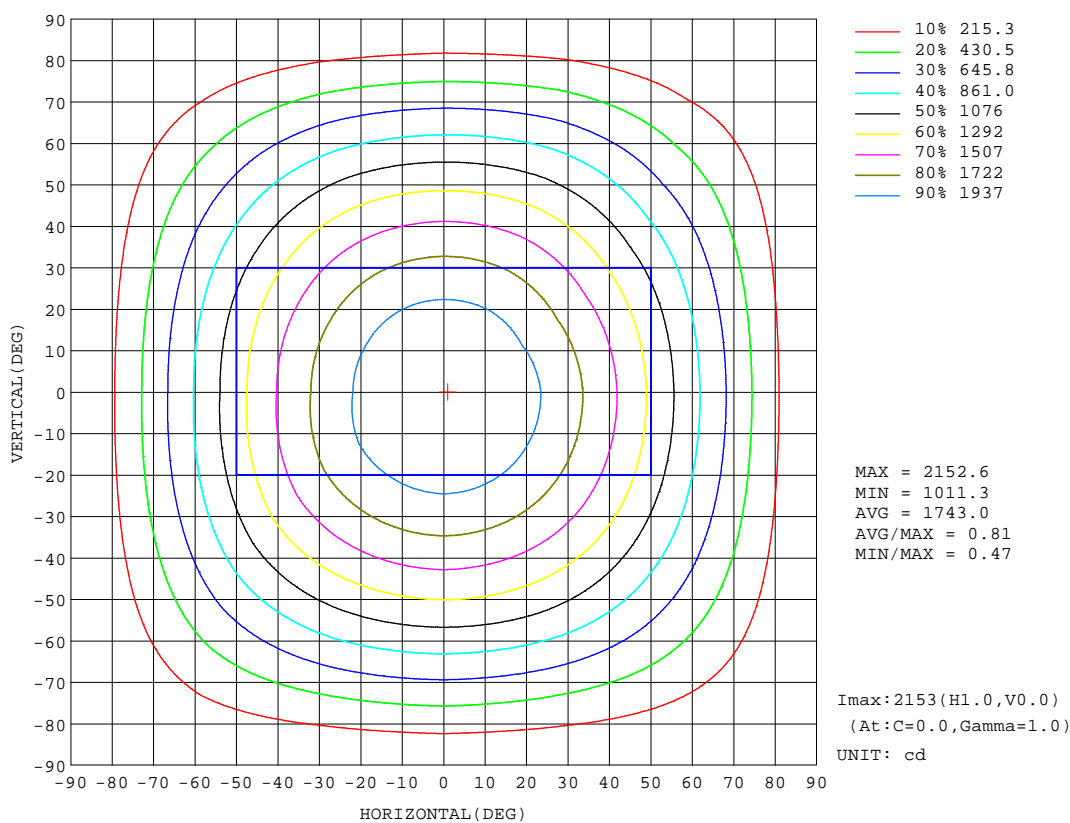


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

AAI Figure

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Flux out:4307 lm

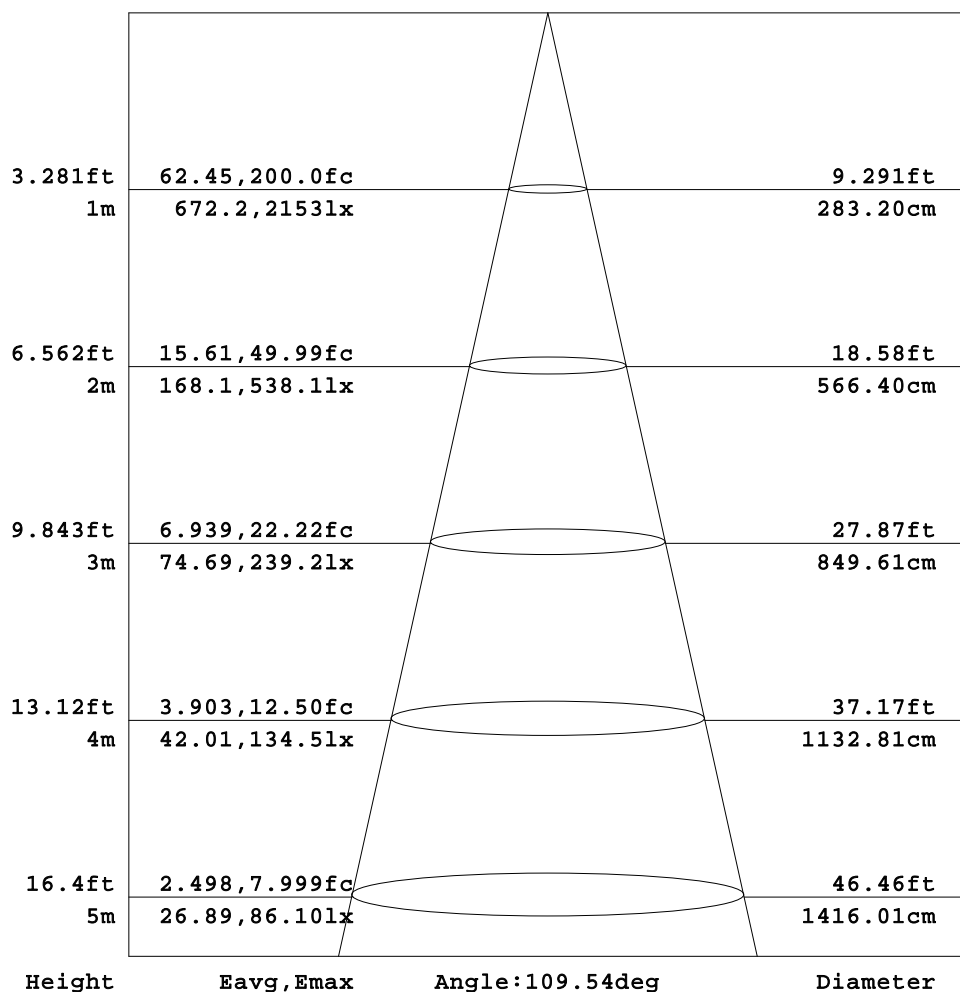


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ISOLUX DIAGRAM


Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

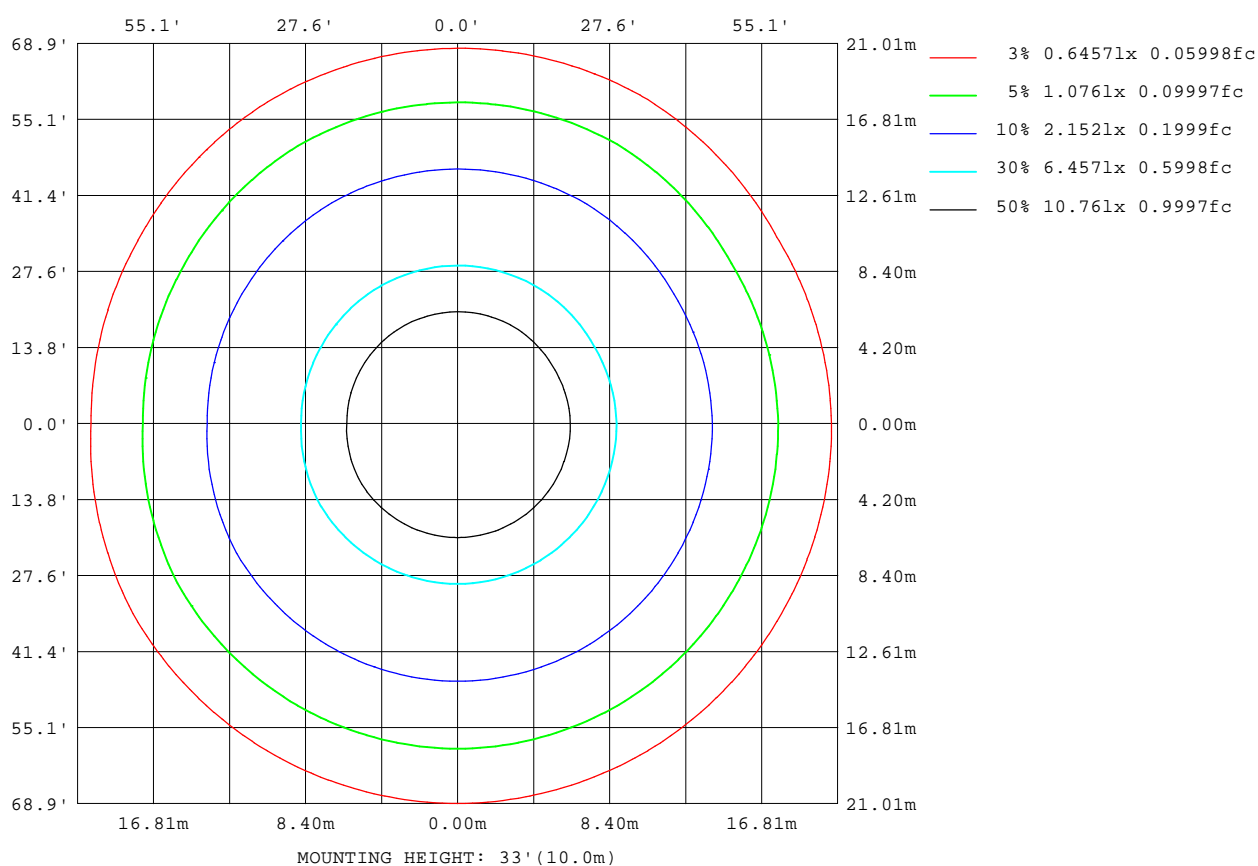

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

Planar Illuminance Curve

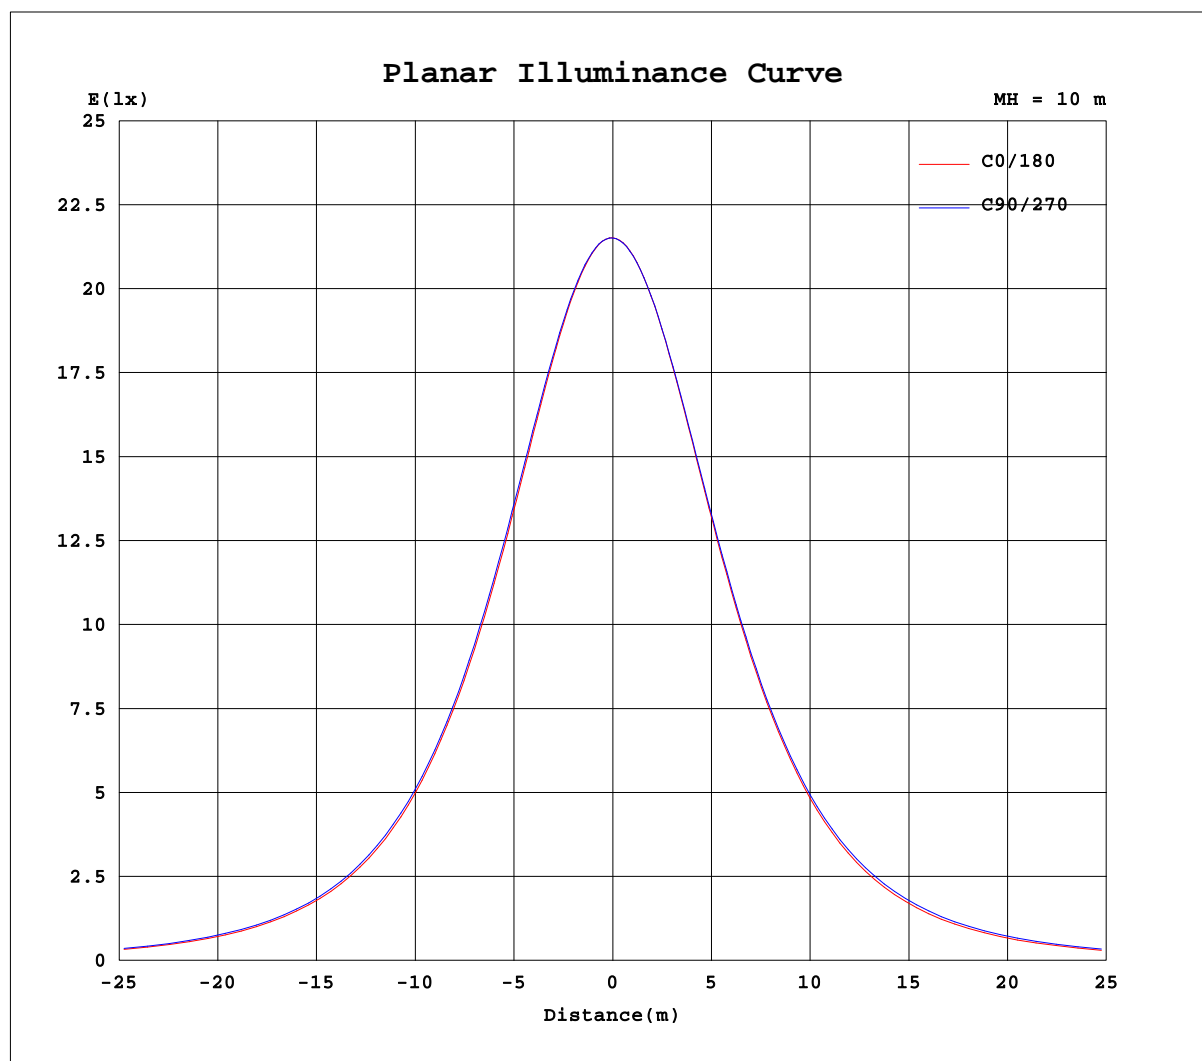

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.4030A P:48.40W PF:0.9920 Lamp Flux:6075.92x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2152	2151	2152	2152	2153	2151	2152	2151	2152	2152	2153	2151						
5	2145	2145	2146	2146	2145	2145	2138	2136	2137	2137	2138	2137						
10	2115	2117	2119	2121	2118	2117	2102	2101	2102	2102	2104	2101						
15	2065	2068	2072	2075	2071	2068	2046	2044	2047	2048	2051	2045						
20	1996	2000	2007	2011	2005	2001	1971	1968	1975	1977	1979	1971						
25	1908	1914	1923	1929	1920	1916	1878	1877	1884	1888	1890	1880						
30	1805	1812	1823	1830	1821	1814	1770	1770	1780	1785	1786	1773						
35	1688	1696	1707	1715	1705	1698	1649	1649	1661	1667	1669	1653						
40	1559	1568	1578	1585	1575	1570	1516	1517	1532	1538	1540	1522						
45	1415	1429	1437	1445	1434	1431	1368	1374	1392	1398	1401	1381						
50	1258	1274	1286	1295	1283	1279	1208	1217	1243	1248	1251	1225						
55	1095	1107	1128	1133	1124	1112	1043	1053	1085	1091	1094	1062						
60	926	937	960	967	958	941	872	884	920	928	932	894						
65	754	765	786	798	788	769	700	713	750	762	765	723						
70	583	592	609	626	612	595	528	540	580	595	595	550						
75	410	420	432	455	436	422	358	370	410	427	425	379						
80	245	255	267	291	268	257	195	207	248	269	263	217						
85	90.6	96.8	117	138	115	98.8	45.6	58.3	92.5	118	109	65.0						
90	7.13	6.50	4.68	6.44	3.79	6.26	0.46	0.65	1.21	1.20	2.26	0.75						
95	0.35	0.34	0.35	0.35	0.33	0.32	0.41	0.52	0.54	0.43	0.53	0.56						
100	0.34	0.34	0.36	0.33	0.34	0.32	0.40	0.48	0.49	0.42	0.49	0.51						
105	0.35	0.37	0.38	0.36	0.37	0.35	0.41	0.47	0.49	0.44	0.47	0.50						
110	0.38	0.40	0.42	0.41	0.41	0.39	0.42	0.46	0.48	0.46	0.47	0.49						
115	0.42	0.44	0.47	0.46	0.46	0.43	0.45	0.48	0.52	0.49	0.51	0.50						
120	0.47	0.49	0.51	0.52	0.51	0.48	0.50	0.52	0.56	0.54	0.54	0.54						
125	0.51	0.54	0.55	0.57	0.55	0.53	0.55	0.57	0.61	0.59	0.58	0.59						
130	0.56	0.58	0.60	0.61	0.59	0.58	0.61	0.62	0.64	0.64	0.61	0.63						
135	0.60	0.62	0.63	0.66	0.63	0.62	0.67	0.66	0.67	0.68	0.65	0.67						
140	0.64	0.66	0.66	0.69	0.67	0.65	0.69	0.69	0.70	0.72	0.69	0.70						
145	0.67	0.70	0.70	0.73	0.70	0.69	0.71	0.72	0.73	0.75	0.72	0.71						
150	0.72	0.75	0.75	0.77	0.75	0.73	0.75	0.75	0.77	0.79	0.76	0.76						
155	0.78	0.80	0.79	0.81	0.80	0.78	0.81	0.80	0.82	0.84	0.82	0.81						
160	0.87	0.89	0.86	0.88	0.87	0.86	0.90	0.86	0.88	0.90	0.89	0.89						
165	0.95	0.98	0.94	0.94	0.94	0.94	0.99	0.94	0.95	0.96	0.96	0.99						
170	1.03	1.07	1.01	1.01	1.02	1.05	1.08	1.02	1.01	1.01	1.02	1.05						
175	1.04	1.06	1.02	1.02	1.03	1.06	1.05	1.01	0.99	0.99	0.98	1.01						
180	1.02	1.00	0.98	0.99	1.00	1.02	1.02	1.01	0.98	0.99	1.00	1.02						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+