



Date:	
Project Name:	
SKU #:	

**ICON R3™**  
Icon Series Round Downlight 3"



RBT - Round Baffled Trim



RTL - Round Trimless

**APPLICATIONS**

Residential, Commercial, Multi-Family

**FEATURES**

**Construction**

- Aluminum Housing

**Finish**

- White  
- Black Trim [Option]

**Electrical & Technical**

- Input Voltage: 120VAC  
- Input Frequency: 60Hz  
- Projected Life: L70 > 50,000 hrs  
- PF: >0.9  
- CRI: >90  
- THD: <20%  
- CCT Selectable: 2700K/3000K/3500K/  
4000K/5000K  
- Operating Temp.: -4°F ~ 104°F  
- Wet Location Rated  
- IC Air-Tight Rated

**Optical**

- White PC Lens  
- Available Beam Angles:  
- 24°  
- 38°  
- 60°

**Installation/Mounting**

- Spring Clip Mount [W/Trim]  
- Flush to Ceiling [Trimless]

**Controls**

- Triac Dimming

**Compliance**


- JA8 TITLE 24 Compliant

**Lumen Output**

• 3"/10W: 700lm  
• 3"/15W: 1000lm

**Warranty**



- 5 Year Warranty  
See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: ICON-R-3-10-5C-24-RBT-WH**

Series	Size	Wattage	CCT	Beam Angle	Trim Type	Trim Finish	Options
ICON-R	3 - 3"	10 - 10W 15 - 15W	5C - 2700K/3000K/ 3500K/4000K/5000K	24 - 24° 38 - 38° 60 - 60°	RBT - Round Baffled Trim RTL - Round Trimless	BK - Black WH - White	MP-UNV-23354 [New Construction Plate W/ Hanger Bar] FLEX-4 [4' Flexible Connector] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector]


DIMENSIONS

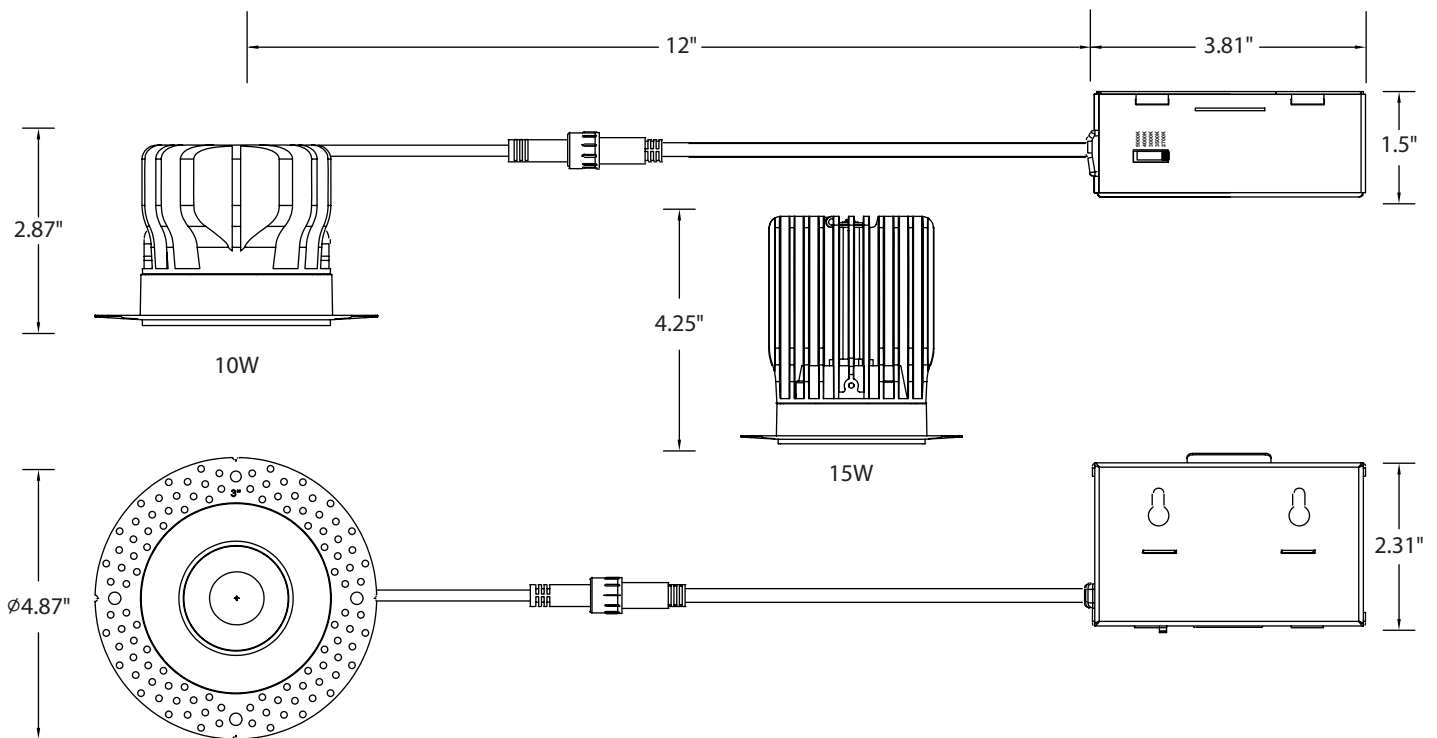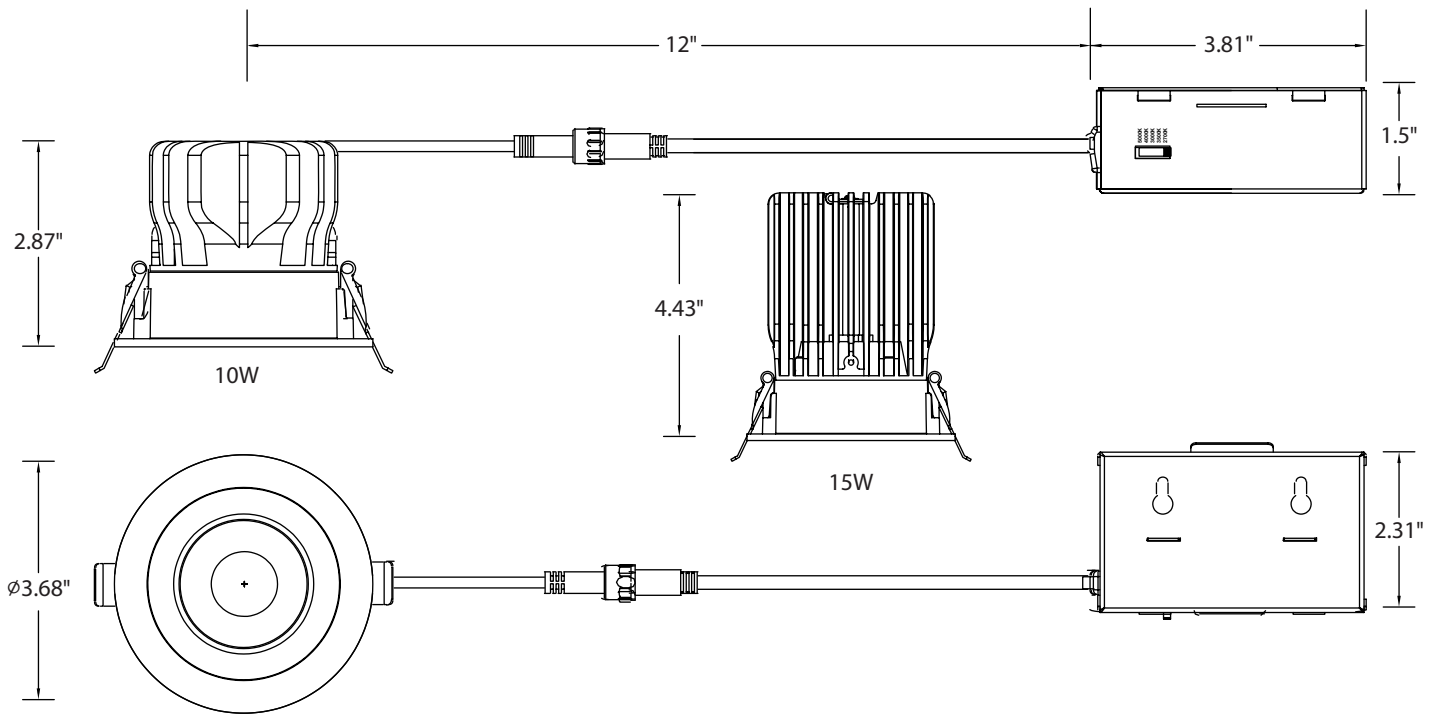


LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-3-10-5C-38-RBT-WH	3	10	700	70
ICON-R-3-15-5C-38-RBT-WH	3	15	1000	66


ACCESSORIES



Baffled Trim [RBT]



Round Trimless [RTL]

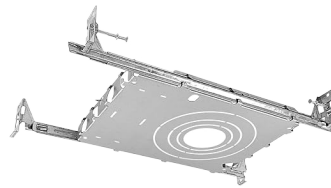

New Construction Kit  
W/ Hanger Bar  
2"/3"/3.5"/4"  
[ICON-R-NC]

COMPLETED PRODUCT



ICON R3™  
Round Baffled Trim



ICON R3™  
Round Trimless