

tgs



SAVED
BY THE BELL

THE IDEAL LIGHTING PRODUCTS FOR YOUR SCHOOL PROJECTS!

SAVED BY THE BELL

THE IDEAL LIGHTING PRODUCTS FOR YOUR SCHOOL PROJECTS!




EXTERIOR

From illuminating pathways and outdoor study areas to enhancing safety and brightening campus grounds, our carefully selected fixtures are designed to meet the unique needs of schools. Focusing on functionality, durability, and aesthetic appeal, our lighting solutions are crafted to enhance the ambiance and ensure safety in every corner of your school's exterior environment.



INTERIOR

We recognize the crucial role lighting plays in fostering conducive learning environments and have carefully curated a selection of high-quality interior lighting fixtures tailored for various educational settings. From classrooms and libraries to hallways, dormitories, study areas, and beyond, our fixtures are designed to enhance the ambiance and functionality of any learning space.



ATHLETICS

Whether brightening gymnasiums, outdoor courts, or expansive stadiums, our thoughtfully selected fixtures guarantee top-notch visibility, minimizing glare and shadows while maximizing energy efficiency. Whether intensifying the clarity of action during matches or crafting an exhilarating atmosphere for spectators, our lighting solutions are prepared to exceed expectations.



WPF™ S

Slim Full Cutoff Wall Pack

Construction

Two-Piece Die-cast Aluminum Housing
3G Vibration Compliant According to ANSI C136.31

Finish

Dark Bronze

Electrical & Technical

Input Voltage: 120-277V
Input Frequency: 50/60Hz
Projected L70 > 50,000 hrs
PF: >0.9
CRI: >70
THD: <20%
3CCT Selectable: 3000K / 4000K / 5000K

Controls Option

Factory Installed Photocell

EM Backup Accessories

8W Emergency Battery Backup



Small



Medium





ALP™ E2

Adjustable Area & Site Light

Construction

Rugged Die-Cast Aluminum Housing

Finish

Dark Bronze or Black

Electrical & Technical

Input Voltage: 120-277V (Standard) or 277-480V (Optional)

Input Frequency: 50/60Hz

Projected L70 > 100,000 hrs

PF: >0.9

CRI: >80

THD: <20%

3CCT Selectable: 3000K / 4000K / 5000K

Controls Option

0-10V Dimming

Bi-Level Occupancy / Daylight Harvesting Sensor

Accessories


Surge Protection



150W



300W

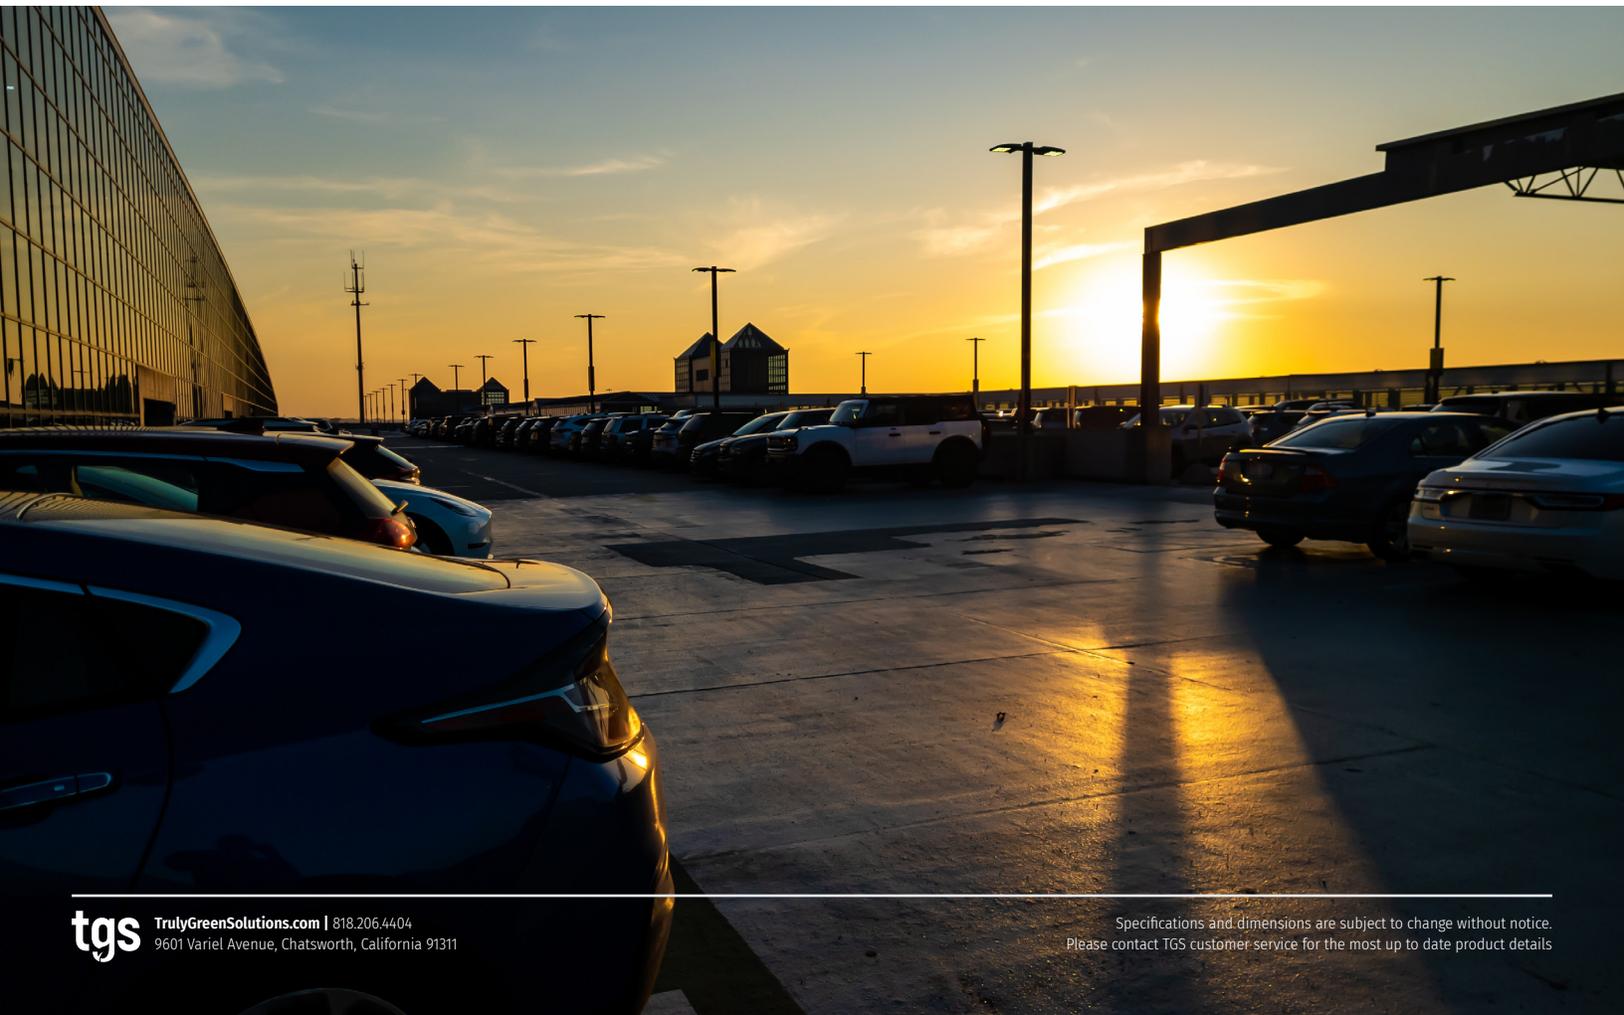



IMPAKT™

Architectural Floodlight

Construction

Rugged Die-Cast Aluminum Housing
IP67 Rated Modular Light Engine

Finish

Brush Nickel (Standard), White, Black, or Bronze

Electrical & Technical

Input Voltage: 120-277V (Standard) or 347-480V (Optional)

Input Frequency: 50/60Hz

Projected L70 > 75,000 hrs

PF: >0.9

CRI: >70

THD: <20%

CCT: 3000K, 4000K, 5000K, or 5700K

Controls Option

0-10V Dimming

Bi-Level Occupancy / Daylight Harvesting Sensor

SYNAPSE™ Wireless Control System

Accessories

Surge Protection



Extra Small / Small



Medium



Large





OUTLINE™

T-Grid Light

Construction

Lightweight Aluminum Frame

Finish

White Lens

Electrical & Technical

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%


CCT Selectable: 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories

8W EM Battery Backup, 15W Inverter

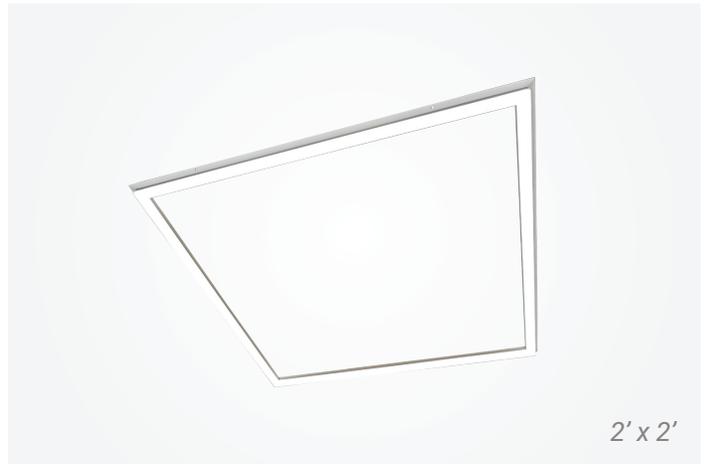

2' x 2'



2' x 4'





CONTOUR™

Field Selectable Architectural Troffer

Construction

Extruded Aluminum Housing
Backlit

Finish

Powder Coated White

Electrical & Technical

Input Voltage: 110-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%

CCT Selectable: 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories

8W EM Battery Backup, 10W & 15W Inverter




2' x 2'



1' x 4'



2' x 4'

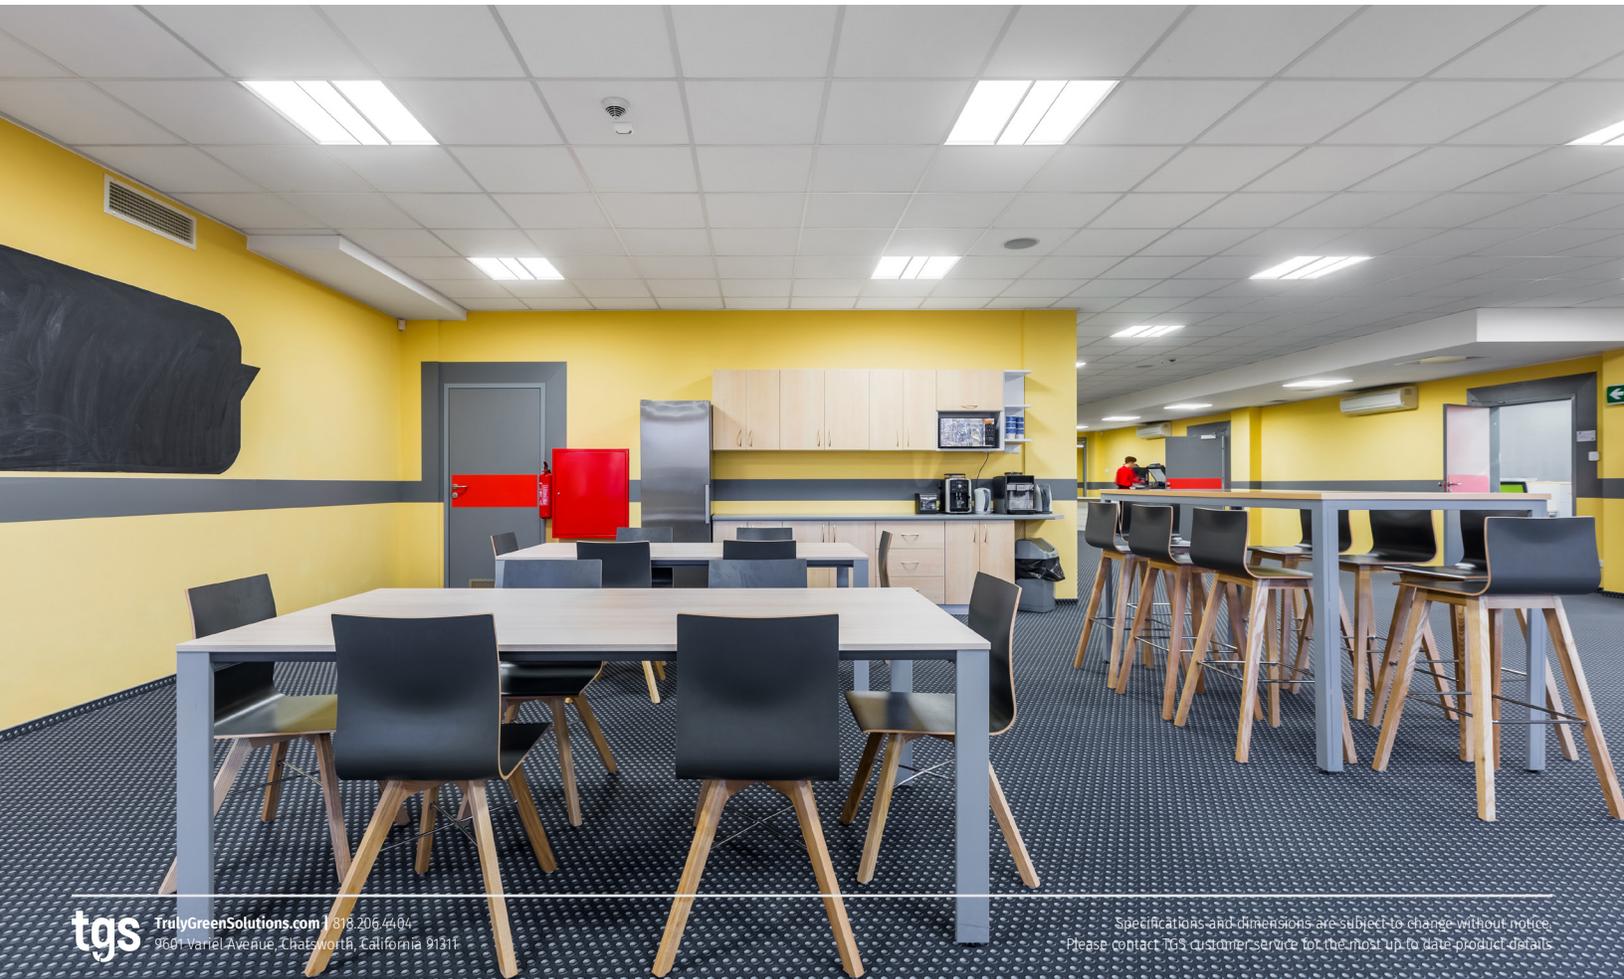



ELEMENT™ 2

Direct/Indirect Architectural Troffer

Construction

0.5mm Die-formed Cold-Rolled Steel Body

Finish

White

Electrical & Technical

Input Voltage: 100-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%

2x2 - 4CCT Selectable: 3000K / 3500K / 4000K / 5000K

Wattage Selectable: 24W / 35W / 40W

2x4 - 4CCT Selectable: 3000K / 3500K / 4000K / 5000K

Wattage Selectable: 30W / 35W / 40W / 50W

Controls

0-10V Dimming

EM Backup Accessories


8W EM Battery Backup



2' x 2'



2' x 4'

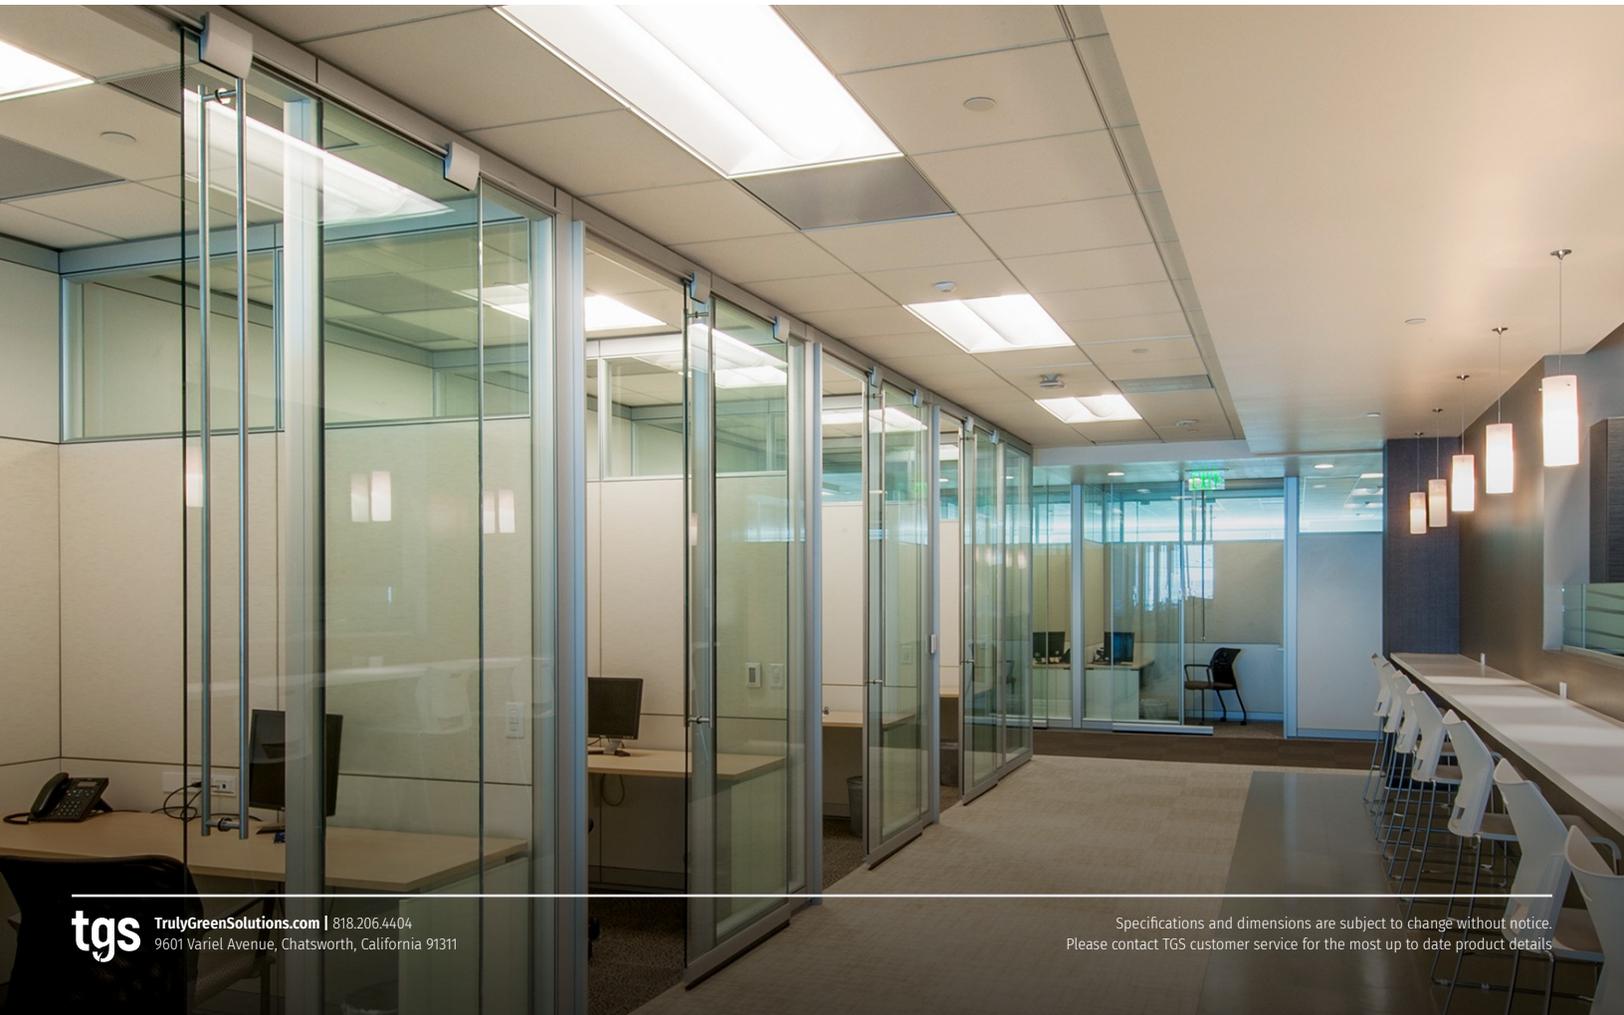



LUNAR™

Architectural Round

Construction

Shallow Extruded Aluminum Housing with Powder Coat Finish

Finish

Standard: Matte Black, Matte White, Titanium Silver

Custom Color Available

Electrical & Technical

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >90

THD: <20%

CCT: 2700K, 3000K, 3500K, 4000K, or 5000K

Controls

0-10V Dimming

EM Backup Accessories

10W Bodine Inverter

15W Emergency Inverter



Surface Mount



Pendant Mount



Cable Mount





FLUXLUME™ CS

Field Selectable Commercial Downlight

Construction

Regressed Aluminum Housing with Steel Spring Action Clips and Baffle Trim for Reduced Glare

Trim Colors

White (Standard), Brush Nickel, Black, or Bronze

Electrical & Technical

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >90

THD: <20%

5CCT Selectable: 2700K / 3000K / 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories

15W Emergency Inverter




6"



8"



10"

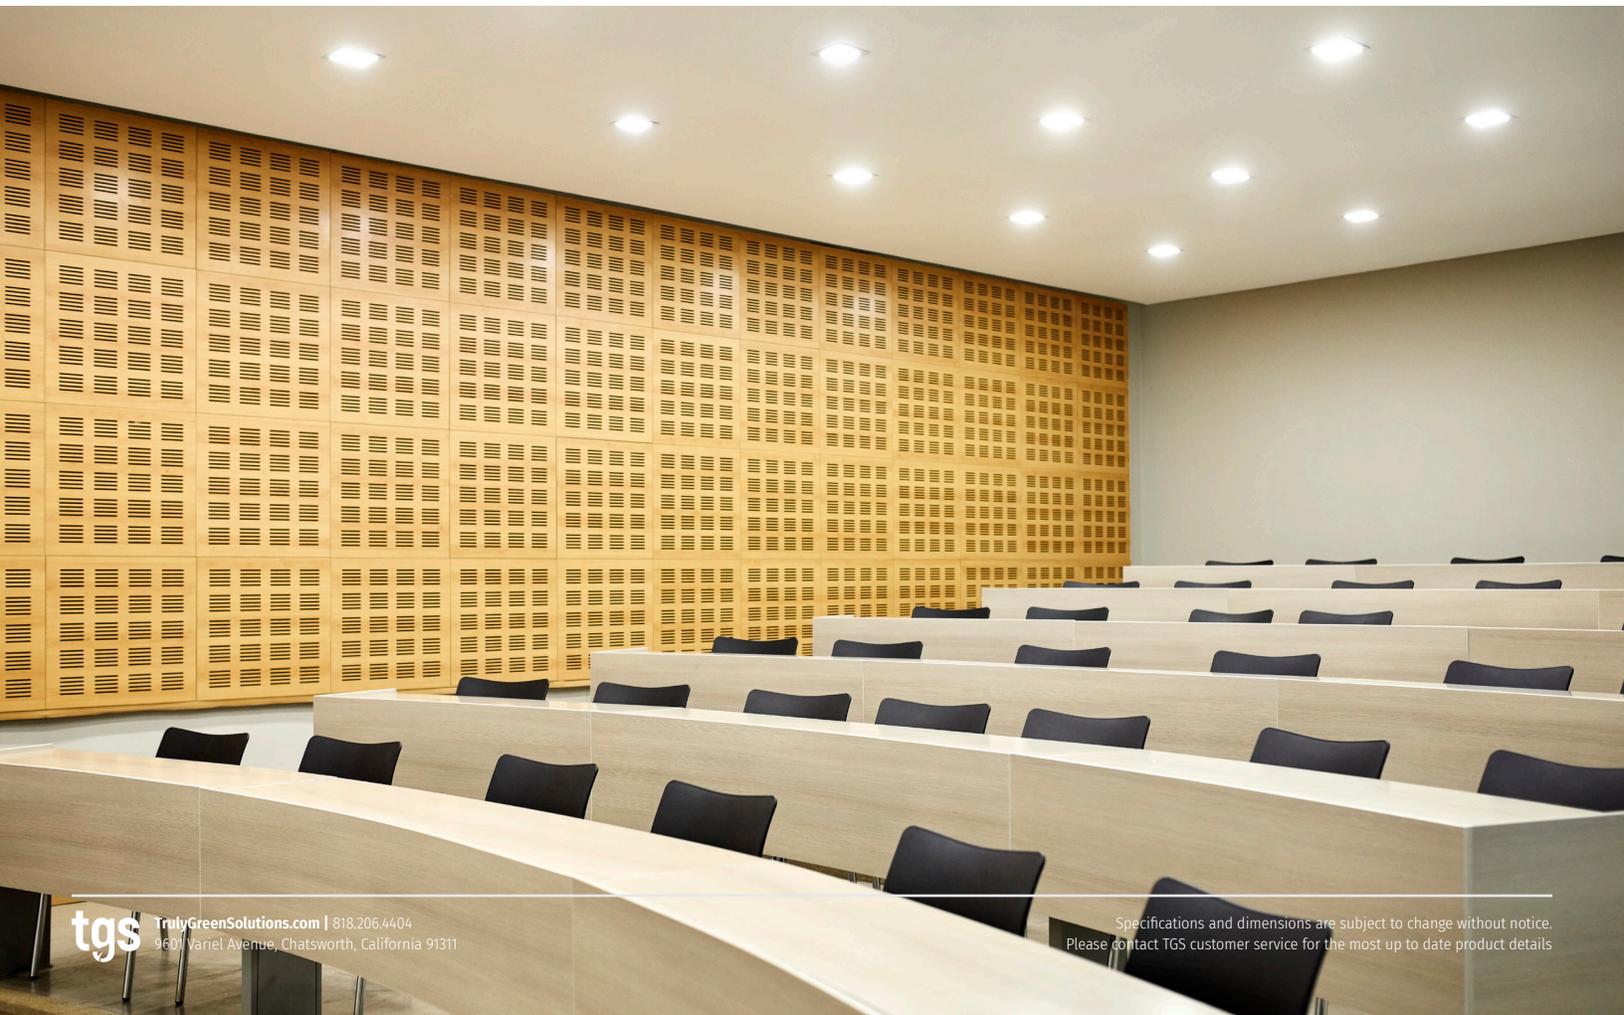



SPORTHB™

Sports High Bay

Construction

Die-Cast Aluminum (150W-300W)
Cold-Forged Aluminum (400W-500W)

Finish

Black (Standard) or White

Electrical & Technical

Input Voltage: 120-277V or 277-480V
Operating Temperature: -40°F to 131°F
Projected L70 > 100,000 hrs
PF: >0.95
CRI: >80 (Standard) or >90
THD: <20%
CCT: 3000K, 4000K, 5000K, or 5700K

Controls

1-10V Dimming
Bi-Level Occupancy / Daylight Harvesting Motion Sensor
SYNAPSE™ Wireless Control System

EM Backup Accessories

60W Emergency Inverter



150W - 300W



400W - 500W



POWERED BY
SYNAPSE



tgs **SPORTS**



TRITON™ G2

Sports Lighter

Construction

Cold-Forged Aluminum

Finish

Black (Standard) or White

Electrical & Technical

Input Voltage: 100-277V or 240-480V

Operating Temperature: -40°F to 131°F

Projected L70 > 100,000 hrs

PF: >0.95

CRI: >70 (Standard), >80 or >90

THD: <20%

CCT: 4000K, 5000K, or 5700K

Controls

0-10V Dimming

SYNAPSE™ Wireless Control System

EM Backup Accessories

60W Emergency Inverter



300W - 500W



750W - 1250W



POWERED BY

SYNAPSE

tgs SPORTS






FOLLOW US ON SOCIAL

Be the first to know about everything happening at TGS!



 **INSTAGRAM**

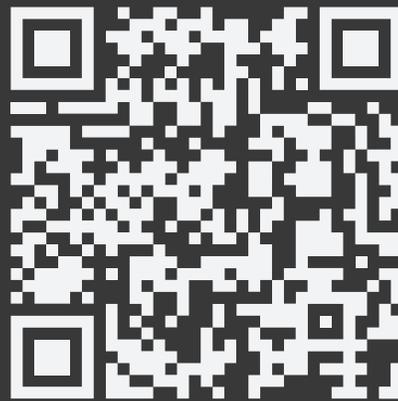

 **LINKEDIN**