



ThinTek™ Wafer R

Direct Mount Recessed

DESCRIPTION

The ThinTek™ Wafer series from TGS allows for easy installation from below the ceiling without the need for an existing can and is ideal for shallow ceiling plenum applications. The CCT switch allows for selection between 2700K, 3000K, 3500K, 4000K, and 5000K. With Title 24 certification, 90 CRI, and a variety of sizes and lumen packages, ThinTek™ Wafers provide versatility, reliable performance, and a fast, simple installation process.

APPLICATIONS

Residential, Institution, Hospitality, Retail, Offices, Schools, Hospitals, Airports and Hallways.

FEATURES

Construction

Die-cast aluminum housing and PC lens.
Air-tight IC Rated.

Optical System

Glare controlling lens for comfortable light distribution.
Provides a 110° beam angle.

Warranty

5 year warranty.
See warranty documentation for more information.

Electrical

Input voltage: 120VAC, 60Hz
25W High Voltage Emergency Battery Backup option available.
12" Power Cable (Standard): Extension Cable option available in 3' or 10'.

Installation/ Mounting

Recessed Mounting with adjustable spring loaded retention tabs for secure fixture.
New Construction Kit (4", 6", 8") and New Construction Kit with Hanger Bar (3", 4", 6") option available.

Controls/Dimming

Triac Dimming (Dims to 10%)
Tunable White between 2700K, 3000K, 3500K 4000K, 5000K.



120VAC/Triac Dimming

ThinTek™ Wafer R

- 3", 8W (500 lm)
- 4", 10W (650 lm)
- 4", 12W (850 lm)
- 6", 12W (900 lm)
- 6", 15W (1100 lm)
- 8", 18W (1500 lm)

Projected L70: 50,000+ hours
Warranty: 5 Years
Phase/ TRIAC Dimming (10%)



Ordering Information

EXAMPLE: TWRP-0308-C-S

Series	Size/Wattage	CCT Switchable	Input Voltage/Control
TWRP - ThinTek Wafer Round Flat	0308 - 3"/8W 0410 - 4"/10W 0412 - 4"/12W 0612 - 6"/12W 0615 - 6"/15W 0818 - 8"/18W	C - 2700K/3000K/3500K/4000K/5000K	S - 120VAC/Triac Dimming
		New Construction Kit TWR-NC (For 4", 6", 8")	Accessories TW-EC03 (3' Extension Cable) TW-EC10 (10' Extension Cable) 90025-H (25W High Voltage Emergency Battery Backup)
		New Construction Kit W/ Hanger Bar TWR-NCH (For 3", 4", 6")	

Specifications and Dimensions subject to change without notice.

Accessories are purchased separately.

*MOQ and longer lead times may apply, please contact customer service for more information.


Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	See Performance Table
CRI	>90
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	Triac /Phase Dimming (Compatible Dimmer List Available)
Operating Temp.	-4°~104°F

Photometric Data

6" 15W


* IESNA LM-63 IES Available

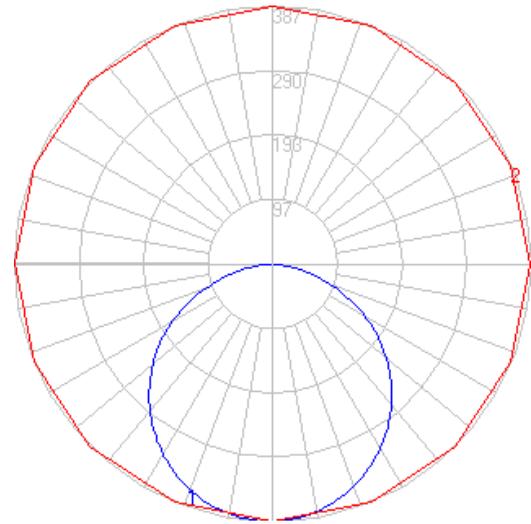

Performance Table

SKU	Size (in)	Wattage (W)	5000K	
			Delivered Lumens (lm)	Efficacy (lm/W)
TWRF-0308-C-S	3	8	500	63
TWRF-0410-C-S	4	10	650	65
TWRF-0412-C-S	4	12	850	71
TWRF-0612-C-S	6	12	900	75
TWRF-0615-C-S	6	15	1100	73
TWRF-0818-C-S	8	18	1500	83

Product Dimensions

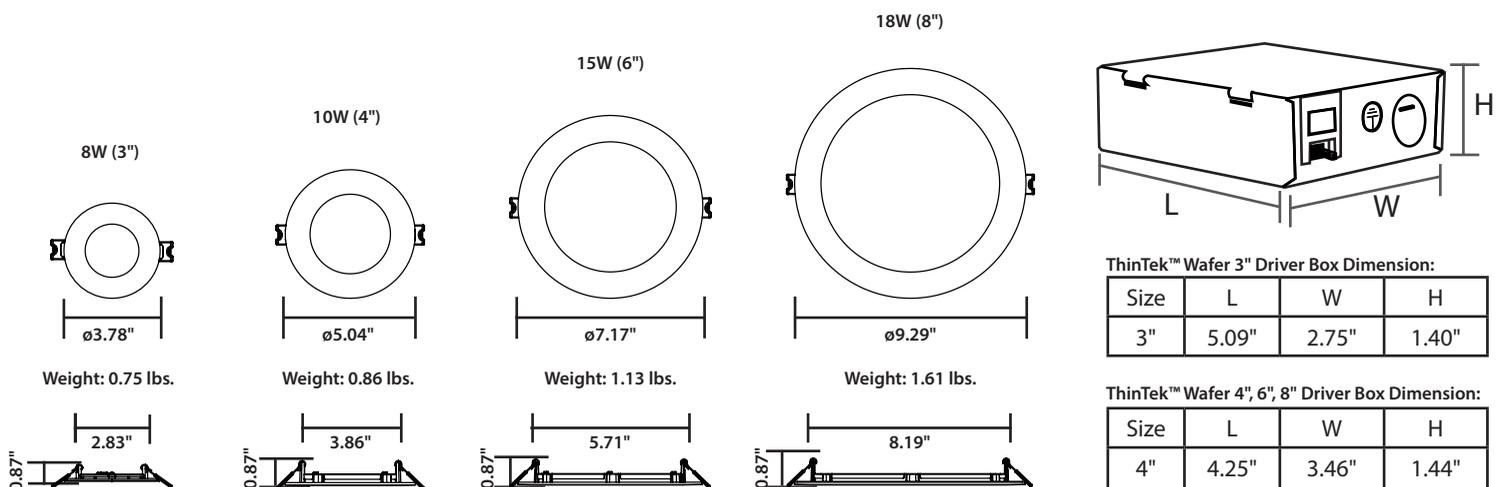

Installation Kits and Accessories



**4", 6", 8"
New Construction Kit
(Option)
[TWR-NC]**



**3", 4", 6"
New Construction Kit
With Hanger Bar
(Option)
[TWR-NCH]**



**3' or 10'
Extension Cable
(Option)
[TW-EC03, TW-EC10]**



**High Voltage
Emergency Backup
25W
(Option)
[90025-H]**

Dimmer Compatibility List

Recommended dimmers

Lutron	Leviton	EATON
DVCL-153PR-WH CTCL-153PDH-WH TGCL-153PH-WH MACL-153MH-WH P-PKG1W-WH-R	R62-06674-P0W R12-06672-1LW R50-IPL06-10M	SAL06P-LA-K