

Date:	
Project Name:	
SKU #:	

**AQUA™ R**

IP65 Round Cylinder Fixture

**APPLICATIONS**

Residential, Commercial, Multi-Family Complex, Hospitality

**FEATURES****Construction**

- Die-cast Aluminum Base
- Spun Aluminum Body

**Optical**

- Beam Angles:
  - 20°
  - 40°

**Electrical & Technical**

- Input Voltage: 100-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 2700K, 3000K, 3500K, 4000K
- Operating Temp.: -40°F ~ 122°F
- IP Rating: IP65

**Installation/Mounting**

- Pendant Mount:
  - 3.3' Cable [Standard]
  - 3.3' Stem [Standard] [Custom Length\*]
- Surface Mount

**Controls**

- Triac Dimming [Option]
- 0-10 Dimming [Option]

**Warranty**

- 5 Year Warranty
- See warranty documentation for more information.

**Lumen Output**

- $\phi 3.75' \times 6' / 15W$ : 1,200lm
- $\phi 3.75' \times 6' / 20W$ : 1,600lm
- $\phi 4.5' \times 6' / 30W$ : 2,400lm
- $\phi 5.5' \times 6.37' / 40W$ : 3,200lm
- $\phi 5.5' \times 6.37' / 50W$ : 4,000lm
- $\phi 6.62' \times 7.12' / 60W$ : 4,400lm
- $\phi 8.12' \times 8.37' / 90W$ : 6,500lm

**HOUSING FINISHES**

Black White

**REFLECTOR FINISHES**


Black White Silver

**ORDERING INFORMATION****EXAMPLE: AQR-0306-15-30-D-BK-WH-CM**


Series	Size	Wattage	CCT	Beam Angle	Dimming	Finish	Reflector	Mounting Option
AQR	0306 - D: 3" x H: 6"	15 - 15W 20 - 20W	27 - 2700K 30 - 3000K	20 - 20° 40 - 40°	D - Triac Dimming D1 - 0-10V Dimming	BK - Black WH - White	BK - Black WH - White SV - Silver	CM - Cable Mount [3.3'] ST - Stem Mount [3.3'] SM - Surface Mount
	0406 - D: 4" x H: 6"	30 - 30W	35 - 3500K					
	0506 - D: 5" x H: 6"	40 - 40W 50 - 50W	40 - 4000K					
	0607 - D: 6" x H: 7"	60 - 60W						
	0808 - D: 8" x H: 8"	90 - 90W						

**DIMENSIONS**

**Pendant Mount**

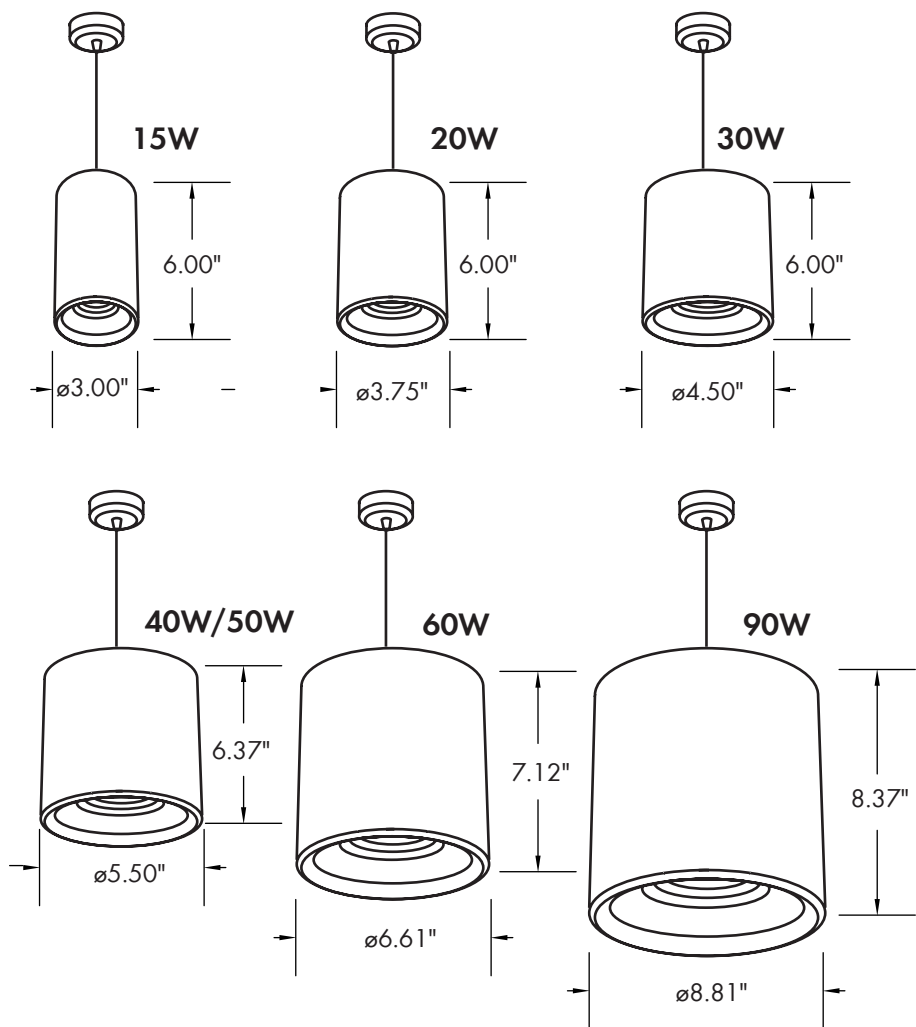

**Surface Mount**  
**15W/20W**

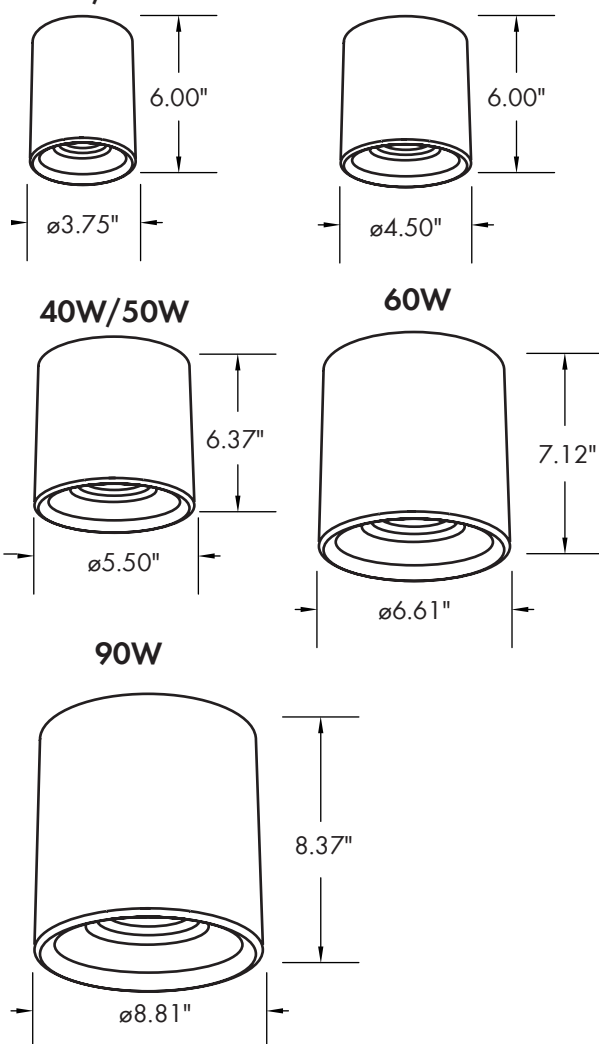

**LUMEN OUTPUT**

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
AQR-0306-15-30-D-BK-WH-XX	$\varnothing 3.75 \times 6$	15	1200	80
AQR-0306-20-30-D-BK-WH-XX	$\varnothing 3.75 \times 6$	20	1400	70
AQR-0406-30-30-D-BK-WH-XX	$\varnothing 4.5 \times 6$	30	2400	80
AQR-0506-40-30-D-BK-WH-XX	$\varnothing 5.5 \times 6.37$	40	3200	80
AQR-0506-50-30-D-BK-WH-XX	$\varnothing 5.5 \times 6.37$	50	4000	80
AQR-0607-60-30-D-BK-WH-XX	$\varnothing 6.61 \times 7.12$	60	4400	73
AQR-0805-90-30-D-BK-WH-XX	$\varnothing 8.12 \times 8.37$	90	6500	72