



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION



- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -22°F to 104°F and to be horizontally mounted with the LEDs facing down.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Note: Suggested mounting heights for luminaire no higher than 30m (98ft)

Installation




Loop Mount





Pendant Mount

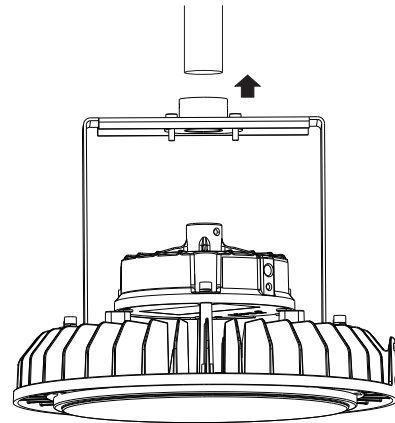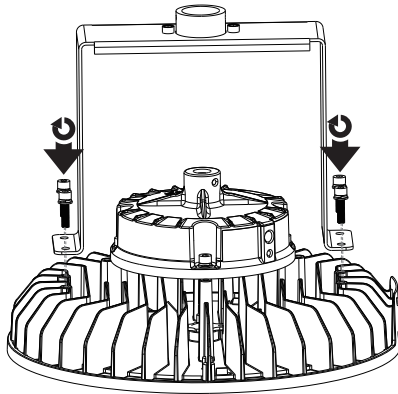


Surface Mount

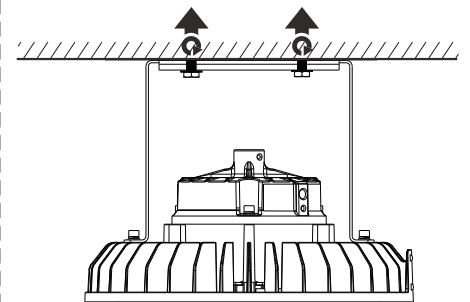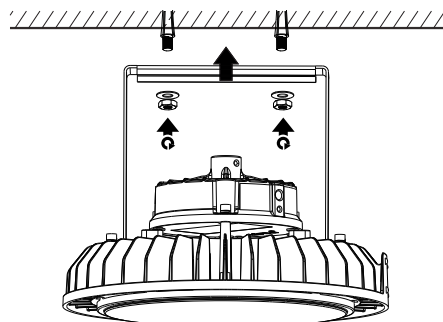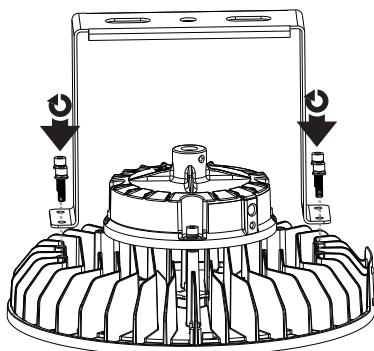

Bi-level Occupancy/Daylight Harvesting Sensor

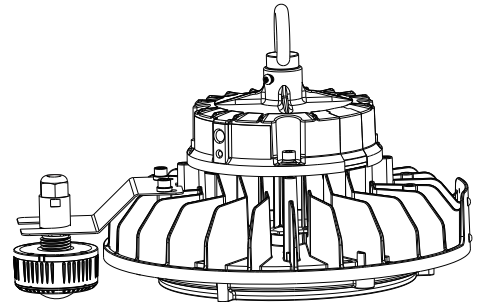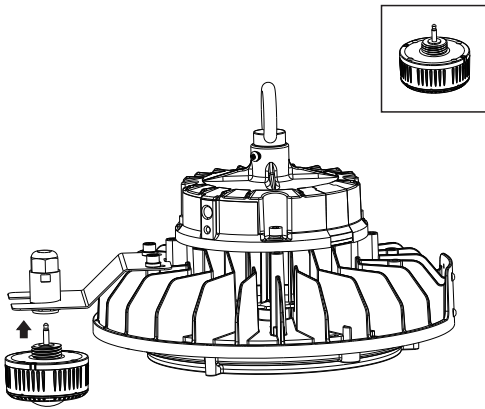

Wattage and CCT Selectable

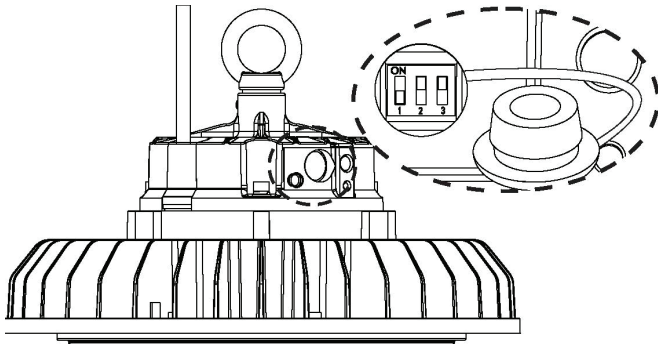

Caution:


Please power off the luminaire before adjusting the DIP switch.
Please do not use metal tool to adjust the DIP switch.
Please adjust the switch gently.

ON	1	2	3	
●	●	○	○	200W
■	○	●	○	150W
□	○	○	●	120W
○	○	○	○	100W
OFF	Max. 200W			

Wiring Diagrams

Dimmable

L	Brown	Black
N	Blue	White
GND	Yellow/Green	Green

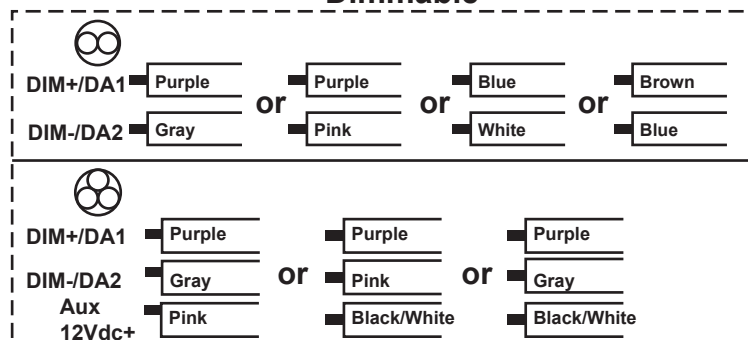

Warning!
Do Not Wire Dim Cord
To High Voltage or Dim
Function Will Fail.