


Date:	
Project Name:	
SKU #:	

**SL™**  
Surface Linear Edgelit Panel

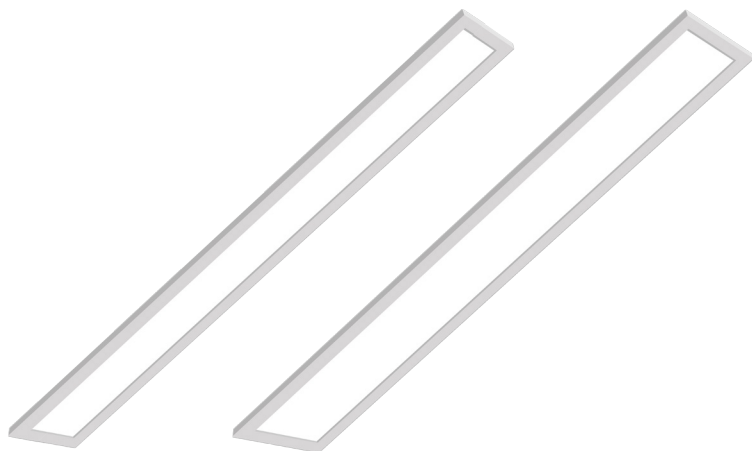

## APPLICATIONS

Commercial, Retail, Institution, and Hospitality

## FEATURES

### Construction

- Extruded Aluminum Frame & Stamped Aluminum Housing
- Acrylic Prismatic Light Guide Panel: Excellent Shielding & Fully Illuminated Appearance.

### Finish

- White

### Electrical & Technical

- Input Voltage: 100-277VAC
- Input Frequency: 50/60Hz
- Projected L70 > 54,000 hrs
- PF: >0.9
- CRI: 80 [Standard] or 90 [Option]\*
- THD: <20%
- CCT Selectable: 3000K/3500K/4000K
- Operating Temp.: -22°F ~ 122°F
- Damp Location Rated
- Integrated Driver
- 15W Emergency Inverter [Option]

### Optical

- Frosted Diffuser
- 110° Beam Angle with Uniformed Edge to Edge Illumination

### Installation/Mounting

- Surface Mount

### Controls

- 0-10V Dimming

### Lumen Output

- SL4-4: 20W (1,680lm)  
30W (2,520lm)  
40W (3,400lm)
- SL4-6: 20W (1,800lm)  
30W (2,650lm)  
40W (3,600lm)

### Warranty

- 5 Year Warranty
- See warranty documentation for more information.



## ORDERING INFORMATION


EXAMPLE: SL4-4-L-C-U-D-SK

Series	Size	Wattage	CCT	Input Voltage	Control	Mounting Options	CRI Option
SL4	4 - 4" 6 - 6"	L-20W/30W/40W	C - 3000K/3500K/4000K	U - 100-277VAC	D - 0-10V Dimming	SK - Surface Mount RM - Recessed Mount	90CRI* (Option)

### Accessories

TGS-15W-INT (15W Emergency Inverter)

**DIMENSIONS**

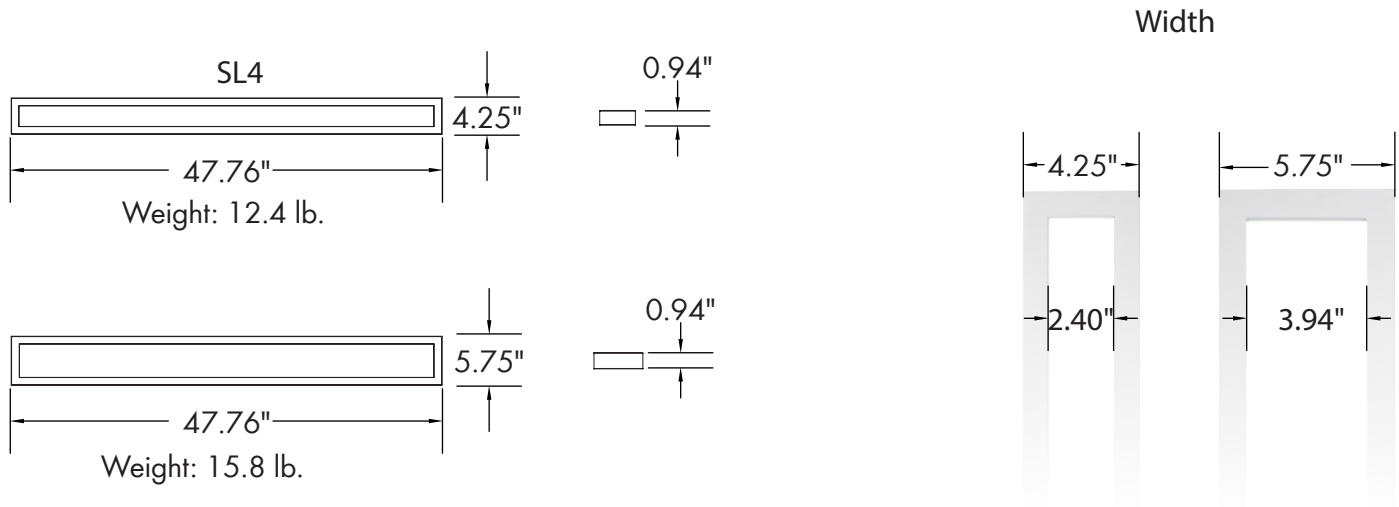

**LUMEN OUTPUT**

SKU	Size [L x W] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
SL4-4-L-C-U-D	48 x 4	20/30/40	1680/2520/3400	84
SL4-6-L-C-U-D	48 x 6	20/30/40	1800/2650/3600	90

**ACCESSORIES**



Surface Mount Plate  
[Included]



Emergency Inverter 15W  
(Option)  
[TGS-15W-INT]