

Date:	
Project Name:	
SKU #:	

Decorative Dome Round Fixture
Flush Mount Ceiling Light



APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Steel Housing with Powder Coating Paint.

Finish

- Bronze
- Satin Nickel

Electrical & Technical

- Input Voltage: 120V
 - Input Frequency: 60Hz
 - Projected Life: L70 > 50,000 hrs
 - PF: >0.95
 - CRI:>83
 - THD: <20%
 - CCT Selectable: 2700K/3000K/3500K/
 4000K/5000K
 - Operating Temp.: -4°F~104°F
 - Damp Location Rated

Optical

- Plastic Lens

Installation/Mounting

- Flush Mounted Ceiling

Controls

- Triac Dimming

Lumen Output

- 11"/15W: 900lm
- 13"/15W: 900lm
- 15"/25W: 1,500lm

Warranty


- 5 Year Warranty
 See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: GSMF-1115-C-SN**


GSMF			
Series	Size/Wattage	CCT	Finish
GSMF	1115 - 11"/15W 1315 - 13"/15W 1525 - 15"/25W	C - 2700K/3000K/3500K/4000K/5000K	BZ - Bronze SN - Satin Nickel

DIMENSIONS




ø11"

Weight: 1.72 lb.

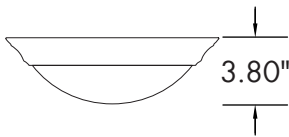


3.80"




ø13"

Weight: 2.29 lb.

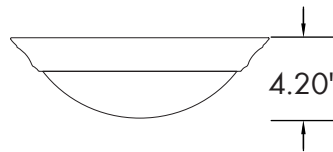


4.20"

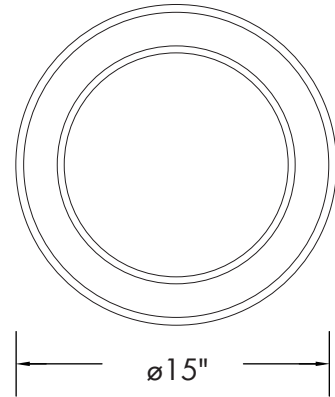

ø15"

Weight: 2.72 lb.

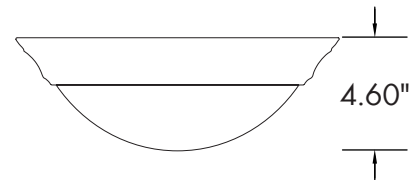

4.60"

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
GSMF-1115-C-XX	ø11	15	900	60
GSMF-1315-C-XX	ø13	15	900	60
GSMF-1525-C-XX	ø15	25	1500	60