

tgs

CONTOUR™ TROFFER



CONTOUR™ Troffer

Designed to deliver an unprecedented uniformity and functionality, this curved troffer features a compact yet sturdy aluminum construction designed to blend into modern architectural spaces. Featuring a low profile form factor, it is ideal for buildings with a low plenum space and is suitable for all standard grid ceilings. The specification grade CONTOUR™ Troffer Series is available in 2x2, 2x4, 1x4 sizes and perfect for offices, schools, and healthcare applications, goes beyond what was previously possible with traditional LED luminaires.

Original & Innovative Design

Designed from the ground up in TGS, this curved luminaires carry the meticulous processes of research, design, and engineering that is inherent to all specification-grade fixtures from TGS. This domestic design process allows us to deliver top quality fixtures, ensuring high-grade componentry and support from a team that truly cares about the product we build.



Performance

The CONTOUR™ Troffer series provides quiet and smooth illumination for visual comfort while maximizing efficiency.

- 2'x2', 2'x4', 1'x4'
- DLC available
- 3500K, 4000K, and 5000K CCT adjustable
- Wattage adjustable
- Minimum 82 CRI



Sleek Profile


The CONTOUR™ Troffer features a back-lit curved lens and distinct center detail. CCT and wattage adjustable function make the CONTOUR™ Troffer Series a diverse addition to the TGS product family.


2'x2', 2'x4', 1'x4': 1.74" Deep



No Delays When Power Fails!

This CONTOUR™ Troffer has emergency function option. The built-in LED Emergency Driver will immediately switches to the emergency mode, operating up to 120 minutes in event of power failure. When AC power is restored, the emergency driver will automatically returns to the charging mode.

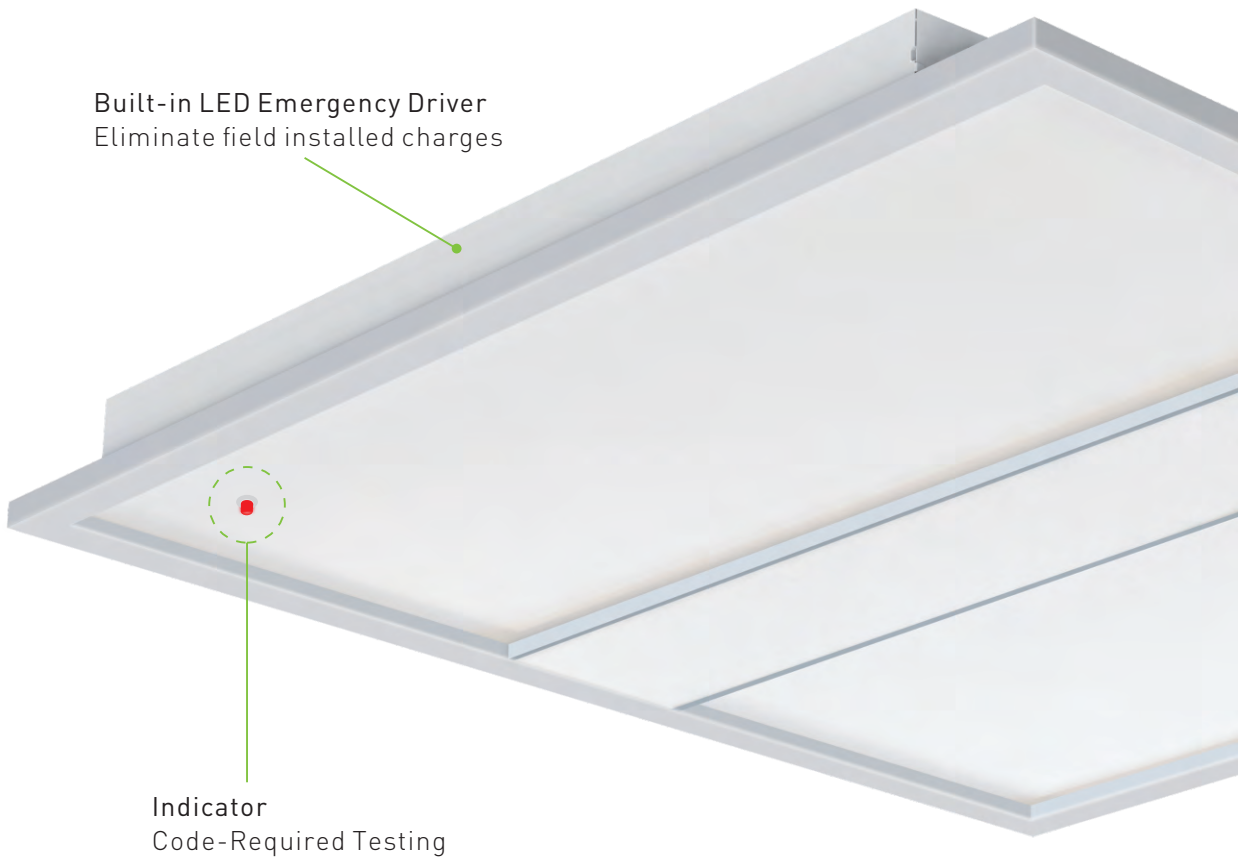

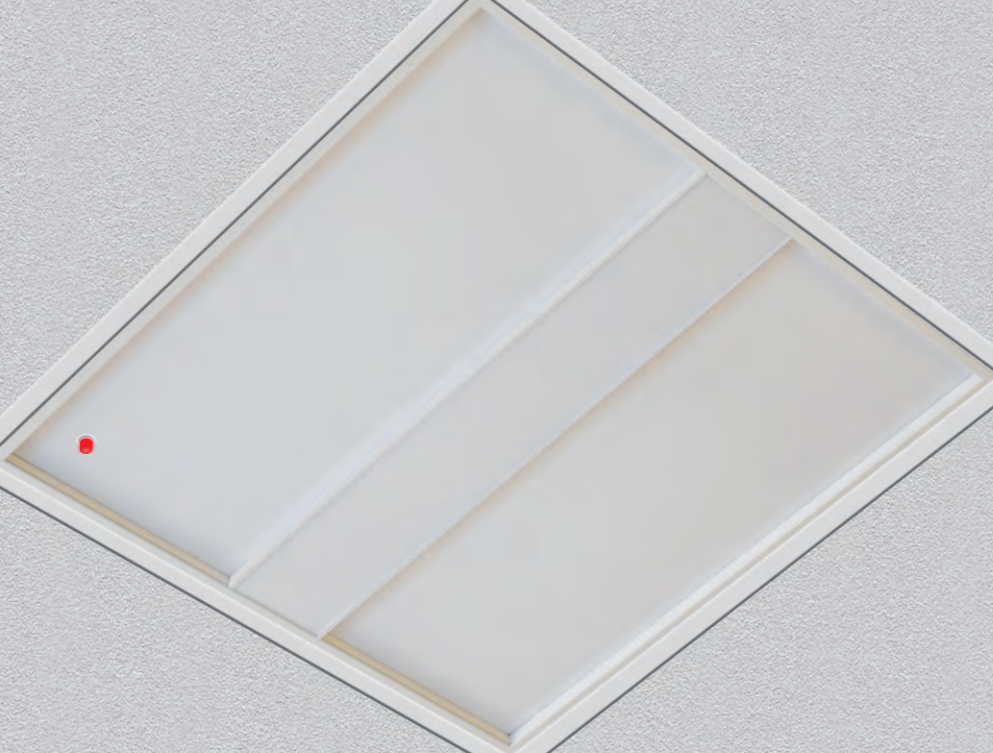

It works with most ceiling types which will be your go-to-choice for offices, schools, hospital.





35W/30W/25W Adjustable —
3500K/4000K/5000K Adjustable —



50W/40W/30W Adjustable —
3500K/4000K/5000K Adjustable —



35W/30W/25W Adjustable —
3500K/4000K/5000K Adjustable —

Evenly illuminated
back-lit curved
diffuse lens