

Date:	
Project Name:	
SKU #:	

**Single Ring Round Fixture**  
Flush Mounted



**APPLICATIONS**

Residential, Commercial, Multi-Family Complex

**FEATURES**

**Construction**

- Die-formed Cold-Rolled Steel
- Powder Coated Paint

**Finish**

- Brushed Nickel
- White\*
- Black\*
- Oil Rubbed Bronze\*

**Electrical & Technical**

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.95
- CRI: >80 or >90 [Option]
- THD: <20%
- CCT Selectable: 3000K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

**Optical**

- High Transmission Acrylic Lens

**Installation/Mounting**

- Flush Mount

**Controls**

- Triac Dimming

**Compliance**

- JA8 TITLE 24 Compliant at 90CRI

**Dimmer Compatibility List:**

Leviton: IPL06-10Z, 6672-1LW, 6674-POW, DLS061LZ  
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

**Lumen Output**

- 11"/15W: 1,100lm
- 14"/25W: 1,800lm

**Warranty**




- 5 Year Warranty  
See warranty documentation for more information.






**ORDERING INFORMATION** **EXAMPLE: SRRC-1115-CC-SN**

SRRC				
Series	Size/Wattage	CCT	Finish	CRI
SRRC	1115 - 11"/15W 1425 - 14"/25W	CC - 3000K/4000K/5000K	BN - Brushed Nickel BK - Black* WH - White* OB - Oil Rubbed Bronze*	90CRI [Option]

DIMENSIONS

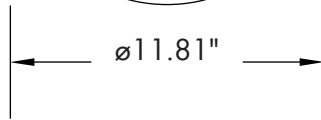

Weight: 1.87 lb.

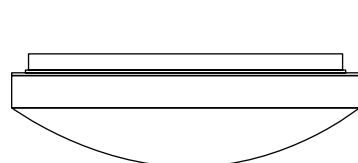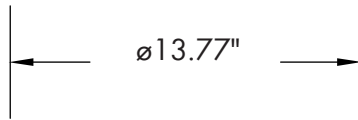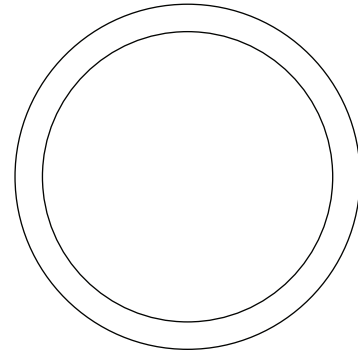

Weight: 2.53 lb.

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
SRRC-1115-CC-XX	11	15	1100	73
SRRC-1425-CC-XX	14	25	1800	72