

Date:	
Project Name:	
SKU #:	

ICON S4™
Icon Series Square Downlight 4"



SBT - Square Baffled Trim



STL - Square Trimless

APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES

Construction

- Aluminum Housing

Finish

- White
- Black Trim [Option]

Electrical & Technical

- Input Voltage: 120VAC
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Air-Tight Rated

Optical

- White PC Lens
- Available Beam Angles:
 - 24°
 - 38°
 - 60°

Installation/Mounting

- Spring Clip Mount [W/Trim]
- Flush to Ceiling [Trimless]

Controls

- Triac Dimming

Compliance


- JA8 TITLE 24 Compliant

Lumen Output

- 4"/15W: 1000lm
- 4"/18W: 1500lm

Warranty





- 5 Year Warranty
See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: ICON-S-4-15-5C-24-SBT-WH**

Series	Size	Wattage	CCT	Beam Angle	Trim Type	Trim Finish	Options
ICON-S	4 - 4"	15 - 15W 18 - 18W	5C - 2700K/3000K/ 3500K/4000K/5000K	24 - 24° 38 - 38° 60 - 60°	SBT - Square Baffled Trim STL - Square Trimless	BK - Black WH - White	ICON-S-NC [New Construction Plate W/ Hanger Bar] FLEX-4 [4' Flexible Connector] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector]

DIMENSIONS

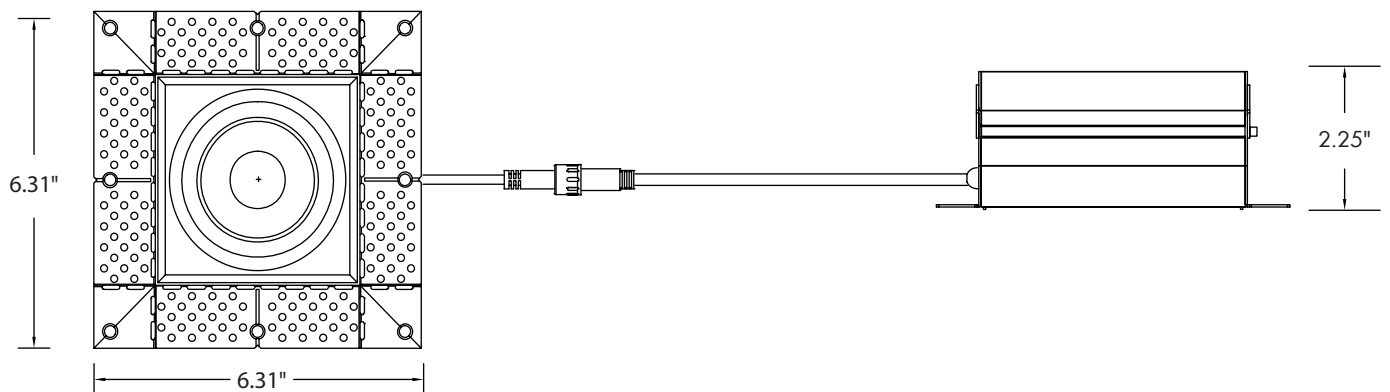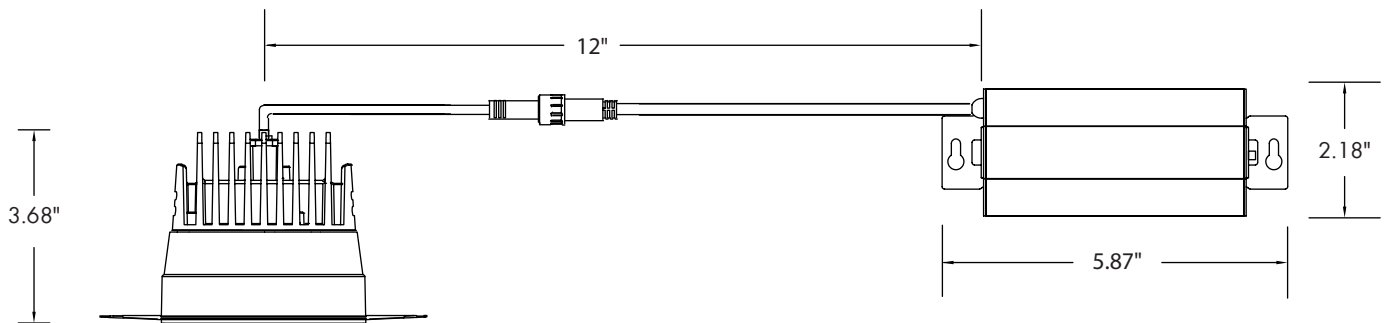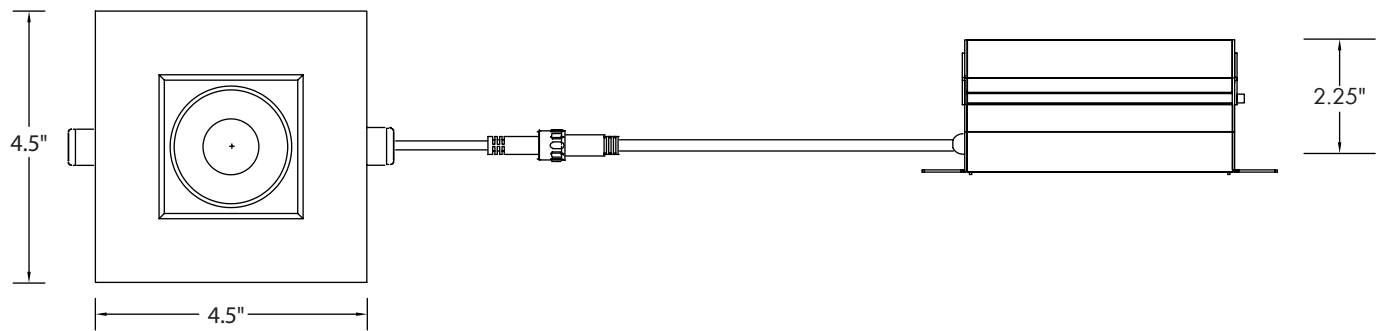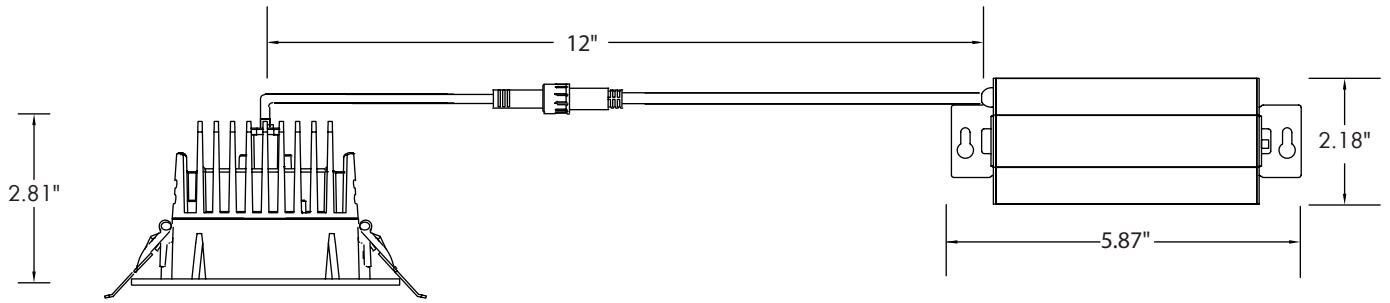

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-S-4-15-5C-38-SBT-WH	4	15	1000	66
ICON-S-4-18-5C-38-SBT-WH	4	18	1500	83


ACCESSORIES



Square Baffled Trim [SBT]



Square Trimless [STL]

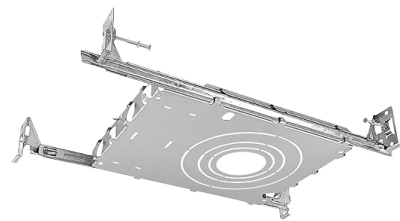


New Construction Kit W/ Hanger Bar 2"/3"/3.5"/4" [ICON-S-NC]

COMPLETED PRODUCT



ICON S4™
Square Baffled Trim

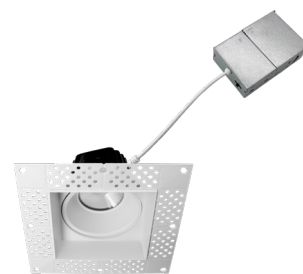

ICON S4™
Square Trimless