

COMPATIBILITY
 - Eco™ AIR LC
 - Eco™ Panel 130
 - Eco™ Panel 110

DETAILS:

Item #: 8814-SK

• 1X4 List:

- 2 pcs - 47.56"x2.00" Aluminum Mounts
- 2 pcs - 12.00"x2.00" Aluminum Mounts
- 8 pcs - Assembly Screws (0.5" Countersunk Screws)
- 12 pcs - Drywall Anchors
- 12 pcs - 1.25" Mounting Screws

Dimension:

L: 47.56"
 W: 12.00"
 H: 2.00"



Item #: 8822-SK

• 2X2 List:

- 2 pcs - 23.69"x2.00" Aluminum Mounts
- 2 pcs - 23.88"x2.00" Aluminum Mounts
- 8 pcs - Assembly Screws (0.5" Countersunk Screws)
- 6 pcs - Drywall Anchors
- 6 pcs - 1.25" Mounting Screws

Dimension:

L: 23.69"
 W: 23.88"
 H: 2.00"




Item #: 8824-SK

• 2X4 List:


- 2 pcs - 47.56"x2.00" Aluminum Mounts
- 2 pcs - 23.88"x2.00" Aluminum Mounts
- 8 pcs - Assembly Screws (0.5" Countersunk Screws)
- 12 pcs - Drywall Anchors
- 12 pcs - 1.25" Mounting Screws

Dimension:

L: 47.56"
 W: 23.88"
 H: 2.00"

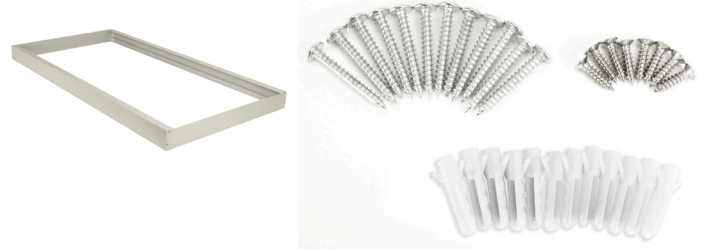

2x2
Top View




Side Interior View




End Cap Side View


1x4 & 2x4
Top View



Side Interior View




1x4



2x4

End Cap Side View

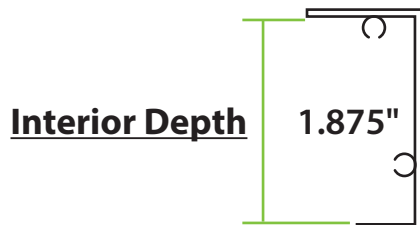


Eco™ Panel Installation

1. Assemble three sides of the surface mount kit and mount it to the ceiling. (Fig 1.)
2. Slide fixture into the the surface mount and close it up. (Fig 2.)

Fig 1.



Fig 2.

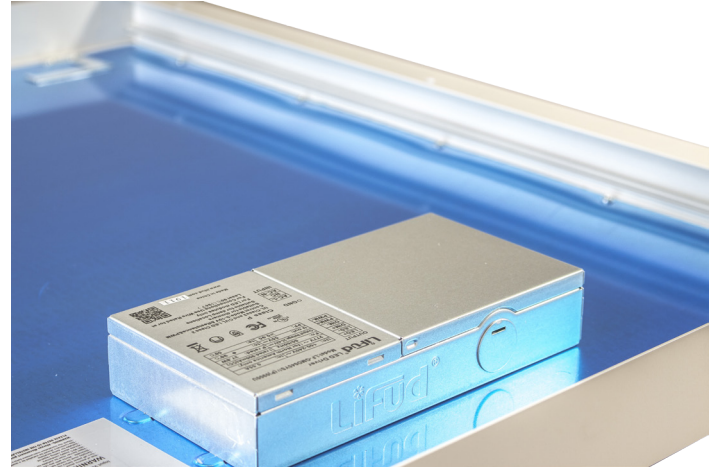

Eco™ AIR (LC) Installation

1. Assemble three sides of the surface mount kit and mount it to the ceiling. (Fig 3.)
2. Slide fixture into the the surface mount and close it up. (Fig 4.)

Fig 3.



Fig 4.

